

## E20-370<sup>Q&As</sup>

Networked Storage - CAS Implementation

**Pass EMC E20-370 Exam with 100% Guarantee**

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/e20-370.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by EMC  
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



## QUESTION 1

How does EMC Centera ensure content integrity?

- A. A universally unique hashing algorithm signature guarantees the storage of only a single instance of a BLOB object.
- B. EMC Centera sets retention on every object.
- C. EMC Centera uses shredded deletes to overwrite the location of deleted CDFs.
- D. Every time an object is read, EMC Centera calculates the Content Address of the object requested and compares the results.

Correct Answer: D

---

## QUESTION 2

On an EMC Centera running CentraStar 3.1, the cluster mask is rdqew, the applicable pool mask is rdeDwc, and the applicable profile allows rqDwc. What are the allowed effective rights?

- A. rDw
- B. rDwc
- C. rqwc
- D. rw

Correct Answer: D


---

## QUESTION 3

Click the Exhibit button

During the design of a C2C migration the customer requests that the migration limits the performance impact on the production EMC Centera. The customer also requests that a full DR copy of data is available throughout the migration process. Which design accomplishes the requests given the following conditions?

EMC Centera A is the old production EMC Centera EMC Centera B is the old DR EMC Centera EMC Centera C is the new production EMC Centera EMC Centera D is the new DR EMC Centera

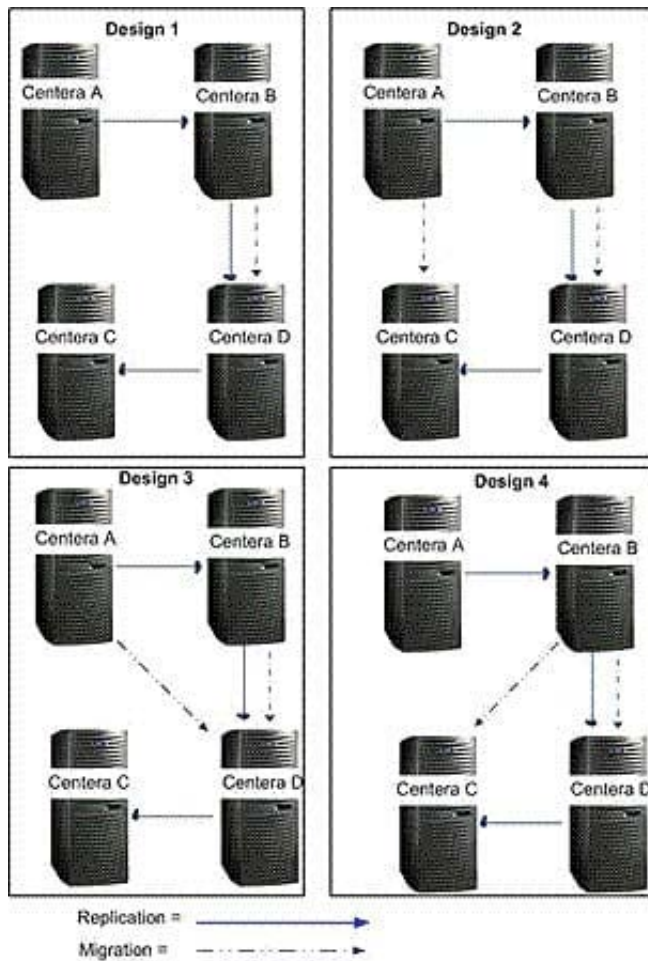

- A. 1
- B. 2
- C. 3
- D. 4

Correct Answer: A

### QUESTION 4

A customer has an existing Gen4 cluster and purchased new Gen4LP nodes. Which requirement must be confirmed for the LP nodes to be successfully added?

- A. All nodes in the cluster must have the same drive sizes
- B. CentraStar code must be at 3.1.3 or later
- C. CentraStar code must be patched to sp3
- D. LP nodes must be access nodes in a heterogeneous cluster

Correct Answer: B

## QUESTION 5

A customer wants to implement an IP Access Control List to allow only a single server to be able to access a CIFS share on a CUA.

What is the entry to enable the restriction?

- A. hosts allow = 192.168.0.0/255.255.255.0
- B. hosts allow = 192.168.1.10
- C. hosts allowed = 192.168.1.10
- D. hosts allowed = 192.168.1.10/255.255.255.0

Correct Answer: B

[E20-370 PDF Dumps](#)

[E20-370 VCE Dumps](#)

[E20-370 Exam Questions](#)