

210-010^{Q&As}

VCE Vblock™ Systems Deployment and Implementation - Core Exam

Pass VCE 210-010 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/210-010.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by VCE Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

What is the number of domains required when deploying a Vblock System 720 with 16 UCS chassis on a single pair of fabric interconnects?

- A. 1
- B. 2
- C. 4
- D. 8

Correct Answer: A

QUESTION 2

What is the hot spare drive requirement for a Vblock System 320 storage array?

- A. Hot spare drives must exist for every 100 drives of any type drive in the array.
- B. Hot spare drives must exist for every 100 drives of the same type drive in the array.
- C. Hot spare drives must exist for every 30 drives of the same type drive in the array.
- D. Hot spare drives must exist for every 30 drives of any type drive in the array.

Correct Answer: C

QUESTION 3

According to VCE, which three statements are regarded as best practice for vMotion deployment? (Choose three.)

- A. On each host, configure a VMkernel port group for vMotion.
- B. VMKernel port must be on the virtual machine management network.
- C. Use one dedicated GbE adapter for vMotion.
- D. Ensure that virtual machines have access to the same subnets on source and destination hosts.
- E. Use jumbo frames configured through QoS.

Correct Answer: ADE

QUESTION 4

A VCE professional services engineer encounters a blade issue on a Cisco UCS B-230 during a Vblock implementation. VCE Support requires the show tech-support log bundle to further isolate the problem.

For which two Cisco UCS components will VCE Support require the log bundle? (Choose two.)

- A. UCSM
- B. blade
- C. adapter
- D. chassis

Correct Answer: AD

QUESTION 5

A host has been placed into maintenance mode in a Distributed Resource Scheduler (DRS) enabled cluster for patching. The virtual machines have not migrated as expected. DRS settings have been verified as fully automated at the cluster level.

What would cause this condition?

- A. The selected host is using a different ESXi version than the rest of the cluster.
- B. vMotion is not enabled on the vMotion vmkernel interface for the selected host.
- C. The high availability agent has not been properly installed on the selected host.
- D. DNS is not enabled at the host level for the selected host.

Correct Answer: B

QUESTION 6

A Cisco Unified Computing System (UCS) blade encounters a hardware failure that requires the service profile to be associated to another blade.

Once the service profile is associated to another blade, how does the host boot the existing operating system?

- A. The service profile maintains pointers to the local hard drives on the failed blade allowing true stateless migration.
- B. The service profile maintains the boot-policy to ensure the replacement blade boots to the existing LUN on the storage array.
- C. The service profile migrates the hard drive content from the failed blade to the new blade during service profile re-assignment.
- D. The service profile migration requires that the drives from the failed blade are physically migrated to the replacement blade to boot the existing operating system.

Correct Answer: B

QUESTION 7

You are deploying a Vblock System and you are unable to log in to the vCenter server using single sign-on (SSO).

Which two steps should be verified? (Choose two.)

- A. Log in credentials are correct.
- B. vCenter server is licensed.
- C. vCenter services are started.
- D. The single sign-on server is licensed.

Correct Answer: AC

QUESTION 8

In a Vblock System 720, what is the maximum standard LUN size on an EMC Symmetrix VMAX 10K/20K/40K?

- A. 20 GB
- B. 64 GB
- C. 240 GB
- D. 2,457 GB

Correct Answer: C

QUESTION 9

The implementation profile located in the Logical Configuration Survey (LCS) identifies if the customer will be using which two solutions? (Choose two.)

- A. EMC SnapView
- B. Cisco IAC
- C. Cisco Unified Communications
- D. VMware vCloud Director

Correct Answer: CD

QUESTION 10

You are installing a Vblock System 720 and notice that no Cisco UCS B230 blades are logging into the Cisco MDS 9148 switches.

Which feature must be enabled on the Cisco MDS 9148 to resolve the issue?

- A. NPIV

B. TACACS+

C. RADIUS

D. NPV

Correct Answer: A

QUESTION 11

Which protocol is used to provide unified file storage connectivity to a Vblock System 320?

A. FCoE

B. IP


C. iSCSI

D. FC

Correct Answer: B

QUESTION 12

-- Exhibit -

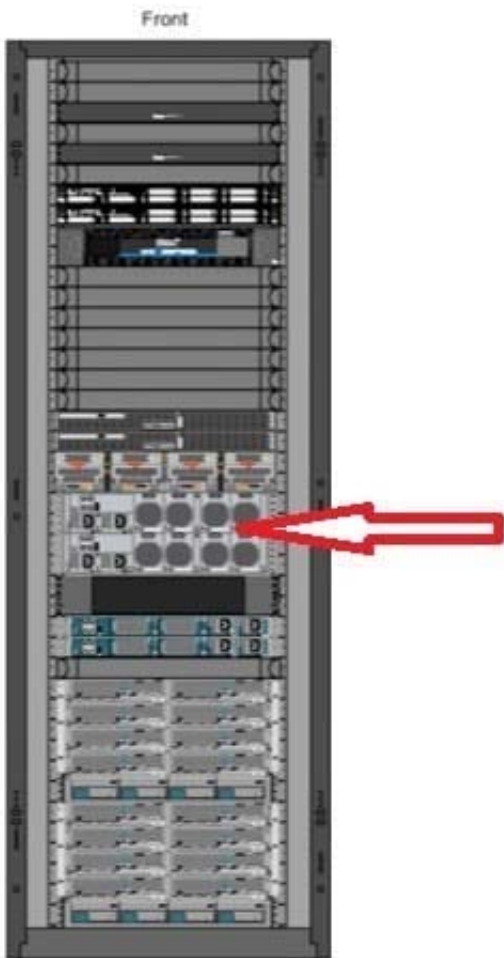

Click the Exhibit button.

Which Vblock System 720 component is shown in the exhibit?

- A. Cisco Catalyst 3750-X
- B. Cisco Nexus 5596UP
- C. Cisco Catalyst 3650
- D. Cisco Nexus 5020

Correct Answer: B

QUESTION 13

A Vblock System 720 has been configured in the factory according to the VCE Logical Build Guide. Which statement is correct?

- A. Each service-profile should have at least one vNIC pinned to fabric interconnect A; one vNIC pinned to fabric interconnect B, and failover enabled.

B. Each service-profile should have at least one vNIC pinned to fabric interconnect A; one vNIC pinned to fabric interconnect B, and failover disabled.

C. Each service-profile should have at least one vHBA pinned to fabric interconnect A; one vHBA pinned to fabric interconnect B, and failover enabled.

D. Each service-profile should have at least one vHBA pinned to fabric interconnect A; one vHBA pinned to fabric interconnect B, and failover disabled.

Correct Answer: B

QUESTION 14

You are adding a new VLAN from the Cisco Nexus 1000V. You use the state enabled command. What is the result of this command?

A. It creates a new VLAN in the Cisco Nexus 1000V.

B. It creates a new VMkernel port in the ESXi host.

C. It creates a new VLAN in the Cisco fabric interconnects.

D. It creates a port group in the vCenter server.

Correct Answer: D

QUESTION 15

In a Cisco Nexus 1000V, what is the default number of ports created in a vEthernet port profile?

A. 32

B. 128

C. 256

D. 512

Correct Answer: A

[Latest 210-010 Dumps](#)

[210-010 Practice Test](#)

[210-010 Braindumps](#)