

200-401^{Q&As}

Managing Industrial Networks with Cisco Networking Technologies
(IMINS)

Pass Cisco 200-401 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/200-401.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

- ⚙ **Instant Download** After Purchase
- ⚙ **100% Money Back** Guarantee
- ⚙ **365 Days** Free Update
- ⚙ **800,000+** Satisfied Customers



QUESTION 1

An Ethernet cable is attached to a PC NIC and then attached to a switch port. The PC power is turned on and the switch port link LED turns green. The link light indicates what two conditions? (Choose two.)

- A. Layer 2 communication has been established between the PC and switch.
- B. The PC has received a DHCP address.
- C. Traffic is being sent from the switch to the PC.
- D. If flashing, the green LED indicates port speed of 100 Mb/s.
- E. The Layer 1 media is functioning between the PC and switch.
- F. The switch port is functioning as a half-duplex connection.

Correct Answer: AE

QUESTION 2

Exhibit: Refer to the exhibit. A technician enters the exhibited commands to configure a new router on the plant floor, but receives an error message when attempting to save the configuration. What can the technician do to correct the problem?

```
Router# configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)# hostname Gateway
Gateway(config)# enable secret class
Gateway(config)# interface FastEthernet 0/0
Gateway(config-if)# ip address 192.168.1.254 255.255.255.0
Gateway(config-if)# no shutdown
Gateway(config-if)# exit
Gateway(config)# interface serial 0/0
Gateway(config-if)# ip address 201.86.5.1 255.255.255.252
Gateway(config-if)# no shutdown
Gateway(config-if)# line vty 0 4
Gateway(config-line)# password cisco
Gateway(config-line)# login
Gateway(config-line)# ^Z
Gateway# copy startup-config running-config
%% Non-volatile configuration memory invalid or not present
Gateway#
```

- A. Enter the correct command.
- B. Enter the command at the correct prompt.

- C. Upgrade the amount of flash memory in the router.
- D. Erase NVRAM to make room for the configuration file.
- E. Add NVRAM because there is not enough room for the configuration file.

Correct Answer: A

QUESTION 3


Which option allows an EtherNet/IP I/O device to be safely installed where it is subject to water immersion?

- A. The device is rated IP20 and the power wiring is installed securely to the terminal block.
- B. The device is rated IP67 and a power cordset is used.
- C. The device is rated IP67 and immersed to 10 m.
- D. The device is rated IP20 and immersed to 10 m.

Correct Answer: B

QUESTION 4

Exhibit: Refer to the exhibit. CCNA.com has the industrial network shown in the exhibit. All switches are configured as layer 2 switches and are using VLAN 1 as their management VLAN. Each VLAN 1 interface has been assigned the correct IP address. What is the purpose of assigning a default gateway to SW-C switch?

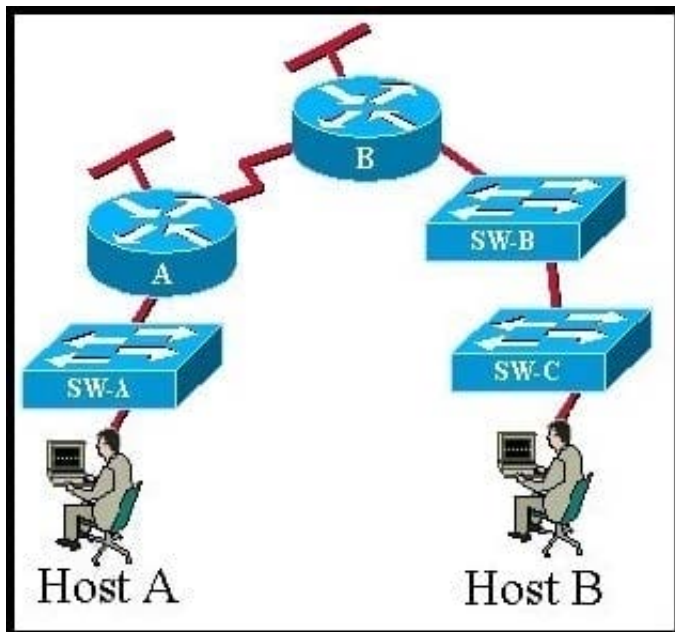

- A. allows connectivity between the VLAN 1 interface on SW-C and other devices in the network.
- B. allows connectivity between Host A and other devices in the network.

C. allows connectivity between Host B and other devices in the network.

D. allows the switch to pass traffic between Host A and Host B

Correct Answer: A

QUESTION 5

What is a characteristic of cables that are used in articulating equipment arms?

A. fiber-optic zip-cord construction

B. shielded copper twisted pair

C. high flex rated cable

D. type PLTC cable

Correct Answer: C

[Latest 200-401 Dumps](#)

[200-401 Study Guide](#)

[200-401 Exam Questions](#)