

## 2V0-642<sup>Q&As</sup>

VMware Certified Professional 6 - Network Virtualization 6.2 Exam

### Pass VMware 2V0-642 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/2v0-642.html>

100% Passing Guarantee  
100% Money Back Assurance


Following Questions and Answers are all new published by VMware  
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

When designing a multi-site NSX deployment, which capability requires Enhanced Linked Mode to function?

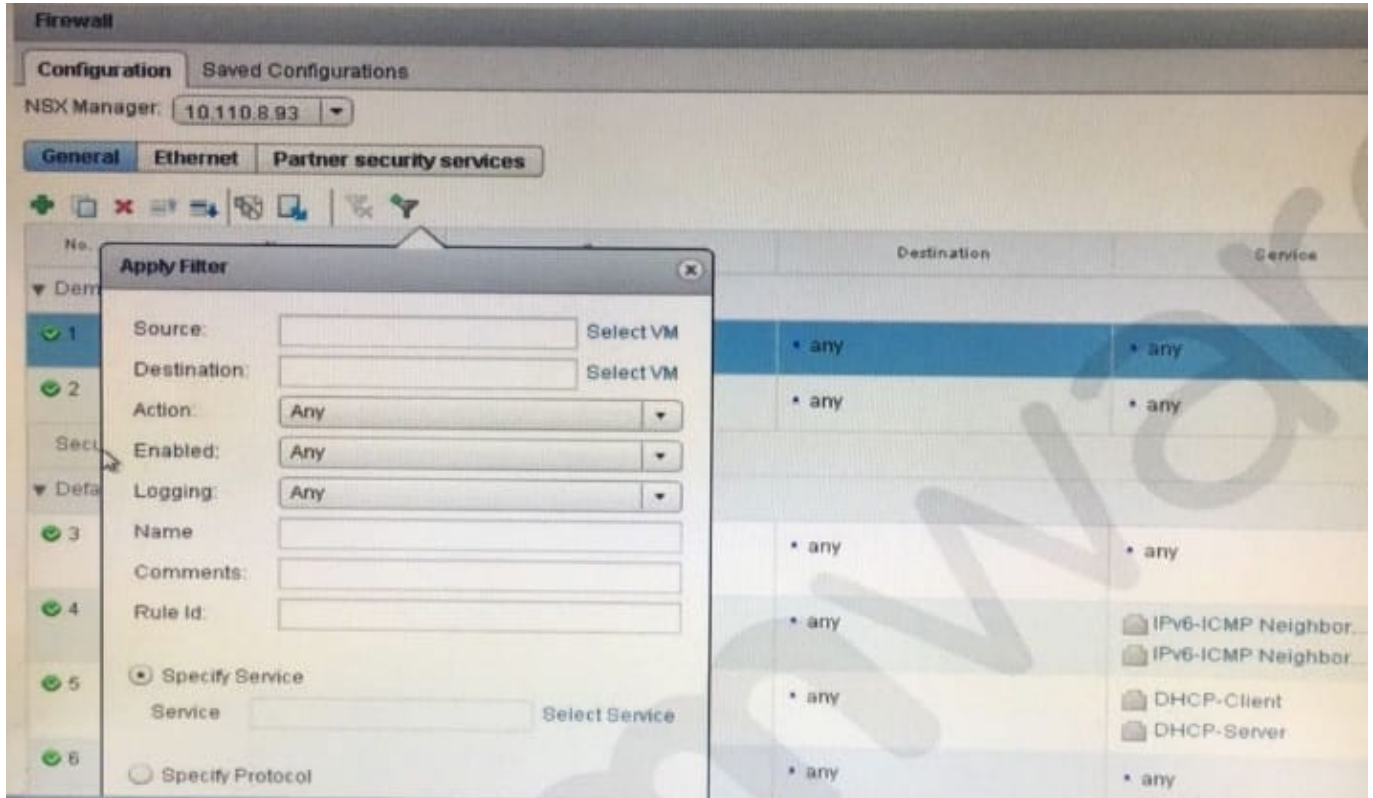

- A. Creating Universal Transport Zones
- B. Creating Universal Logical Switches
- C. Cross-vCenter vMotion
- D. Registering a Secondary NSX Manager

Correct Answer: C

**QUESTION 2**

When creating a new security policy how is the default weight determined?

- A. The default weight is equal to the highest defined weight minus 1000.
- B. The default weight is equal to the highest defined weight plus 1000.
- C. The default weight is equal to the highest defined weight.
- D. The default weight is incremented by 100, starting at 0.

Correct Answer: B

## QUESTION 3

Which two options are correct regarding vSphere Distributed Switches? (Choose two.)

- A. A single vDS can span multiple vCenter Servers.
- B. A single host can be attached to multiple vDS.
- C. A single vDS can span multiple hosts across multiple clusters.
- D. A vDS is automatically created when a new 802.1Q trunk is configured.

Correct Answer: BC

---

## QUESTION 4

An administrator has been asked to provide single failure redundancy. What is the minimum supported number of NSX Controllers needed to meet this requirements?

- A. 2
- B. 3
- C. 1
- D. 5

Correct Answer: B

---

## QUESTION 5

Which three changes to a distributed switch configuration could trigger a rollback? (Choose three.)

- A. Blocking all ports in the distributed port group containing the management VMkernel network adapter.
- B. Configure the virtual machine system traffic to enable bandwidth allocation using Network I/O Control.
- C. Adding a new host with a previous vDS configuration.
- D. Changing the MTU.
- E. Changing the VLAN settings in the distributed port group of the management VMkernel adapter.

Correct Answer: ADE

[Latest 2V0-642 Dumps](#)

[2V0-642 PDF Dumps](#)

[2V0-642 Braindumps](#)