VCE & PDF
Lead4Pass.com

300-165^{Q&As}

300-165 Q&As

Implementing Cisco Data Center Infrastructure

Pass Cisco 300-165 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.lead4pass.com/300-165.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

Instant Download After Purchase
100% Money Back Guarantee
365 Days Free Update
800,000+ Satisfied Customers

QUESTION 1

Which two features are required to implement a Layer 3 VXLAN gateway on the Cisco Nexus 5600 Series platform? (Choose two.)

A. feature mpls

B. feature nv overlay

C. feature lldp

D. feature eigrp

E. feature vn-segment-vlan-based

Correct Answer: BE

Reference: http://www.cisco.com/c/en/us/td/docs/routers/asr9000/software/asr9k_r5-3/lxvpn/configuration/guide/b-l3vpn-cg53xasr9k/b-l3vpn-cg53xasr9k_chapter_0111.pdf
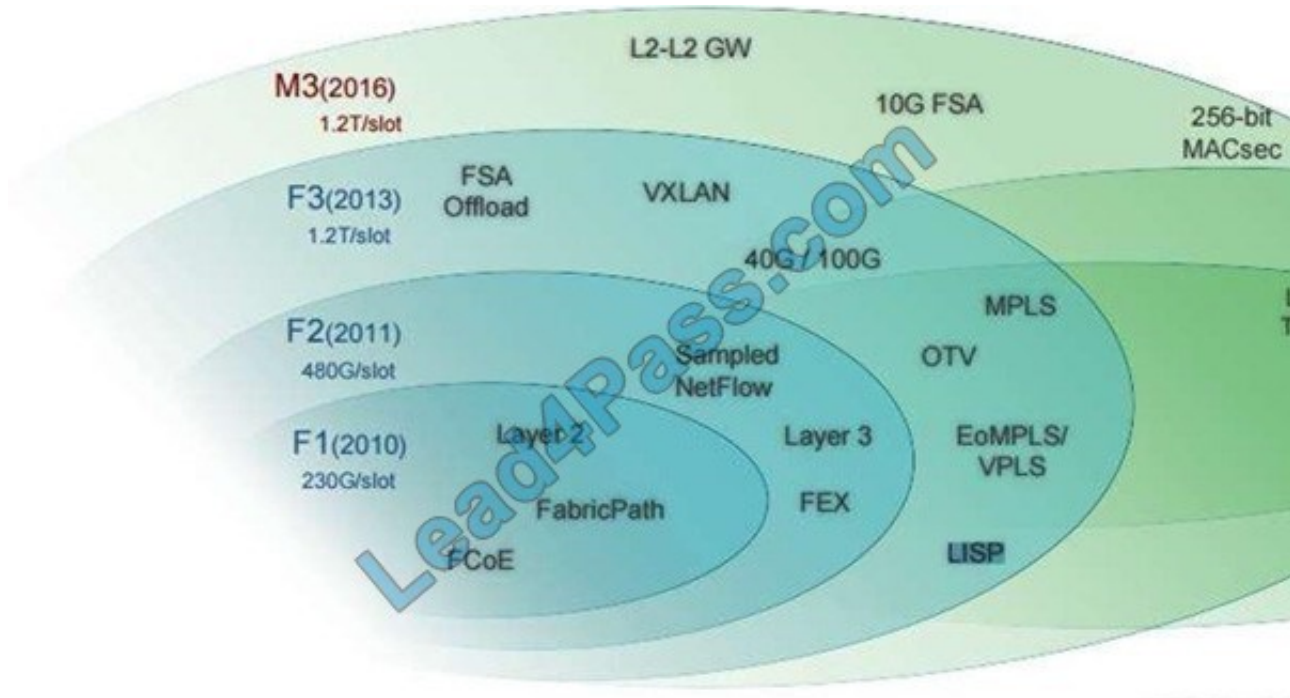
QUESTION 2

Which two Nexus family linecards allow the configuration of features regarding LISP, OTV and MPLS? (Choose two.)

A. B1

B. F3

C. F2

D. F1

E. M2

Correct Answer: BC

https://www.cisco.com/c/dam/global/da_dk/assets/training/seminaria-materials/CiscoVirtualUpdate-Nexus7000and7700.pdf

---

QUESTION 3

Switch(config)# login block-for 60 attempts 10 within 180 Switch(config)# login quiet-mode access-class acl

Refer to the exhibit. Which statement is true about the impact to login requests on a Cisco NX-OS switch that uses this configuration?

A. Hosts in the ACL are denied after 10 failed login attempts occur within 180 seconds.

B. Hosts outside the ACL are allowed if more than 10 failed login attempts occur.

C. Hosts in the ACL are allowed after 10 failed login attempts occur within 180 seconds.

D. All hosts are denied if 10 failed login attempts from hosts in the ACL occur in 180 seconds.

Correct Answer: C

The "login quiet-mode access-class acl "command can help authorized users to log into device in case of system login block-for function. Then users from the acl localization can log into the cisco device even when others cannot.

QUESTION 4

Which protocol is used to exchange MAC address reachability between OTV-enabled switches?

A. EIGRP

B. IS-IS

C. iBGP

D. RIPv2

Correct Answer: B

Reference: http://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/overlay-transport-virtualization-otv/white_paper_c11-702185.htmld

---

QUESTION 5

```
Switch_1(config) # feature lisp
Switch_1(config) # ip lisp itr
Switch_1(config) # ip lisp etr
Switch_1(config) # ip lisp itr map-resolver 10.10.10.1
Switch_1(config)# ip lisp database-mapping 10.10.10.0/24 172.16.1.1 priority 1 weight 100
```

Refer to the exhibit. What do you configure to complete the LISP setup on Switch_1?

A. locator address of the LISP map server

B. source address of the LISP map request messages

C. map-cache entry limit of the LISP

D. MTU discovery settings of the LISP router

Correct Answer: B

To Read the Whole Q&As, please purchase the Complete Version from Our website.
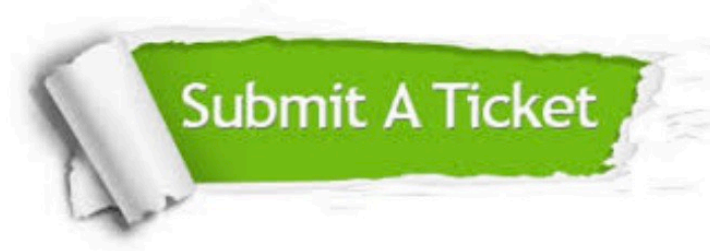
Try our product !

100% Guaranteed Success
100% Money Back Guarantee
365 Days Free Update
Instant Download After Purchase
24x7 Customer Support
Average 99.9% Success Rate
More than 800,000 Satisfied Customers Worldwide
Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications.
You can view Vendor list of All Certification Exams offered:

https://www.lead4pass.com/allproducts

Need Help

Please provide as much detail as possible so we can best assist you.
To update a previously submitted ticket: