# 300-175 Q&As

Cisco Data Center Unified Computing

## Pass Cisco 300-175 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

**https://www.lead4pass.com/300-175.html**

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco Official Exam Center

- **Instant Download** After Purchase
- **100% Money Back** Guarantee
- **365 Days** Free Update
- **800,000+** Satisfied Customers

**QUESTION 1**

Which protocol is not supported for Cisco UCS backups and imports?

A. FTP

B. TFTP

C. SCP

D. SFTP

E. HTTP

Correct Answer: E

**QUESTION 2**

Which ports can access the Cisco IMC if you select Shared LOM NIC mode in the Cisco IMC Configuration Utility for a Cisco UCS C-Series server?

A. the ports on an installed Cisco network adapter card

B. the two 1-Gb Ethernet ports

C. the two 10/100 management ports

D. the two 10/100 management ports, but each port has a default setting

Correct Answer: B

**QUESTION 3**

Which two prerequisites are required to configure a SAN boot from the iSCSI storage of a Cisco UCS system? (Choose two.)

A. There must be FCIP connectivity between the Cisco UCS domain and the boot target storage.

B. There must be IP connectivity between the Cisco UCS domain and the boot target storage.

C. The operating system to boot must be iBFT-capabie.

D. There must be a group of IP addresses that is associated with the WWN pool.

E. The operating system to boot must be an iSCSI initiator and must be target-capable.

Correct Answer: BC

https://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/sw/gui/config/guide/2-0/b_UCSM_GUI_Configuration_Guide_2_0/

b_UCSM_GUI_Configuration_Guide_2_0_chapter_011101.html#concept_FBB613095A774844ACA4DD7377EE102D

To use a SAN boot, ensure that the following is configured: The Cisco UCS domain must be able to communicate with the SAN storage device that hosts the operating system image.

The next step, which is the installation of the operating system (OS), requires an OS that is iBFT capable.

There must be FCIP connectivity between the Cisco UCS domain and the boot target storage. NOT CORRECT (FCIP IS FC)

There must be IP connectivity between the Cisco UCS domain and the boot target storage. CORRECT

The operating system to boot must be iBFT-capable. CORRECT

There must be a group of IP addresses that is associated with the WWN pool. NOT CORRECT (WWN IS FC)

The operating system to boot must be an iSCSI initiator and must be target-capable. MAYBE

**QUESTION 4**

Which component is unsupported by the UEFi boot device in the Cisco UCS C-series standalone?

A. PCI SSD

B. FCoE

C. FlexFlash card

D. USB

Correct Answer: A

**QUESTION 5**

Which two of the listed BIOS options are required for VM-FEX in high performance mode? (Choose two.)

A. RSS

B. interrupt coherency

C. virtualization technology

D. cache validation

E. ATS support

Correct Answer: CE

300-175 PDF Dumps 300-175 VCE Dumps 300-175 Exam Questions

To Read the Whole Q&As, please purchase the Complete Version from Our website.

# Try our product !

100% Guaranteed Success
100% Money Back Guarantee
365 Days Free Update
Instant Download After Purchase
24x7 Customer Support
Average 99.9% Success Rate
More than 800,000 Satisfied Customers Worldwide
Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications.
You can view Vendor list of All Certification Exams offered:

https://www.lead4pass.com/allproducts

## Need Help

Please provide as much detail as possible so we can best assist you.
To update a previously submitted ticket:

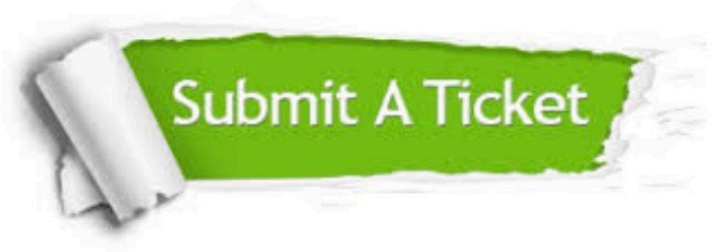

Any charges made through this site will appear as Global Simulators Limited.
All trademarks are the property of their respective owners.
Copyright © lead4pass, All Rights Reserved.