

300-430^{Q&As}

Implementing Cisco Enterprise Wireless Networks (ENWLSI)

Pass Cisco 300-430 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/300-430.html>

100% Passing Guarantee
100% Money Back Assurance


Following Questions and Answers are all new published by Cisco
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

Refer to the exhibit.

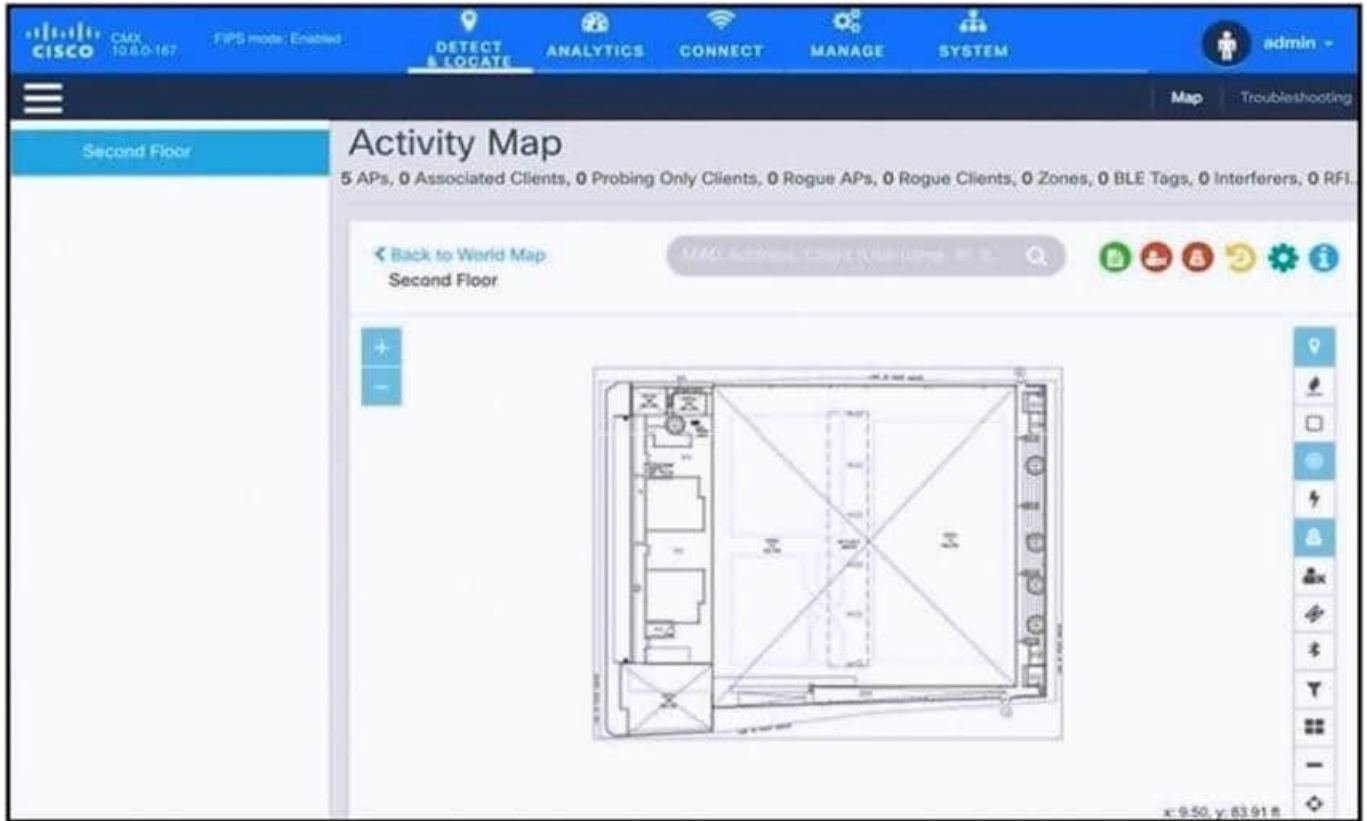

An engineer has deployed the Cisco CMX solution to track and detect the number of users who visit the office each day. The CMX dashboard is not showing any data. Which action resolves this issue?

- A. Configure Single Sign-On authentication.
- B. Add the WLCs to CMX.
- C. Copy the exported Maps from CMX server to PI using SCP.
- D. Install an evaluation license to CMX server.

Correct Answer: B

https://www.cisco.com/c/en/us/td/docs/wireless/mse/10-4/cm_x_config/b_cg_cm_x104/the_cisco_cm_x_detect_and_locate_service.html#:~:text=Wireless%20Controllers,-,Add%20controllers,-%E2%80%94For%20information%20about

QUESTION 2

Which two events are outcomes of a successful RF jamming attack? (Choose two.)

- A. disruption of WLAN services


- B. unauthentication association
- C. deauthentication broadcast
- D. deauthentication multicast
- E. physical damage to AP hardware

Correct Answer: AE

https://www.cisco.com/c/en/us/td/docs/wireless/mse/3350/72/wIPS_Configuration/Guide/wIPS_7_2/msecg_appA_wIPS.html#wp1345929

QUESTION 3

Refer to the exhibit.

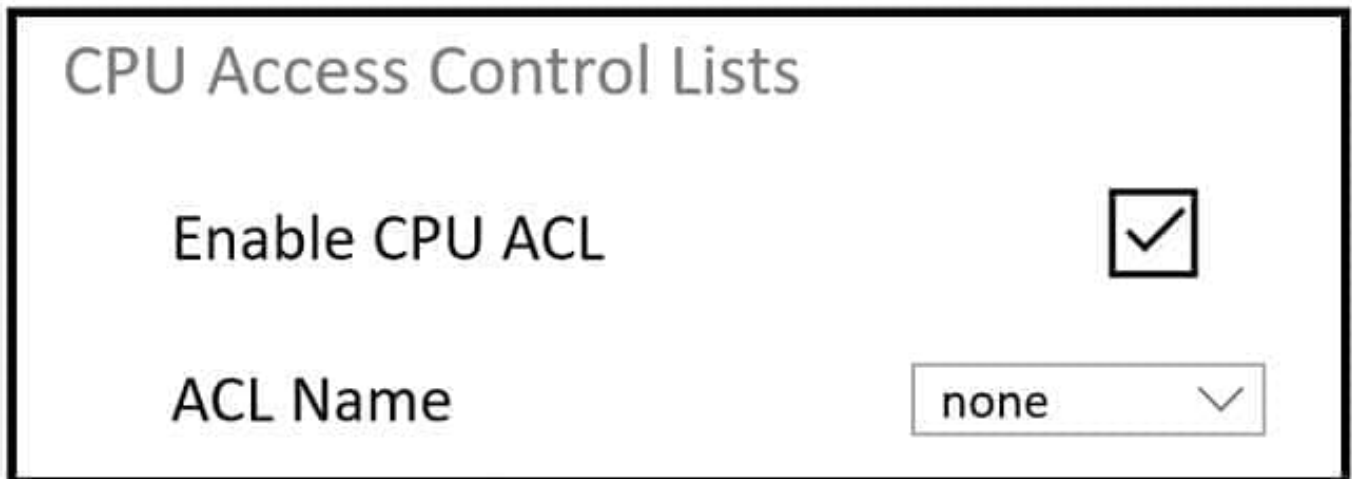

An engineer must restrict some subnets to have access to the WLC. When the CPU ACL function is enabled, no ACLs in the drop-down list are seen. What is the cause of the problem?

- A. The ACL does not have a rule that is specified to the Management interface.
- B. No ACLs have been created under the Access Control List tab.
- C. When the ACL is created, it must be specified that it is a CPU ACL.
- D. This configuration must be performed through the CLI and not through the web GUI.

Correct Answer: B

QUESTION 4

What is configured to use more than one port on the OEAP to extend the wired network's?

- A. AAA override
- B. client load balancing
- C. remote LAN ACL
- D. remote LAN

Correct Answer: D

QUESTION 5

A network engineer is implementing a wireless network and is considering deploying a single SSID for device onboarding. Which option is a benefit of using dual SSIDs with a captive portal on the onboard SSID compared to a single SSID solution?

- A. limit of a single device per user
- B. restrict allowed devices types
- C. allow multiple devices per user
- D. minimize client configuration errors

Correct Answer: B

<https://community.cisco.com/t5/security-documents/ise-byod-dual-vs-single-ssid-onboarding/ta-p/3641422>

[Latest 300-430 Dumps](#)

[300-430 PDF Dumps](#)

[300-430 Exam Questions](#)