

300-625^{Q&As}

Implementing Cisco Storage Area Networking (DCSAN)

Pass Cisco 300-625 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/300-625.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

- ⚙ **Instant Download** After Purchase
- ⚙ **100% Money Back** Guarantee
- ⚙ **365 Days** Free Update
- ⚙ **800,000+** Satisfied Customers



QUESTION 1

A storage engineer is troubleshooting a Cisco MDS switch upgrade issue. What prevents the completion of a non-disruptive upgrade?

- A. The Fibre Channel host initiator is connected.
- B. The Fibre Channel storage target is connected.
- C. The Cisco Fabric Services operation in progress.
- D. The Fibre Channel and FCoE storage targets are connected.

Correct Answer: B

Reference: https://www.cisco.com/en/US/docs/storage/san_switches/mds9000/sw/rel_3_x/release/notes/14116.16.html

QUESTION 2

Refer to the exhibit.

```
switch-1 (config)# zoneset name Zone-B vsan 100
Zoning database update is progress, command rejected
```


Which command is used to determine which switch has the lock?

- A. show fcs ie vsan
- B. show zoneset active
- C. show zone status
- D. show flogi database

Correct Answer: C

QUESTION 3

Refer to the exhibit.

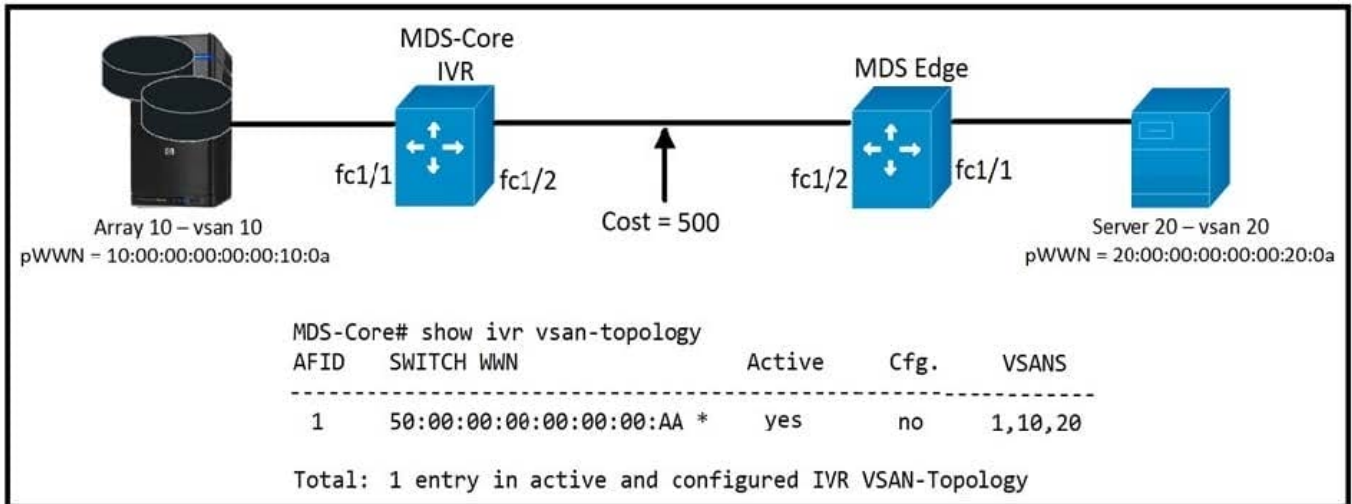

An engineer is configuring Inter-VSAN routing for two Cisco MDS switches. The FSPF cost between the switches is 500, and the Cisco MDS core virtualizes an IVR NAT domain as shown. Which statement about the topology is correct?

- A. The MDS-Core simulates an IVR NAT, and the FSPF cost is 500.
- B. The MDS-Core simulates an IVR NAT, and increases the cost to 501.
- C. The MDS-Core simulates an IVR NAT, and decreases the cost to 400.
- D. The MDS-Core simulates an IVR NAT, and increases the cost to 600.

Correct Answer: B

QUESTION 4

What is the function of the 0xFFFFFC address in a Fibre Channel fabric?

- A. management server
- B. fabric controller
- C. name server
- D. time server

Correct Answer: C

QUESTION 5

Which configuration is always required when running the setup utility on a Cisco MDS 9000 Series Switch?

- A. administrator password
- B. management IP address

C. active NTP server

D. active default gateway

Correct Answer: A

[300-625 Study Guide](#)

[300-625 Exam Questions](#)

[300-625 Braindumps](#)