

350-029^{Q&As}

CCIE Service Provider written

Pass Cisco 350-029 Exam with 100% Guarantee

Free Download Real Questions & Answers PDF and VCE file from:

https://www.lead4pass.com/350-029.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

- Instant Download After Purchase
- 100% Money Back Guarantee
- 365 Days Free Update
- 800,000+ Satisfied Customers




https://www.lead4pass.com/350-029.html

QUESTION 1

Select and Place:

Etipe	1
Outer VLAN tag	2
FCS	3
Destination Address	4
Data	5
Inner VLAN tag	6
Source Address	7

Correct Answer:

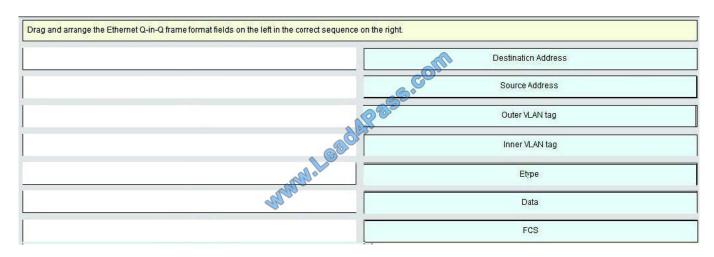

QUESTION 2

A network engineer is implementing an MPLS network among devices from different vendors. The devices must be configured with MPLS VPN service and MPLS TE. Based on options provided, which three protocols fulfill all of these requirements? (Choose three.)

- A. RSVP
- B. LDP
- C. TDP
- D. EIGRP
- E. IGRP



https://www.lead4pass.com/350-029.html

2021 Latest lead4pass 350-029 PDF and VCE dumps Download

F. BGP

G. RIP

Correct Answer: ABF

QUESTION 3

Which two statements are correct?

- A. A VC type 5 transports a VLAN over MPLS.
- B. A VC type 4 tunnels an Ethernet port over MPLS.
- C. A VC type 5 tunnels an Ethernet port over MPLS.
- D. A VC type 4 transports a VLAN over MPLS.

Correct Answer: CD

VC Type 4 is used for Ethernet VLAN mode. VC Type 5 is used for Ethernet Port mode.

QUESTION 4

Which three statements about the BGP next-hop attribute are true? (Choose three.)

- A. EBGP sessions between confederation sub ASs do not modify the next-hop attribute.
- B. By default, iBGP sessions change the next-hop attribute learned from eBGP peers to self address.
- C. By default, the next-hop attribute is not changed when a prefix is reflected by the route reflector
- D. EBGP sessions between confederation sub ASs change the next-hop attribute to peer address.
- E. By default, iBGP sessions preserve the next-hop attribute learned from eBGP peers.

Correct Answer: ACE

QUESTION 5

A service provider engineer has been requested to preserve QoS values when customer packets cross the MPLS backbone. Which Cisco IOS command should the engineer apply and what should the label value be when the LSR at the penultimate hop forwards the MPLS label packets toward the egress PE?

A. mpls ldp explicit-null with label value of zero

- B. mpls ldp implicit-null with label value of zero
- C. mpls ldp explicit-null with label value of three
- D. mpls ldp implicit-null with label value of three



https://www.lead4pass.com/350-029.html 2021 Latest lead4pass 350-029 PDF and VCE dumps Download

Correct Answer: A

350-029 PDF Dumps

350-029 VCE Dumps

350-029 Study Guide



To Read the Whole Q&As, please purchase the Complete Version from Our website.

Try our product!

100% Guaranteed Success

100% Money Back Guarantee

365 Days Free Update

Instant Download After Purchase

24x7 Customer Support

Average 99.9% Success Rate

More than 800,000 Satisfied Customers Worldwide

Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications. You can view Vendor list of All Certification Exams offered:

https://www.lead4pass.com/allproducts

Need Help

Please provide as much detail as possible so we can best assist you. To update a previously submitted ticket:





Any charges made through this site will appear as Global Simulators Limited.

All trademarks are the property of their respective owners.

Copyright © lead4pass, All Rights Reserved.