

351-080^{Q&As}

CCIE Data Center Written

Pass Cisco 351-080 Exam with 100% Guarantee

Free Download Real Questions & Answers PDF and VCE file from:

https://www.lead4pass.com/351-080.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

- Instant Download After Purchase
- 100% Money Back Guarantee
- 365 Days Free Update
- 800,000+ Satisfied Customers



QUESTION 1

Which statement about ESS SW_ILS frames is true?

- A. ESS SW_ILS frames are addressed from the management server of a requesting switch to the Management Server of a responding switch.
- B. ESS SW_ILS frames are addressed from the name server of a requesting switch to the Name Server of a responding switch.
- C. ESS SW_ILS frames are addressed from the domain controller of a requesting switch to the Domain Controller of a responding switch.
- D. ESS SW_ILS frames are addressed from the alias server of a requesting switch to the Alias Server of a responding switch.
- E. ESS SW_ILS frames are addressed from the time server of a requesting switch to the Time Server of a responding switch.

Correct Answer: C

QUESTION 2

Refer to the exhibit.



Which two reasons explain why vPC peer-switch is not working? (Choose two.)

- A. The feature is not enabled on the vPC peer.
- B. The peer keepalive link is down.
- C. Cisco Discovery Protocol is not configured.
- D. vPC peers are not the root of spanning tree topology.

https://www.lead4pass.com/351-080.html

2021 Latest lead4pass 351-080 PDF and VCE dumps Download

E. LoopGuard is disabled.

Correct Answer: AD

QUESTION 3

Where is Cisco UCS vNICs created?

A. In the blade BIOS

B. In the operating system

C. In the service profile

D. In the card option ROM

Correct Answer: C

QUESTION 4

Enabling jumbo frame support on a Cisco Nexus 5500 Switch can be done through which method?

- A. Changing the default policy map from a default MTU of 1500 to 9216
- B. Using the command system jumbomtu 9216
- C. Using the command interface MTU 9216
- D. Configuring the default Ethernet system class to an MTU of 9216 with a new network QoS policy map


Correct Answer: D

QUESTION 5

Refer to the exhibit.

https://www.lead4pass.com/351-080.html

2021 Latest lead4pass 351-080 PDF and VCE dumps Download

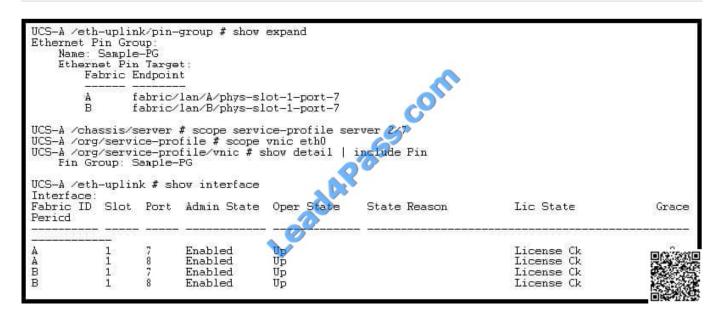

Assume that there is no disjoint Layer 2 configuration. Based on the output, what will happen if uplink eth1/7 on FI-A fails?

- A. The host will lose Ethernet uplink connectivity on FI-A.
- B. Fabric failover will force the vNIC that is bound to FI-A to use uplink eth1/7 on FI-B.
- C. Cisco UCS Manager will disable the host vNIC that is connected to FI-A.
- D. Traffic from any hosts using this pin group will use e1/8 on FI-A.

Correct Answer: D

Latest 351-080 Dumps

351-080 Exam Questions

351-080 Braindumps

To Read the Whole Q&As, please purchase the Complete Version from Our website.

Try our product!

100% Guaranteed Success

100% Money Back Guarantee

365 Days Free Update

Instant Download After Purchase

24x7 Customer Support

Average 99.9% Success Rate

More than 800,000 Satisfied Customers Worldwide

Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications. You can view Vendor list of All Certification Exams offered:

https://www.lead4pass.com/allproducts

Need Help

Please provide as much detail as possible so we can best assist you. To update a previously submitted ticket:





Any charges made through this site will appear as Global Simulators Limited.

All trademarks are the property of their respective owners.

Copyright © lead4pass, All Rights Reserved.