

4A0-103^{Q&As}

Alcatel-Lucent Multiprotocol Label Switching

Pass Alcatel-Lucent 4A0-103 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.lead4pass.com/4a0-103.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Alcatel-Lucent Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1


Which of the following describes 6PE?

- A. P routers run IPv4 only. PE routers run IPv4 only and exchange IPv6 routes using MP-BGP.
- B. P routers run IPv4 only. PE routers run both IPv4 and IPv6 and exchange IPv6 routes using MP-BGP.
- C. P routers run IPv6 only. PE routers run both IPv4 and IPv6 and exchange IPv4 routes using MP-BGP.
- D. P routers run IPv6 only. PE routers run IPv6 only and exchange IPv4 routes using MP-BGP.

Correct Answer: B

QUESTION 2

Click on the exhibit.

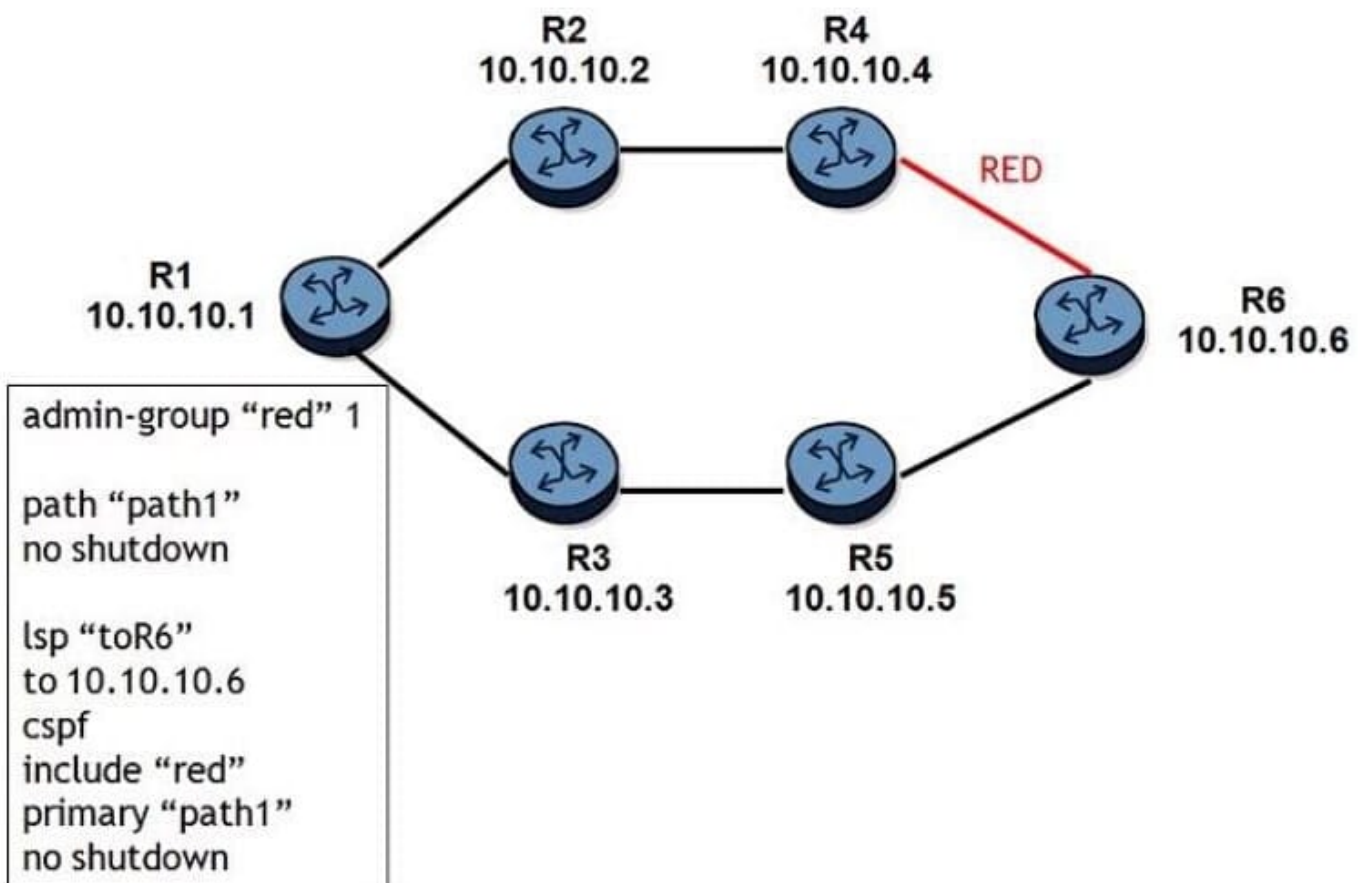

The link between routers R4 and R6 are configured with an admin group "red". What happens when the LSP is first signaled?

- A. The LSP will go through the path R1-R2-R4-R6.

- B. The LSP will go through the path R1-R3-R5-R6.
- C. The LSP is down because router R1 detects that no path can meet its constraints.
- D. The LSP is down because router R4 detects that no path can meet its constraints.

Correct Answer: C

QUESTION 3

Click on the exhibit.

```
*A:SRC_R2# show router rsvp session
```

```
=====
```

```
RSVP Sessions
```

```
=====
```

From	To	Tunnel ID	LSP ID	Name	State
10.10.10.3	10.2.4.4	61440	2	bypass-link10.3.4.4	Up
10.10.10.1	10.2.4.4	61440	2	bypass-node10.10.10.3	Up

```
=====
```

```
Sessions : 2
```

```
=====
```

Which of the following about the bypass tunnel is FALSE?

- A. The router 10.10.10.1 is a PLR providing node protection for the router 10.10.10.3.
- B. One-to-one fast reroute protection is requested by an LSP.
- C. The bypass-link tunnel is used to avoid the link with the egress interface address 10.3.4.4.
- D. The bypass-node tunnel is used to avoid the next-hop downstream router 10.10.10.3.

Correct Answer: B

QUESTION 4

Which of the following about configuring an LSP path definition on an Alcatel-Lucent 7750 SR is FALSE?

- A. A path definition can have both loose and strict hops.
- B. A path definition can be configured with loose hops only.
- C. A path definition is configured on the head-end router only,
- D. A path definition is not required if CSPF is enabled on an LSP.

Correct Answer: D

QUESTION 5

What is the purpose of a T-LDP session?

- A. It allows link LDP to be configured on the edge devices only.
- B. It is used to signal the transport labels in the provider core.
- C. It allows selective control over which devices are configured for LDP.
- D. It is used to signal the service labels in the provider core.

Correct Answer: D

[Latest 4A0-103 Dumps](#)

[4A0-103 VCE Dumps](#)

[4A0-103 Braindumps](#)