

4A0-C01^{Q&As}

Nokia NRS II Composite Exam

Pass Nokia 4A0-C01 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/4a0-c01.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Nokia
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

When a router receives an IP packet, but does not find a match in the routing table for the destination IP address, what actions are performed by the router?

- A. The packet is flooded out all router interfaces.
- B. The packet is dropped and an ICMP unreachable message is sent back to the source.
- C. The packet is silently discarded.
- D. The packet is flooded out all interfaces and an ICMP unreachable message is sent.

Correct Answer: B

QUESTION 2

Which of the following about Alcatel-Lucent 7750 SR command "oam lsp-trace prefix" is FALSE?

- A. The router performs a unidirectional LSP test.
- B. The router collects hop information along the tunnel's path.
- C. The router uses MPLS Echo Request packets that are IP-routed,
- D. The MPLS TTL values are incremented at each request.

Correct Answer: C

QUESTION 3


Which of the following about SDPs is FALSE?

- A. An SDP is not required for a local service.
- B. A single SDP can carry different types of services.
- C. An SDP can simultaneously support GRE and MPLS encapsulation.
- D. An SDP can use the system IP address to indicate the far-end router.

Correct Answer: C

QUESTION 4

Click on the exhibit.

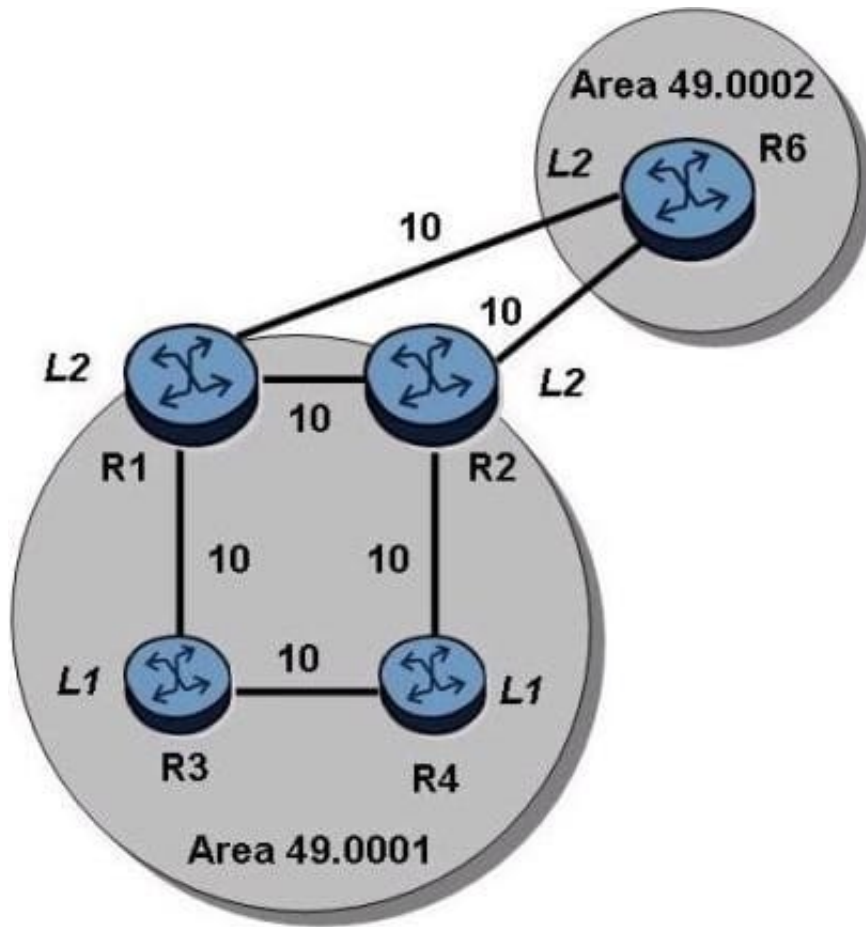

Examine the physical topology of the IS-IS network, the metrics of the links and the levels of the routers. All routers have a system address included in IS-IS.


Which of the following describes the route that router R4 will use to reach the system address of router R6?

- A. Router R4 will have a route to router R6's system address with router R2 as the next-hop.
- B. Router R4 will have a default route with router R2 as the next-hop.
- C. Router R4 will have a default route with router R3 as the next-hop.
- D. Router R4 will not have a route that can be used to reach the system address of router R6.

Correct Answer: D

QUESTION 5

Click on the exhibit.

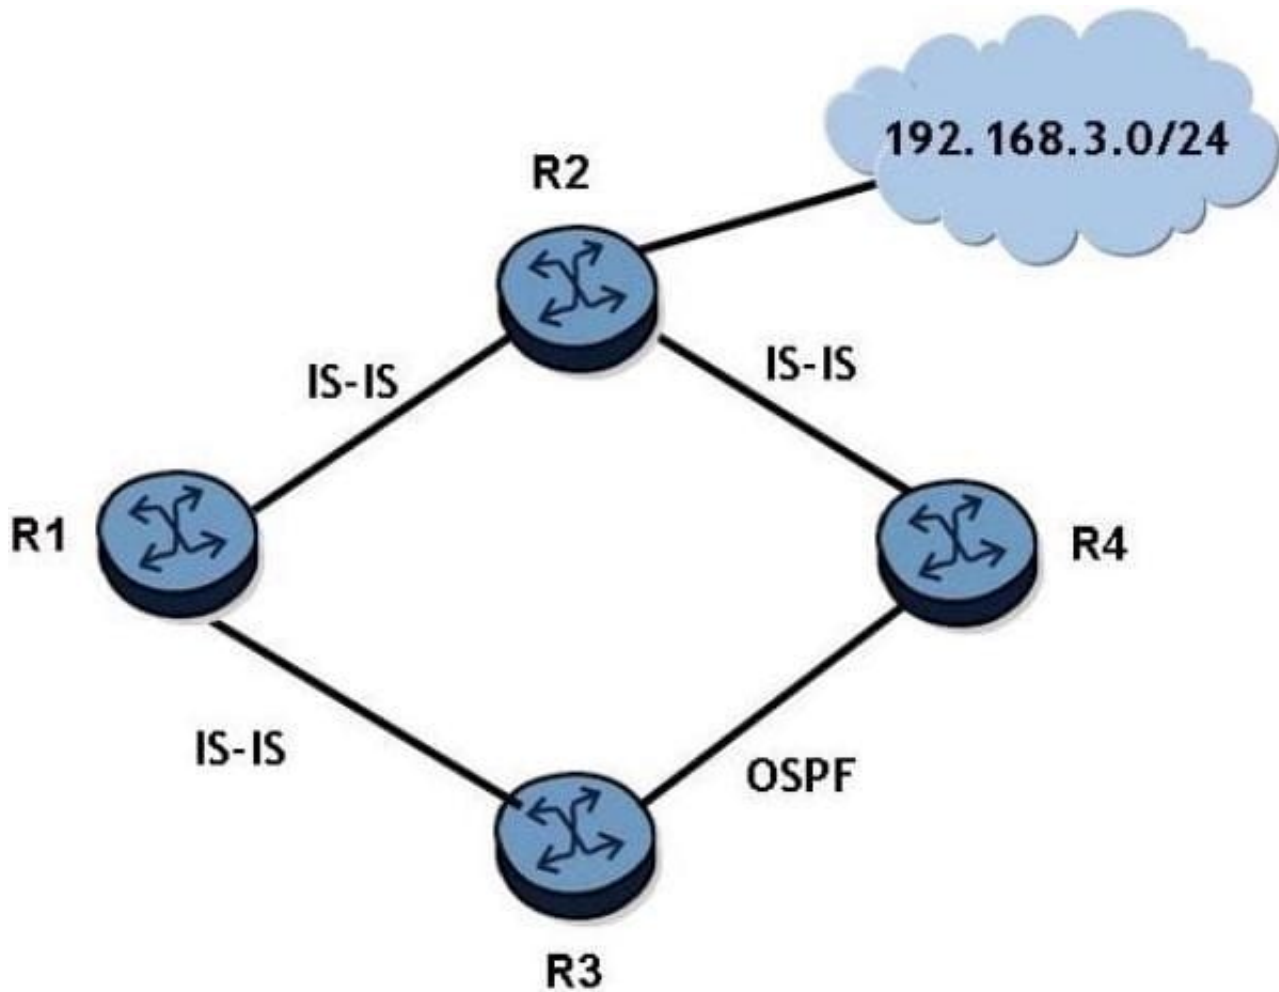

Router R2 has a directly connected interface to network 192.168.3.0/24 that is included in IS-IS.

If router R4 redistributes the IS-IS route to 192.168.3.0/24 into OSPF, router R3 will receive two routes to 192.168.3.0/24. Assume that all IS-IS routers are L1/L2 capable and are in the same area.

Which of the following is TRUE?

- A. Router R3 will install the IS-IS route in its routing table.
- B. Router R3 will install the OSPF route in its routing table.
- C. Router R3 will install an OSPF route and an IS-IS route in its route table.
- D. There is not enough information to answer the question.

Correct Answer: A

[4A0-C01 PDF Dumps](#)

[4A0-C01 VCE Dumps](#)

[4A0-C01 Practice Test](#)