

4A0-M03^{Q&As}

Nokia Mobility Manager

Pass Nokia 4A0-M03 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/4a0-m03.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Nokia
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

Which of the following messages are exchanged between the MME and the SGW during the UE-initiated detach procedure?

- A. Detach Request / Detach Accept
- B. Delete Session Request / Delete Session Response
- C. S1 Context Release / S1 Context Release Complete
- D. CC-Request / CC-Answer

Correct Answer: A

Reference: <https://www.slideshare.net/tharinduwije/lte-ue-initial-attach-detach-from-networkx>

QUESTION 2

Which of the following statements regarding IMEI checking is FALSE?

- A. MME requests IMEI from the UE.
- B. MME receives the IMEI status from the HSS given the UE's IMEI.
- C. The IMEI status can be whitelisted, blacklisted, or greylisted.
- D. MME decides whether to reject the Attach procedure from UE based on the IMEI status.

Correct Answer: B

QUESTION 3

Which of the following regarding logging architecture in Nokia CMM is FALSE?


- A. Log files can be retrieved under the "/data-logs" folder.
- B. Different log files are generated automatically in the system.
- C. Logs are generated based on log events.
- D. Details about each log can be displayed using the verbose (-v) flag.

Correct Answer: A

QUESTION 4

In this exhibit, a new SCTP profile is configured on the MME.

Which interface(s) in the given exhibit can be associated with this profile?

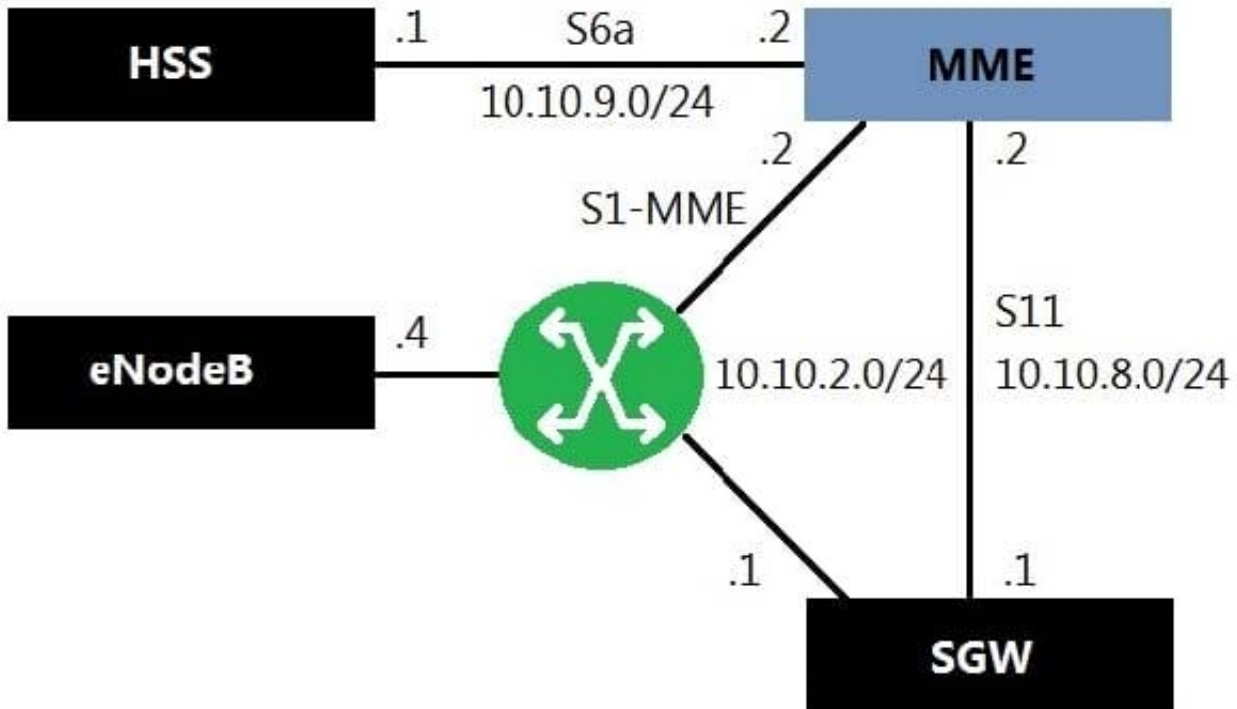

```
# cmm sctpProfile create -name sctp-profile -rtoMin 100 -rtoMax 500
```

- A. S1-MME only
- B. S11 only
- C. Both S1-MME and S6a
- D. Both S11 and S6a

Correct Answer: C

QUESTION 5

Which of the following statements regarding handover is FALSE?

- A. Handover can occur when UE is in ECM-CONNECTED state
- B. S1-based handover is used when X2-based handover attempt failed
- C. During X2-based handover, MME may remain the same or be relocated
- D. S1-based handover is used when there is no X2 interface between source and target eNodeBs

Correct Answer: C

[4A0-M03 PDF Dumps](#)

[4A0-M03 VCE Dumps](#)

[4A0-M03 Braindumps](#)