

## 500-220<sup>Q&As</sup>

Cisco Meraki Solutions Specialist

### Pass Cisco 500-220 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/500-220.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco  
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



## QUESTION 1

### Uplink selection

#### Global preferences

Primary uplink

WAN 1

Load balancing

- Enabled  
Traffic will be spread across both uplinks in the proportions specified above. Management traffic to the Meraki cloud will use the primary uplink.
- Disabled  
All Internet traffic will use the primary uplink unless overridden by an uplink preference or if the primary uplink fails.

Active-Active AutoVPN

- Enabled  
Create VPN tunnels over all of the available uplinks (primary and secondary).
- Disabled  
Do not create VPN tunnels over the secondary uplink unless the primary uplink fails.

#### Flow preferences

Internet traffic

There are no uplink preferences for Internet traffic configured on this network.

[Add a preference](#)

#### SD-WAN policies

VPN traffic

There are no uplink preferences for VPN traffic configured on this network.

[Add a preference](#)

Custom performance classes

Name	Maximum latency (ms)	Maximum jitter (ms)	Maximum loss (%)	Actions
VoIP	150	(none)	(none)	×

[Create a new custom performance class](#)

Refer to the exhibit. What does the MX Security Appliance send to determine whether VPN traffic exceeds the configured latency threshold in the VoIP custom performance class?

- A. 1000-byte TCP probes every second, through VPN tunnels that are established over the primary WAN link.
- B. 100-byte UDP probes every second, through VPN tunnels that are established over every WAN link.
- C. 100-byte UDP probes every second, through VPN tunnels that are established over the primary WAN link.
- D. 1000-byte TCP probes every second, through VPN tunnels that are established over every WAN link.

Correct Answer: C

## QUESTION 2

Which Cisco Meraki product must be deployed in addition to Systems Manager so that Systems Manager Sentry

enrollment can be used?

- A. MS Switch
- B. Meraki Insight
- C. MR Access Point
- D. MV Smart Camera

Correct Answer: C

Reference: <https://meraki.cisco.com/blog/tag/systems-manager/page/4/>

---

### QUESTION 3


A Cisco Meraki MV camera is monitoring an office and its field of vision currently captures work desks and employee computer screens. However, recording employee computer screens is prohibited by local regulation. Which feature in Dashboard can be used to preserve the current position of the camera while also meeting regulation requirements?

- A. zone exclusion
- B. privacy window
- C. area of interest
- D. sensor crop
- E. restricted mode

Correct Answer: B

---

### QUESTION 4

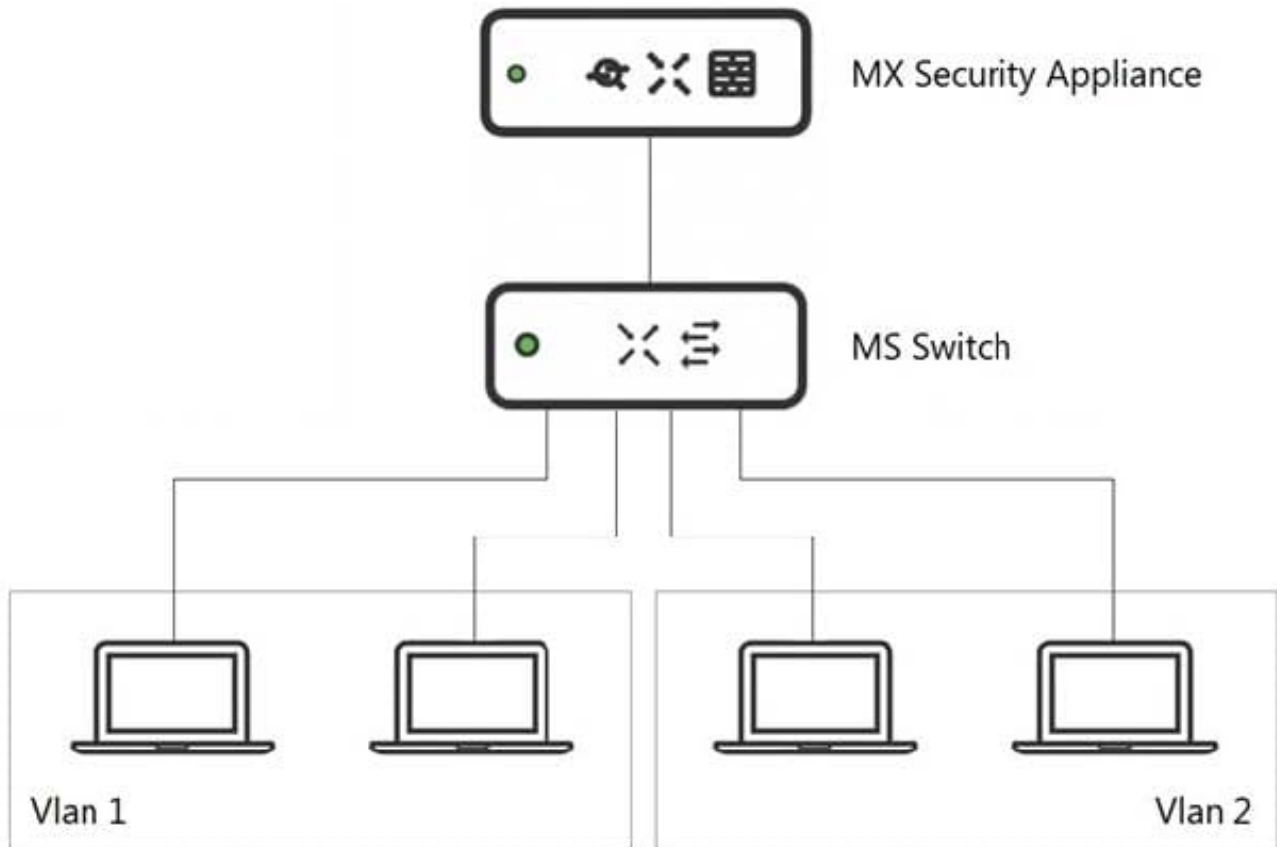

Refer to the exhibit. What is an advantage of implementing inter-VLAN routing on an MX Security Appliance rather than performing inter-VLAN routing on an MS Series Switch?

- A. The MX appliance performs IDS/IPS for inter-VLAN traffic.
- B. The MX appliance performs AMP for inter-VLAN traffic.
- C. The MX appliance performs data encryption for inter-VLAN traffic.
- D. The MX appliance performs content filtering for inter-VLAN traffic.

Correct Answer: A

**QUESTION 5**



Refer to the exhibit. For an AP that displays this alert, which network access control method must be in use?

- A. preshared key

- B. WPA2-enterprise with my RADIUS server
- C. splash page with my RADIUS server
- D. MAC-based access control with RADIUS server

Correct Answer: A

[Latest 500-220 Dumps](#)

[500-220 Practice Test](#)

[500-220 Study Guide](#)