

## 5V0-41.20<sup>Q&As</sup>

VMware SD-WAN Troubleshoot

### Pass VMware 5V0-41.20 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/5v0-41-20.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by VMware  
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers




**QUESTION 1**

Scenario 3:

After resolving numerous connectivity issues throughout the various branch sites, connectivity between applications and users is finally present. The network administrator is informed that during certain tests, applications are not performing as they are expected to. Users report that call quality has not fully improved and that some of their calls either drop or have poor voice quality where the conversation is breaking up. Other users are noticing that file transfers are slower than expect. A group of users from a few sites have reported slowness in accessing internal and external applications.

Exhibit.

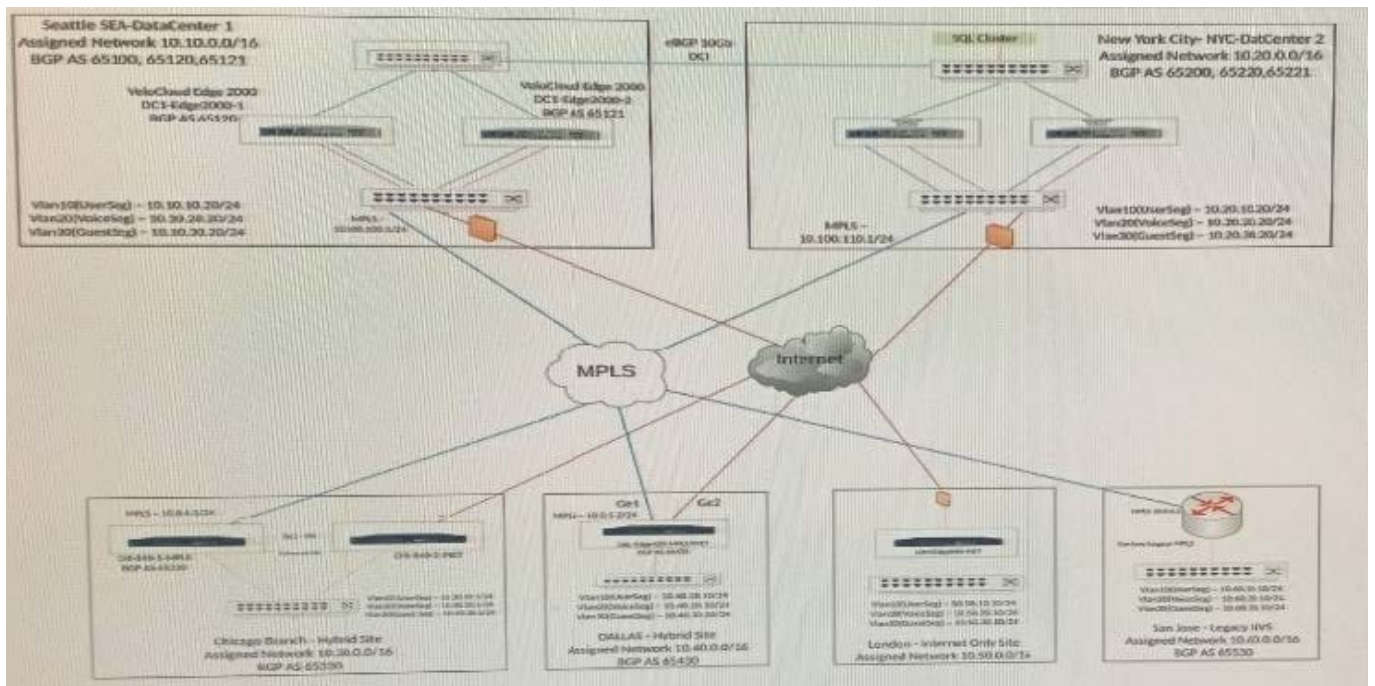

A network administrator wants to achieve better high-availability and network reconvergence between LAN-side BGP Networks and the hub Edges in New York.

What must the administrator do?

- A. Modify the Keep Alive and Hold timers to the lowest possible values ensuring the Hold timer is 3 times more than the Keep Alive timer.
- B. Nothing, the system will auto-rebalance connections and will provide sub-second convergence.
- C. Modify the Connect and Hold timers to the lowest possible values ensuring the Hold timer is 3 times more than the Connect timer.
- D. Modify the Keep Alive and Hold timers to the lowest possible values ensuring the Keep Alive timer is 3 times more than the Hold timer.


Correct Answer: B

QUESTION 2

Scenario 2:

After completing the branch activation activities for all required branches, the network administrator attempts to test connectivity between the various branches and between the hubs and branches. The administrator notices a lack of connectivity despite being certain that configurations have been complete. The administrator also observed that several users are reporting intermittent connectivity to some of the applications they are accessing. Other users are reporting no access to these applications. Other users at some of the branches claim they cannot get to certain public resources. The administrator wants to ensure that all sites can talk to each other and all resources are accessible.

Exhibit.

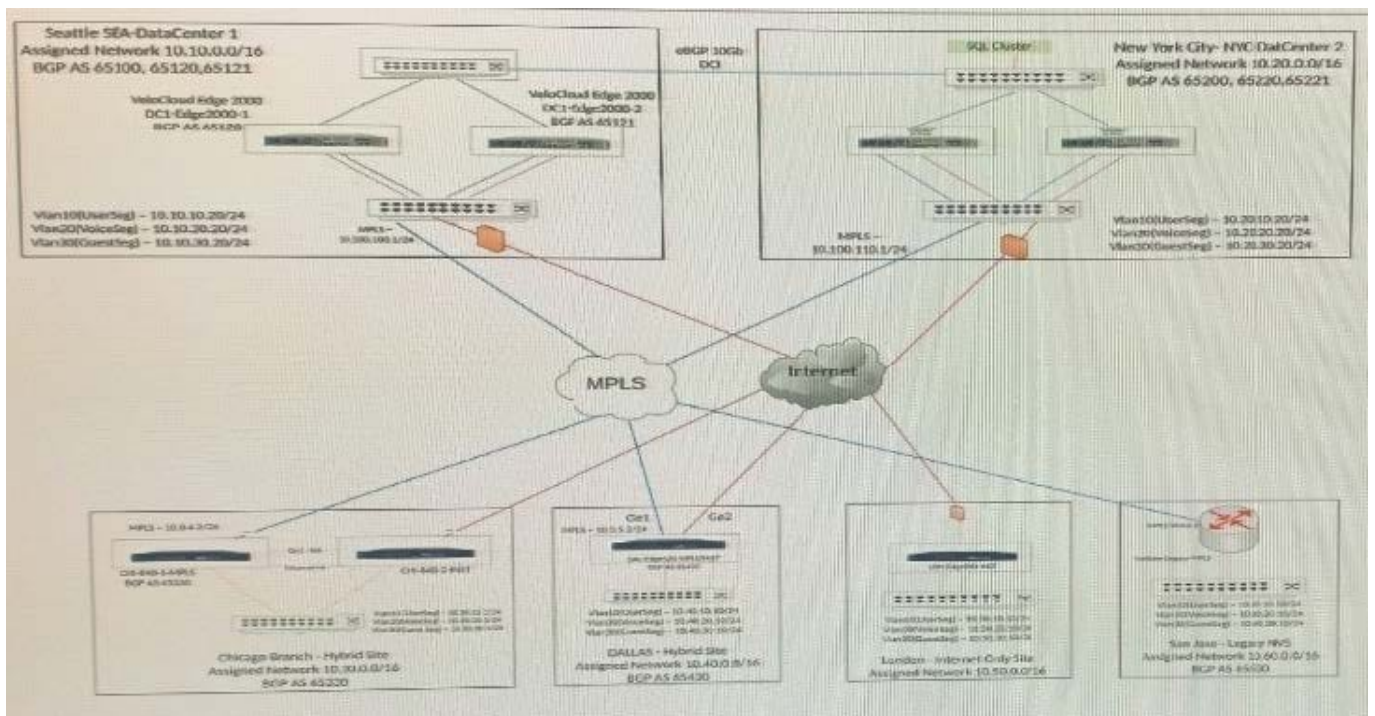

After deploying the Edge, the security team has determined that traffic from Guest wireless traffic is able to reach resources in the Production network. There should be absolutely no interaction.

How can this be prevented?

- A. Create an additional segment for Guest wireless traffic and leave the Production traffic in the default global segment.
- B. Segmentation is currently not supported on Velocloud Edge.
- C. Create two subnets, one for Guest wireless traffic and another one for Production traffic.
- D. Have Guest wireless and Production traffic in the same segment but different VLANs.


Correct Answer: A

QUESTION 3

Scenario 2:

After completing the branch activation activities for all required branches, the network administrator attempts to test connectivity between the various branches and between the hubs and branches. The administrator notices a lack of connectivity despite being certain that configurations have been complete. The administrator also observed that several users are reporting intermittent connectivity to some of the applications they are accessing. Other users are reporting no access to these applications. Other users at some of the branches claim they cannot get to certain public resources. The administrator wants to ensure that all sites can talk to each other and all resources are accessible.

Exhibit.

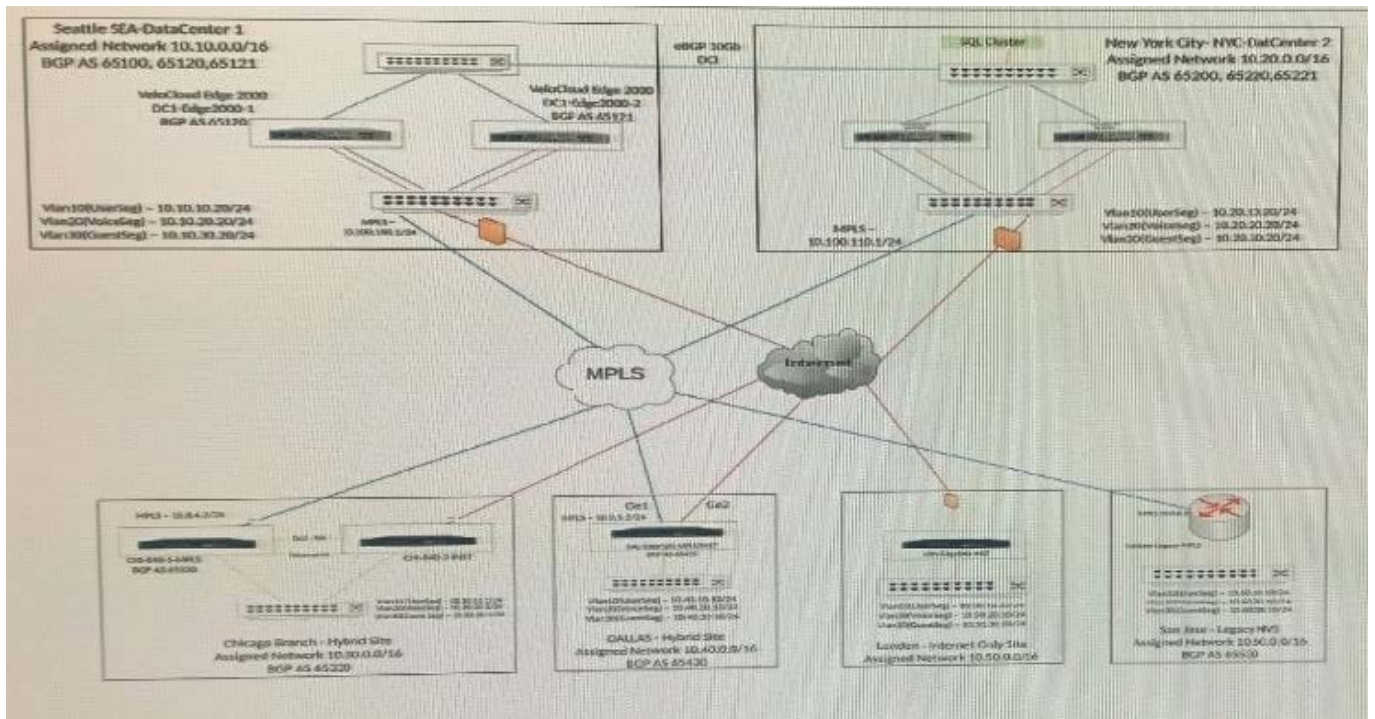

Users at the London site are complaining of various intermittent issues around websites not loading, or applications being remotely accessed disconnecting sporadically and reconnecting after a few minutes. The network administrator does not see anything strange on the Edge overview page and decides to check if the CPU or memory have been hitting close to 100?

Where should the administrator verify this information?

- A. In the VCO > Test 8c Troubleshoot > Remote Diagnostics > System Status
- B. In the VCO > Monitor > Click London\_Site01 > Click the System Tab
- C. In the VCO > Remote Troubleshooting > Remote Actions > System Status
- D. In the VCO > Monitor > Alerts


Correct Answer: B

QUESTION 4

Scenario 2:

After completing the branch activation activities for all required branches, the network administrator attempts to test connectivity between the various branches and between the hubs and branches. The administrator notices a lack of connectivity despite being certain that configurations have been complete. The administrator also observed that several users are reporting intermittent connectivity to some of the applications they are accessing. Other users are reporting no access to these applications. Other users at some of the branches claim they cannot get to certain public resources. The administrator wants to ensure that all sites can talk to each other and all resources are accessible.

Exhibit.

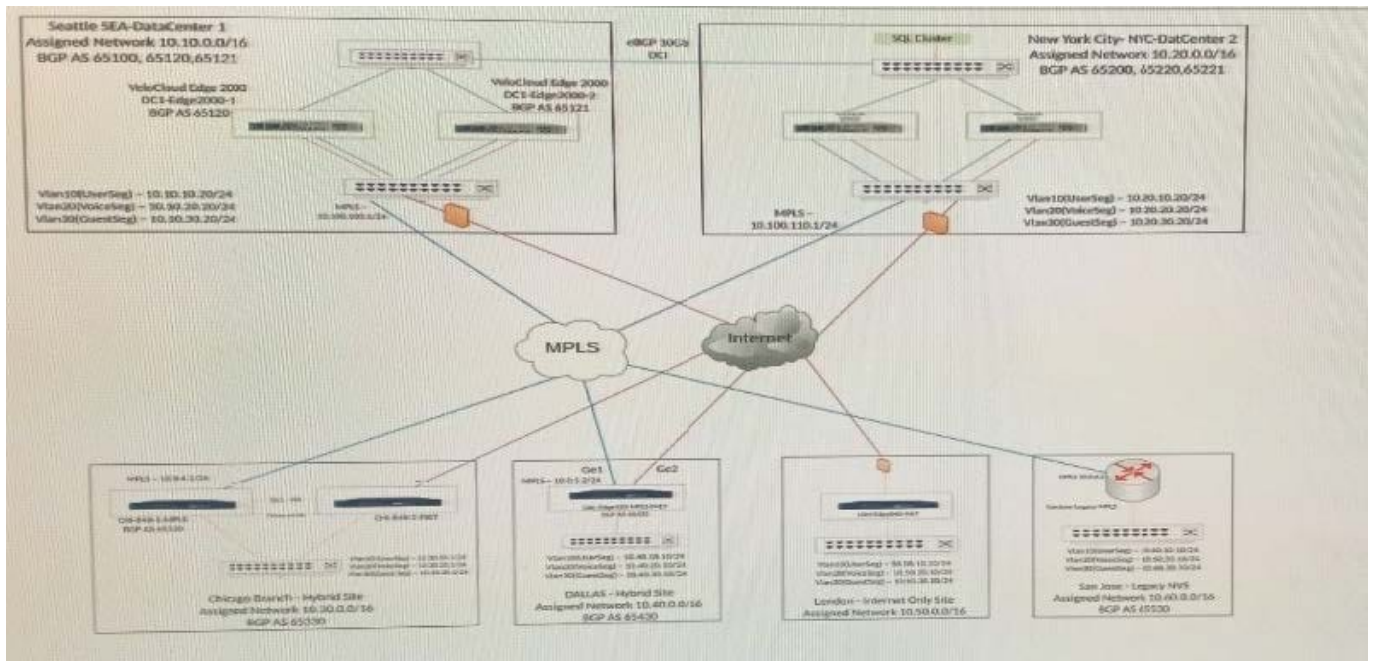

A network administrator is trying to create multiple overlays on a single physical interface on an Edge. The administrator is able to bring up only a single overlay so far, but is having trouble with bringing up additional overlays.

What could be the possible reason?

- A. The administrator does not have the right permission to create multiple overlays. The administrator needs to have an Operator-level privilege for this task.
- B. On the WAN overlay configuration, verify the IP address, next-hop, and the VLAN ID configuration.
- C. The licensing does not support multiple overlays on a single physical interface.
- D. Multiple overlays cannot be created on a single physical interface. Multiple physical interfaces are needed.


Correct Answer: A

QUESTION 5

Scenario 2:

After completing the branch activation activities for all required branches, the network administrator attempts to test connectivity between the various branches and between the hubs and branches. The administrator notices a lack of connectivity despite being certain that configurations have been complete. The administrator also observed that several users are reporting intermittent connectivity to some of the applications they are accessing. Other users are reporting no access to these applications. Other users at some of the branches claim they cannot get to certain public resources. The administrator wants to ensure that all sites can talk to each other and all resources are accessible.

Exhibit.

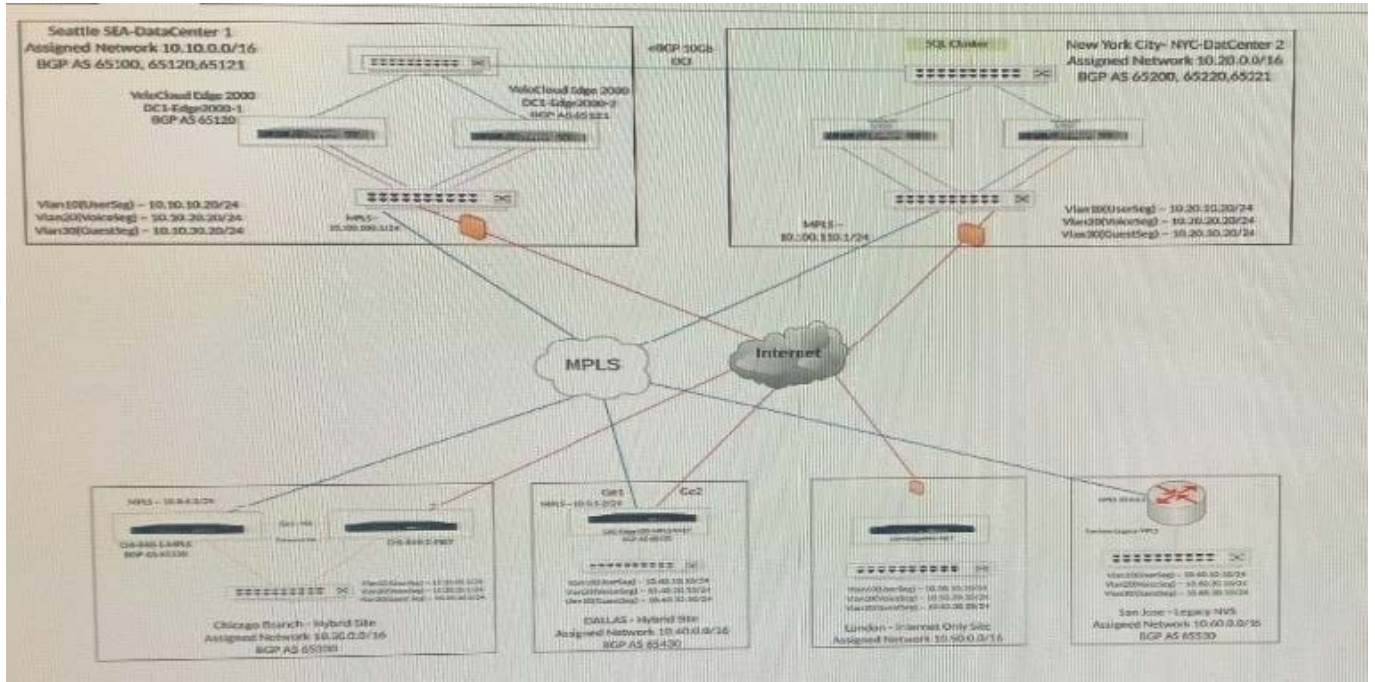

A network administrator has received an email from the applications development team requesting connectivity to their AWS VPC.

The administrator has configured the tunnel via the VMware SD-WAN Gateway. The tunnel status icon has not turned green.

Where are two places the administrator must check? (Choose two.)

- A. Determine if the DH parameter on the Edge has been configured.
- B. Determine if the PSK is mismatched between the AWS side and the VeloCloud Edge.
- C. Determine if the NVS has been enabled and assigned to a profile.
- D. Determine if the PSK is mismatched between the AWS side and the VeloCloud Gateway.

Correct Answer: BD