Leads4Pass

600-660^{Q&As}

Implementing Cisco Application Centric Infrastructure - Advanced

Pass Cisco 600-660 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.leads4pass.com/600-660.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

⚙ **Instant Download** After Purchase

⚙ **100% Money Back** Guarantee

⚙ **365 Days** Free Update

⚙ **800,000+** Satisfied Customers

QUESTION 1

What are two characteristics of Cisco ACI and Spanning Tree Protocol interaction? (Choose two.)

A. When a TCN BPDU is received in a VLAN, Cisco ACI flushes the endpoints for the associated encapsulation.

B. STP BPDUs are dropped due to MCP.

C. MST BPDUs are flooded correctly in Cisco ACI fabric without additional configuration.

D. BPDU filter and BPDU guard can be configured on Cisco ACI leaf edge ports.

E. Cisco ACI must be configured as the STP root for all VLANs.

Correct Answer: DE

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/aci_virtual_edge/configuration/1-x/b_Virtual_Edge_Config_Guide_1_2_2/b_Virtual_Edge_Config_Guide_1_2_2_chapter_0101.html

QUESTION 2

A network engineer configured an active-active firewall cluster that is stretched across separate pods in the Cisco ACI fabric. Which two implementation setups for anycast services are available? (Choose two.)

A. Modify the Cisco ACI contract scope

B. Modify the MAC address on the second firewall

C. Configure the firewalls behind an EPG subnet

D. Deselect No Default SVI Gateway under EPG Subnet

E. Deploy a Layer 4 to Layer 7 service graph with PBR

Correct Answer: BC

QUESTION 3

What is the purpose of the Forwarding Tag (FTAG) in Cisco ACI?

A. FTAG is used in Cisco ACI to add a label to the iVXLAN traffic in the fabric to apply the correct policy.

B. FTAG is used in Cisco ACI to add a label to the VXLAN traffic in the fabric to apply the correct policy.

C. FTAG trees in Cisco ACI are used to load balance unicast traffic.

D. FTAG trees in Cisco ACI are used to load balance mutli-destination traffic.

Correct Answer: D

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/aci-fundamentals/b_ACI-

Fundamentals/b_ACI-Fundamentals_chapter_010010.html#concept_1E8BF286E1C043EF839D80935FDF9F50

QUESTION 4

An engineer designers a Cisco ACI Multi-Pod solution that requires a pair of active-standby firewalls in different pods for external connectivity. How should the firewalls be implemented?

A. PBR for routed firewalls

B. separate L3Out peerings for routed firewalls

C. routed firewall for the default gateway

D. transparent firewalls

Correct Answer: D

Reference: https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-739571.html

QUESTION 5

Filter - SSH
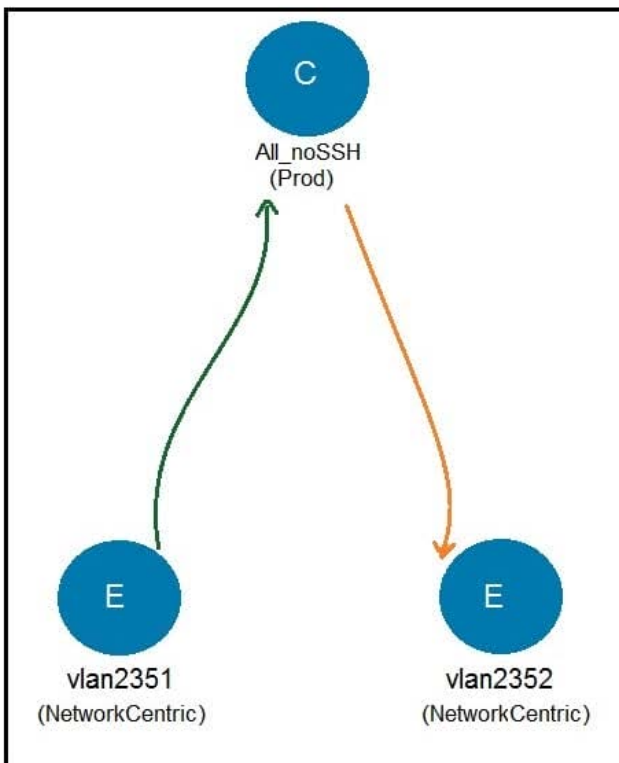
Policy   Faults   History

Properties

Name: SSH

Alias: [   ]

Description: [optional   ]

Tags: [   ]
enter tags separated by comma

Global Alias: [   ]

Entries:

Name	Alias	EtherType	ARP Flag	IP Protocol	Match Only Fragme	Stateful	Source Port/Range		Destination Port/Range	
							From	To	From	To
ssh		IP		tcp	False	False	unspecified	unspecified	22	22

Refer to the exhibits. Which subject must be configured for the All_noSSH contract to allow all IP traffic except SSH between the two EPGs?

A.

B.

C.

D.

Correct Answer: D

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/ACI_Best_Practices/b_ACI_Best_Practices/b_ACI_Best_Practices_chapter_010.html