642-732^{Q&As}

Conducting Cisco Unified Wireless Site Survey (CUWSS) v2.0

Pass Cisco 642-732 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.lead4pass.com/642-732.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco Official Exam Center

⚙ **Instant Download** After Purchase

⚙ **100% Money Back** Guarantee

⚙ **365 Days** Free Update

⚙ **800,000+** Satisfied Customers

QUESTION 1

When performing a post-installation audit with an auditing tool such as Ekahau, which three steps are associated with the passive portion of the audit? (Choose three.)

A. Check for co-channel interference.

B. Make sure you emulate your customer client.

C. Survey by SSID to ensure roaming is taking place.

D. Check that you have adequate signal levels as surveyed.

E. Verify that the network traffic of physical data rate and packet loss meets user requirements.

F. Verify AP announced data rate coverage.

Correct Answer: ADF

QUESTION 2

Refer to the exhibit.

After performing a Layer 1 survey using Cisco Spectrum Expert, what is the result indicated by the visual screen?
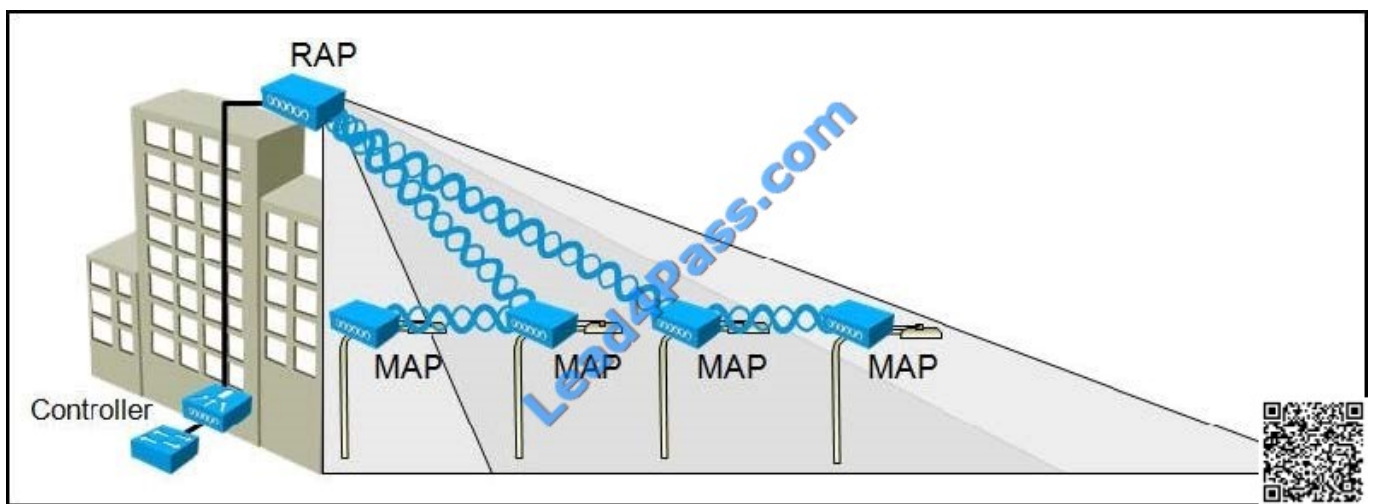
A. Normal 802.11g activity

B. Microwave oven interference

C. Video camera interference

D. Bluetooth device interference

E. RF jammer

Correct Answer: B

QUESTION 3

Refer to the exhibit.

What is the most likely cause of MAP1 association to MAP2 instead of directly to the RAP?

A. Incorrect BGN

B. Default BGN

C. SNR

D. Absorption and scattering caused by weather conditions.

E. Incorrect radio configuration

Correct Answer: C

QUESTION 4

During the site survey kick-off meeting with your customer, they ask why you need to verify the existing network infrastructure. Which two reasons do you give them? (Choose two.)

A. You need to verify the make, model, and software versions of all the equipment that will connect to the WLAN components in order to ensure compatibility.
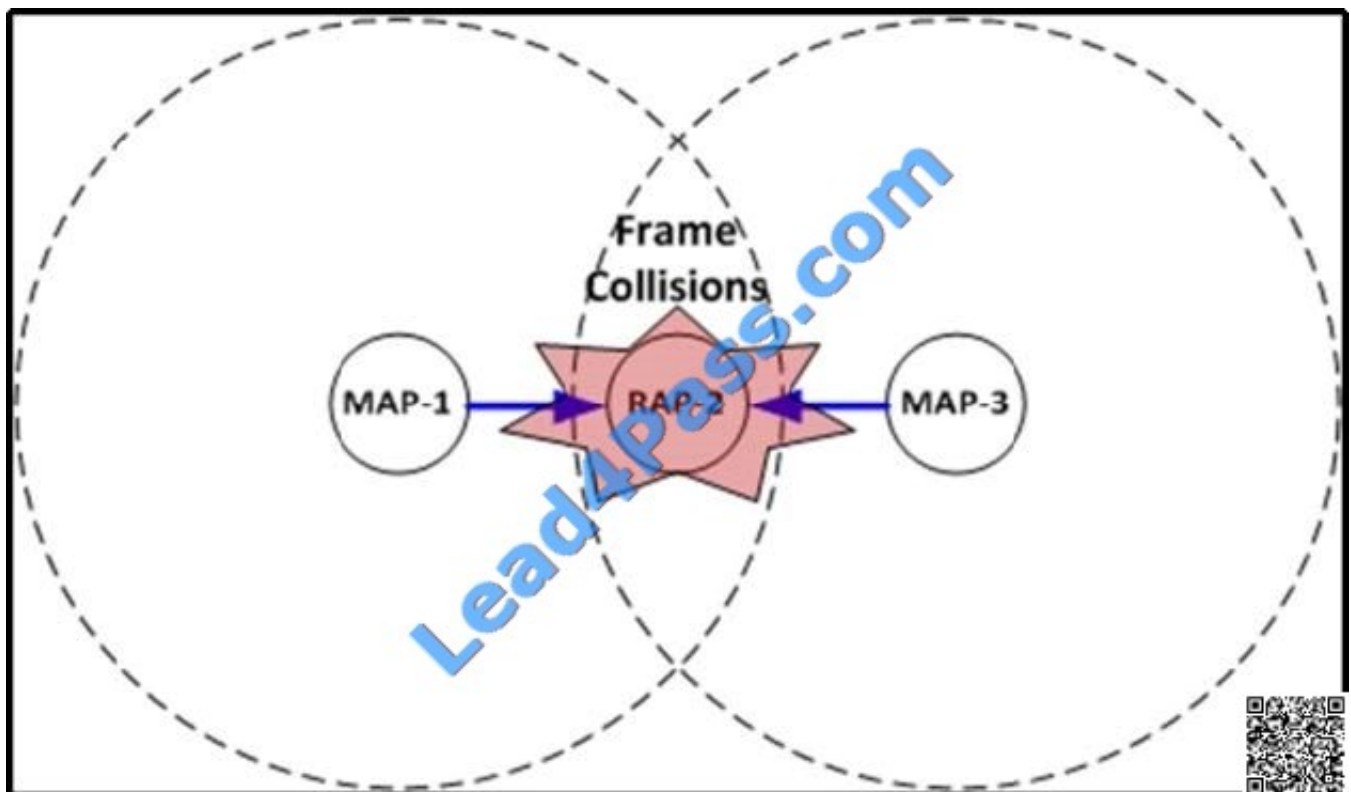
B. You need to verify that the equipment the WLAN components will connect to has sufficient memory capacity to support the additional WLAN connections.

C. You need to verify that there are sufficient switch ports to support the new WLAN connections.

D. You need to verify that the switches the WLAN components will connect to can supply 802.3af inline power, and that they have sufficient ports to support all the new WLAN devices.

E. Depending on the type of APs that are planned for, the deployment may require different types of PoE to be supplied by the LAB switches.

Correct Answer: CD

QUESTION 5

Refer to the exhibit. During a post Mesh deployment survey, an engineer notices frame collisions occurring when MAP-1 and MAP-3 talk to RAP-2. Which type of issue is the engineer observing?

A. hidden node

B. exposed node

C. co-channel interference

D. CSMA-CA

E. backhaul latency

Correct Answer: A

642-732 VCE Dumps   642-732 Practice Test   642-732 Study Guide

To Read the Whole Q&As, please purchase the Complete Version from Our website.
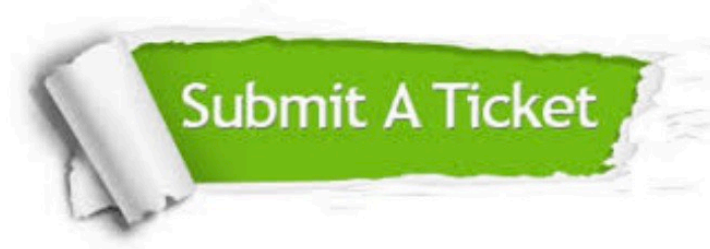
Try our product !

100% Guaranteed Success
100% Money Back Guarantee
365 Days Free Update
Instant Download After Purchase
24x7 Customer Support
Average 99.9% Success Rate
More than 800,000 Satisfied Customers Worldwide
Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications.
You can view Vendor list of All Certification Exams offered:

https://www.lead4pass.com/allproducts

Need Help

Please provide as much detail as possible so we can best assist you.
To update a previously submitted ticket: