



644-906^{Q&As}

Implementing and Maintaining Cisco Technologies Using IOS XR

Pass Cisco 644-906 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.lead4pass.com/644-906.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

What is the correct procedure to associate a VRF to a static route?

- A. configure the VRF under the interface
- B. specify the VRF under "router static" in configuration mode
- C. define the VRF in the global configuration
- D. specify the VRF in the route global configuration command

Correct Answer: B

QUESTION 2



Instructions

Enter the proper CLI commands and analysis the outputs on the PE5 Cisco router to answer the **three** multiple-choice questions.

From the network topology diagram, click on the PE5 router icon to gain access to the console of the router.

No console or enable passwords are required.

There are three multiple-choice questions with this task. Be sure to answer all three questions before selecting the Next button.

Not all the CLI commands or commands options are supported or required for this simulation. If a certain command or command option is not supported, please try to use a different command or command option that is supported.


For example, the show running-config command is **NOT** supported in this simulation.

All the devices in this simulation have been pre-configured and you are not required to enter in any configurations.

Scenario

Referring to the network topology diagram shown in the exhibit, use the proper CLI commands on the PE5 router and interpret the supported CLI commands outputs to answer the **three** multiple choice questions.

Note: The PE5 router is a Cisco ASR9K router

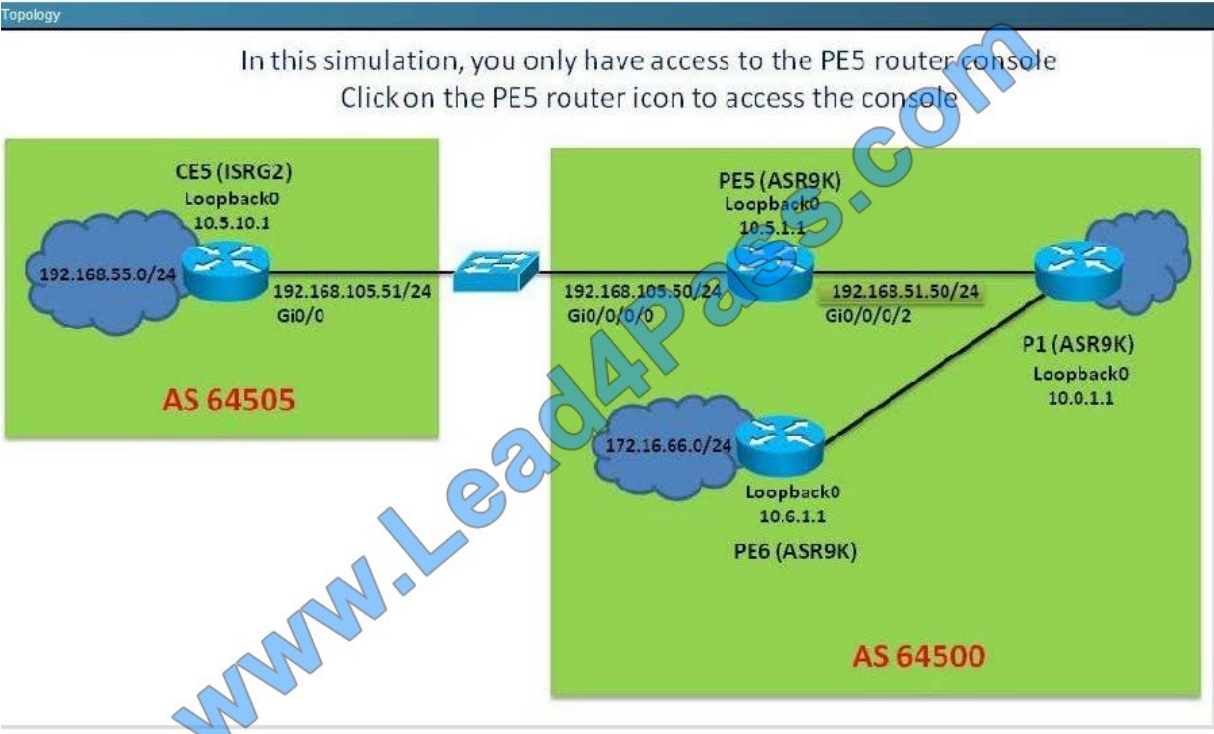

PE5

```
PE5#
```



Hot Area:

- 1 Which two statements regarding the BGP operations on PE5 are correct? (Choose two)
- 2 PE5 will set the local preference to 200 on all the prefixes sent to CE5
- 3 PE5 will set the local preference to 200 on all the prefixes learned from CE5
- PE5 is using the IS-IS route to reach the BGP next-hop for the 172.16.66.0/24 prefix
- The BGP session between PE5 and CE5 is established using the loopback interface

Hot Area:

- 1 Which two statements regarding the BGP operations on PE5 are correct? (Choose two)
- 2 PE5 will set the local preference to 200 on all the prefixes sent to CE5
- 3 PE5 will set the local preference to 200 on all the prefixes learned from CE5
- PE5 is using the IS-IS route to reach the BGP next-hop for the 172.16.66.0/24 prefix
- The BGP session between PE5 and CE5 is established using the loopback interface

Correct Answer:

- 1 Which two statements regarding the BGP operations on PE5 are correct? (Choose two)
- 2 PE5 will set the local preference to 200 on all the prefixes sent to CE5
- 3 PE5 will set the local preference to 200 on all the prefixes learned from CE5
- PE5 is using the IS-IS route to reach the BGP next-hop for the 172.16.66.0/24 prefix
- The BGP session between PE5 and CE5 is established using the loopback interface

QUESTION 3

Refer to the exhibit.

```
Conf
Interface TenGigE0/0/3/0
ipv6 address 10:10::1/64
ipv6 address 20:20::1/64
No shut
Commit
```

What is the expected behavior for the following Cisco IOS XR config?

- A. The interface will have IPv6 address 10:10::1/64 only.
- B. The interface will have IPv6 address 20:20::1/64 only.



- C. The interface will have IPv6 address 10:10::1/64 and IPv6 address 20:20::1/64.
- D. The commit will fail.

Correct Answer: C

QUESTION 4

What are the two prerequisites for enabling multicast-only fast reroute (MoFRR) in a network? (Choose two.)

- A. There must be an Equal-Cost Multipath (ECMP) topology.
- B. IP multicast traffic must use the group address 232.0.0.0/8.
- C. PIM-SSM needs to be configured.
- D. There must be a valid reverse path back to the multicast source.

Correct Answer: AD

QUESTION 5

Which command configures IPv4 uRPF strict mode on an interface?

- A. ipv4 verify unicast source reachable-via any
- B. ipv4 verify unicast source reachable-via tx
- C. ipv4 verify unicast source reachable-via rx
- D. ipv4 verify unicast destination reachable-via rx
- E. ipv4 verify multicast source reachable-via tx

Correct Answer: C

[644-906 PDF Dumps](#)

[644-906 Study Guide](#)

[644-906 Braindumps](#)



To Read the [Whole Q&As](#), please purchase the [Complete Version](#) from [Our website](#).

Try our product !

100% Guaranteed Success
100% Money Back Guarantee
365 Days Free Update
Instant Download After Purchase
24x7 Customer Support
Average 99.9% Success Rate
More than 800,000 Satisfied Customers Worldwide
Multi-Platform capabilities - [Windows](#), [Mac](#), [Android](#), [iPhone](#), [iPod](#), [iPad](#), [Kindle](#)

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications.
You can view Vendor list of All Certification Exams offered:

<https://www.lead4pass.com/allproducts>

Need Help

Please provide as much detail as possible so we can best assist you.
To update a previously submitted ticket:



 <p>One Year Free Update Free update is available within One Year after your purchase. After One Year, you will get 50% discounts for updating. And we are proud to boast a 24/7 efficient Customer Support system via Email.</p>	 <p>Money Back Guarantee To ensure that you are spending on quality products, we provide 100% money back guarantee for 30 days from the date of purchase.</p>	 <p>Security & Privacy We respect customer privacy. We use McAfee's security service to provide you with utmost security for your personal information & peace of mind.</p>
---	---	--

Any charges made through this site will appear as Global Simulators Limited.
All trademarks are the property of their respective owners.
Copyright © lead4pass, All Rights Reserved.