# **DES-1121** Q&As

Specialist - Implementation Engineer PowerMax and VMAX Family Solutions Version 1.0

### Pass EMC DES-1121 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.leads4pass.com/des-1121.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by EMC
Official Exam Center

- Instant Download After Purchase
- 100% Money Back Guarantee
- 365 Days Free Update
- 800,000+ Satisfied Customers





### **QUESTION 1**


What is a minimum requirement for Dell EMC VSI 8.0 on a VMAX All Flash array?

- A. Unisphere 8.x
- B. Unisphere 9.x
- C. 5977 1125.1125
- D. 5977.1131.1131

Correct Answer: C

#### **QUESTION 2**

Production work has been started on the R2 devices after an 5RDF Failover operation. Where will the changes made to the R2 devices be reflected in the SRDF Query output shown in the exhibit?

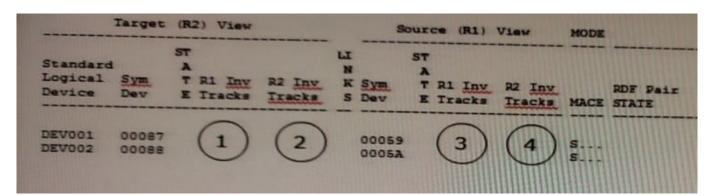

- A. 1
- B. 2
- C. 3
- D. 4

Correct Answer: A

#### **QUESTION 3**

An administrator is using Unisphere tor PowerMax Workload Planner to assess the performance and compliance of a PowerMax Storage Group (SG) How does the Planner calculate if the Storage Group workload is stable?

- A. Both calculated values are within a 10-15% threshold of the SL-defined response time
- B. Both calculated values are within the SL-defined response time

## Leads4Pass

C. One of the calculated values remains within the SL-defined response time

https://www.leads4pass.com/des-1121.html 2024 Latest leads4pass DES-1121 PDF and VCE dumps Download

D. One of the calculated values is within	10-20% of the SL-defined response time	
Correct Answer: D		
QUESTION 4		
What is the maximum number of system	ns controlled by Unisphere 360?	
A. 64		
B. 100		
C. 128		
D. 200		
Correct Answer: D		
QUESTION 5		
Which command is used to change the	CPU resource distribution for SRDF modes	s?
A. symqos		
B. symconfigure		
C. symrdf		
D. symcfg		
Correct Answer: D		
Latest DES-1121 Dumps	DES-1121 VCE Dumps	DES-1121 Study Guide