E20-807 ^{Q&As}

E20-807 ^{Q&As}

Expert - VMAX All Flash and VMAX3 Exam

Pass EMC E20-807 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.leads4pass.com/e20-807.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by EMC
Official Exam Center

⚙ **Instant Download** After Purchase

⚙ **100% Money Back** Guarantee

⚙ **365 Days** Free Update
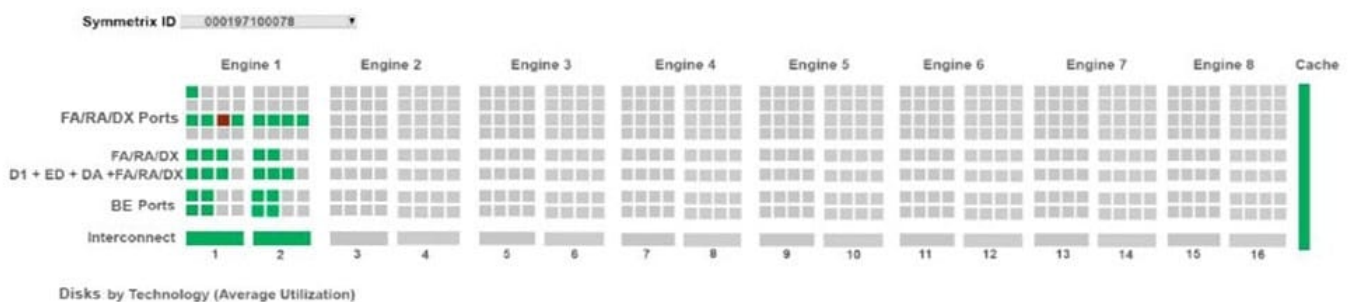
⚙ **800,000+** Satisfied Customers

QUESTION 1

To determine Service Level Objective compliance on a VMAX3, where is the I/O response time measured?

A. Frontend Directors

B. Host Bus Adapters

C. SAN Switches

D. Backend Directors

Correct Answer: B

QUESTION 2

Based on the Array Utilization Dashboard shown in the exhibit, a frontend port is showing higher utilization on Director 1. How can this situation be corrected?

A. Add another engine to provide for Frontend Emulation CPUs

B. Redistribute the workload onto other available ports

C. Increase cache on the engine

D. Add additional capacity to support the frontend workload

Correct Answer: B

QUESTION 3

What is the best practice for FA utilization in a VMAX3 array?

A. 50% busy with two engines

B. 50% busy with more than two engines

C. 50% busy with one engine

D. 50% busy with two or more engines

Correct Answer: A

QUESTION 4

An organization plans to implement a VMAX3 solution using a two tier configuration. They are sensitive to data loss. the array will include:

10 x Flash drives 144 x 10k drives Based on Dell EMC recommended best practices, how should the 10K drives be configured?

A. 1 group RAID 6 (14+2)

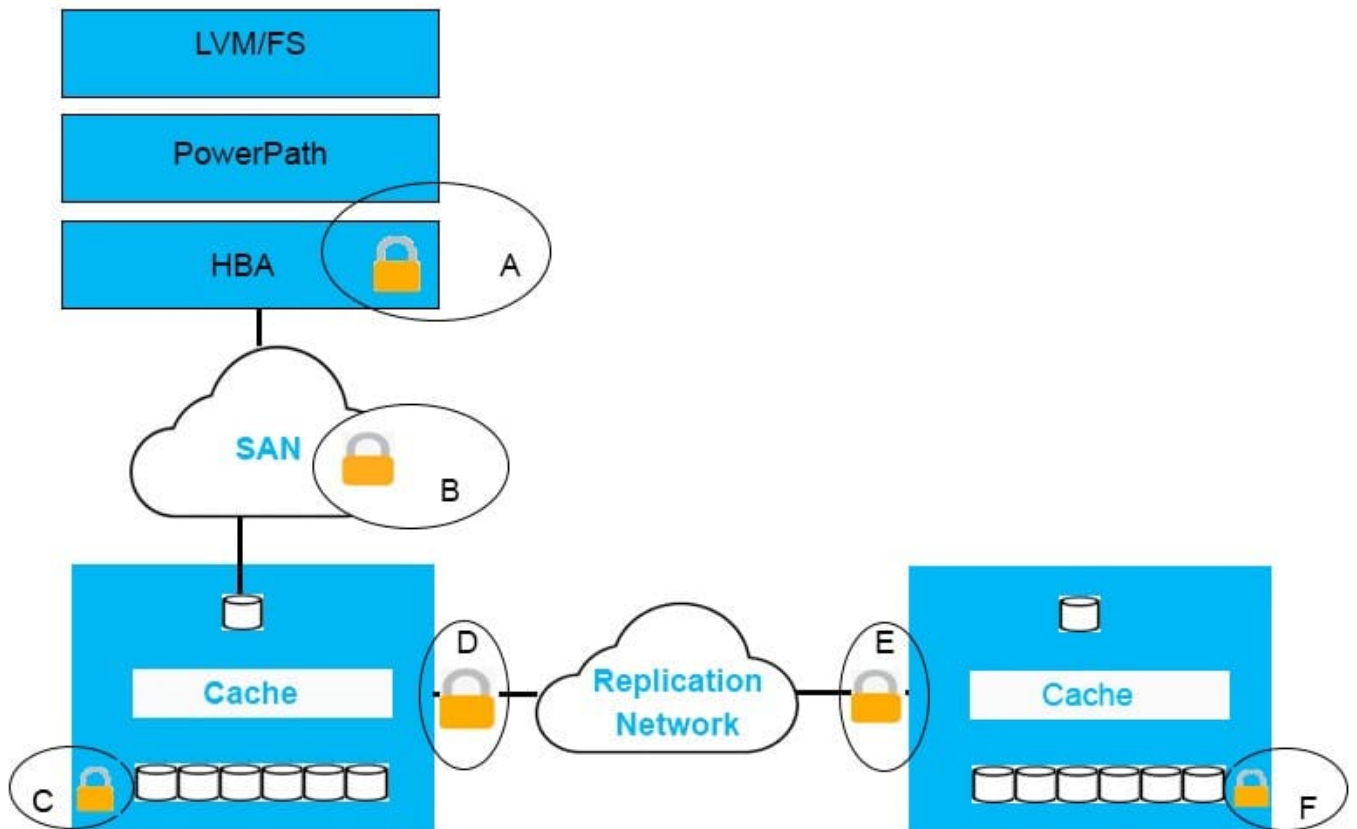B. 2 groups RAID 6 (6+2)

C. 2 groups RAID 5 (7+1)

D. 4 groups RAID 5 (3+1)

Correct Answer: B

QUESTION 5

Based on the exhibit, where is data considered to be in motion?

A. SAN and replication network

B. Host, SAN, and arrays

C. Host and arrays

D. SAN, arrays, and replication network

Correct Answer: C

E20-807 VCE Dumps   E20-807 Practice Test   E20-807 Braindumps