

H12-211^{Q&As}

HCIA-Routing & Switching V2.2

Pass Huawei H12-211 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/h12-211.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Huawei
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

UDP is connectionless and must use () to provide the reliability of the transmission.

- A. Internet Protocol
- B. Application layer protocol
- C. Network layer protocol
- D. Transmission Control Protocol

Correct Answer: B

QUESTION 2

Two routers have established a point-to-point network using PPP. The administrator has configured the routers to run OSPF in the same area with the same router ID, what will behavior will occur as a result of the configuration?

- A. The routers will build a neighbor relationship even though both routers are using the same router ID.
- B. VRRP will notify of a router ID conflict between the two routers.
- C. The routers will build an adjacency even though both routers are using the same router ID.
- D. The routers will not send hello packets to each other because they are using the same router ID.

Correct Answer: B

QUESTION 3

In RSTP, a backup port can replace a faulty root port.

- A. TRUE
- B. FALSE

Correct Answer: A

QUESTION 4

In the command `fr map ip 10.1.1.2 200`, the meaning of the number 200 is ().

- A. Peer logical channel number
- B. Local DLCI number
- C. Peer interface number


D. Peer node number

Correct Answer: B

QUESTION 5

As shown in the figure, the host has established a connection with the router through Telnet. For the data sent by the host to the router, the following description is positive.

Indeed (). (multiple choice)

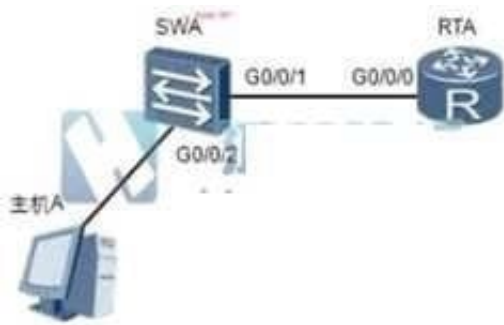

- A. The destination MAC address of the data frame sent by the host is the MAC address of the interface G0/0/0 of the router.
- B. The destination MAC address of the data frame sent by the host is the MAC address of the switch.
- C. The destination port number in the data segment sent by the host is 80.
- D. The destination IP address of the packet sent by the host is the IP address of the interface G0/0/0 of the router.

Correct Answer: AD

[H12-211 PDF Dumps](#)

[H12-211 Practice Test](#)

[H12-211 Braindumps](#)