

# H12-261<sup>Q&As</sup>

HCIE-Routing & Switching (Written) V3.0

## Pass Huawei H12-261 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/h12-261.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Huawei  
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



## QUESTION 1


Which of the following statements regarding a TCP sliding window are false?

- A. The sender advertises the size of the initial window.
- B. If the sender does not receive an acknowledgment message after the retransmission timer times out, it retransmits the unacknowledged data.
- C. The sliding window size can only be increased or remains unchanged.
- D. A TCP sliding window allows the sender to send multiple data packets before receiving an acknowledgment message.
- E. The sender does not need to transmit packets with a complete window size.

Correct Answer: ABE

## QUESTION 2

The configuration of two routers in a company is as follows. The following is true about the routing table method.

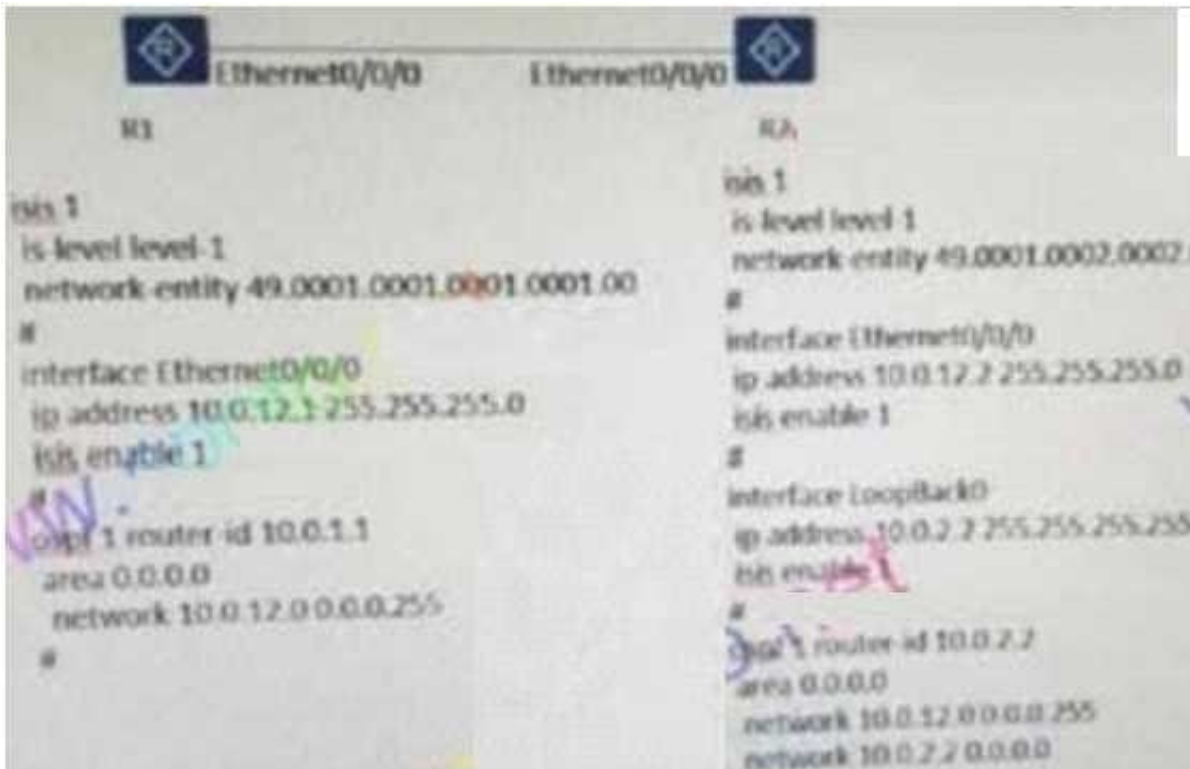

- A. Only when the priority of the R2 IS-IS 5 R1 10.0.2.2/32 P OSPF protocol is adjusted to be the routing entry of the destination network segment will be generated.
- B. If the priority of the R1 IS-IS 5, R1 10.0.2.2/32 P OSPF protocol is adjusted to then the route entry of the destination network segment is generated.

C. If the priority of the R1 ISIS 5, R1 10.0.2.2/32 P ISIS protocol is adjusted to then the routing entry on the destination network segment is generated.

D. If the R2 ISIS 5, R1 10.0.2.2/32 P ISIS protocol priority level is adjusted to then the destination segment is generated by the route entry.

Correct Answer: C

---

### QUESTION 3

For Layer 2 VPN technology, the following is correct?

A. VPLS is a widely used technology for the network. It can provide three-layer transparent layer reporting and multi-point access.

B. VPLS BUM configuration complex high-complexity, two-network transparent layer transmission message

C. BGP EVPN multi-homing supports leased isolation, and broadcast suppression

D. BGP EVPN VPLS MAC solves the problem of address drift and multi-tenancy that cannot be supported.

Correct Answer: BCD

---

### QUESTION 4

In order to configure AAA, XRADIUS RADIUS: First, you need to define the server as follows: [Huawei ]radius-server template EXAM [Huawei-radius-EXAM]radius-serve shared-key cipher HUAwei123 [Huawei-radius-EXAM]radius-se Authentication 10.7.66.66 1812 [Huawei-radius-EXAM]radius-se authorization 10.7.66.661812 [Huawei radius -EXAM]radius-server retransmit 27. 1813 [Huawei-radius-EXAM]radius-serv accounting 10

A. True


B. False

Correct Answer: B

---

### QUESTION 5

As shown in the figure, in IPv4 and IPv6 environments, the value of the SEL field in the IS-IS NET address is always 00.

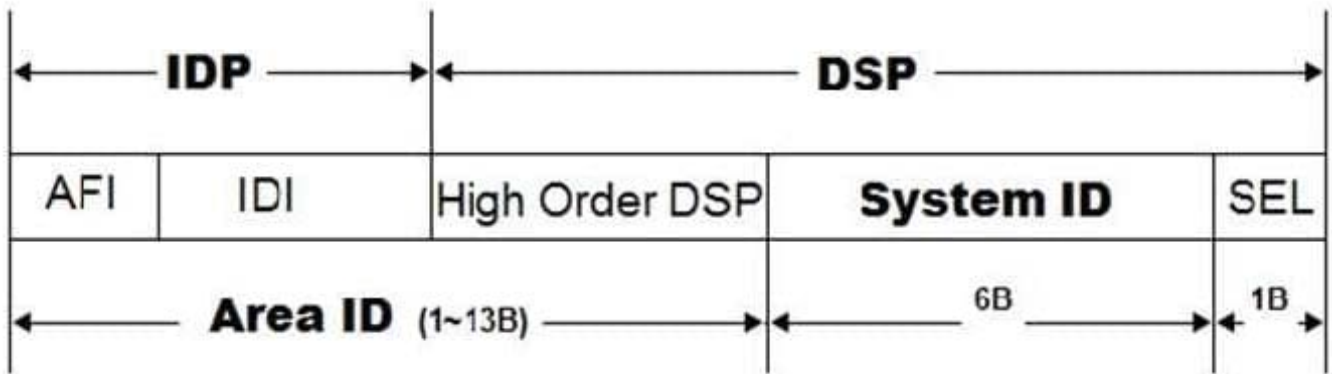

A. TRUE

B. FALSE

Correct Answer: A

[Latest H12-261 Dumps](#)

[H12-261 VCE Dumps](#)

[H12-261 Study Guide](#)