

## H12-831<sup>Q&As</sup>

HCIP-Datacom-Advanced Routing & Switching Technology V1.0

### Pass Huawei H12-831 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/h12-831.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Huawei  
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

Since BGP is an EGP routing protocol, BGP routing policies can only be deployed between EBGP neighbors. The routing policy deployed between IBGP neighbors is invalid.

- A. True
- B. False

Correct Answer: B

---

**QUESTION 2**

Which of the following features affects BGP neighbor establishment?

- A. BGP Certification
- B. BGP GSTM
- C. BGP route filtering
- D. ebgp max hop

Correct Answer: ABD

---

**QUESTION 3**

What is the meaning of display current-configuration | include vlan command?


- A. View each VLAN physical interface information bound to the
- B. See what's currently created VLAN
- C. Check VLAN interface address
- D. View all included "VLAN" configuration of keywords

Correct Answer: D

---

**QUESTION 4**

An engineer uses two routers to test IPv6 services, and runs OSPFv3 to implement IPv6 network interconnection. R1 is required to be able to access the loopback interface address of R2. The engineer checked the OSPFv3 routing table entry of R1, as shown in the figure, and found that there was no route to the loopback interface address of R2. Which of the following reasons could not be the cause?

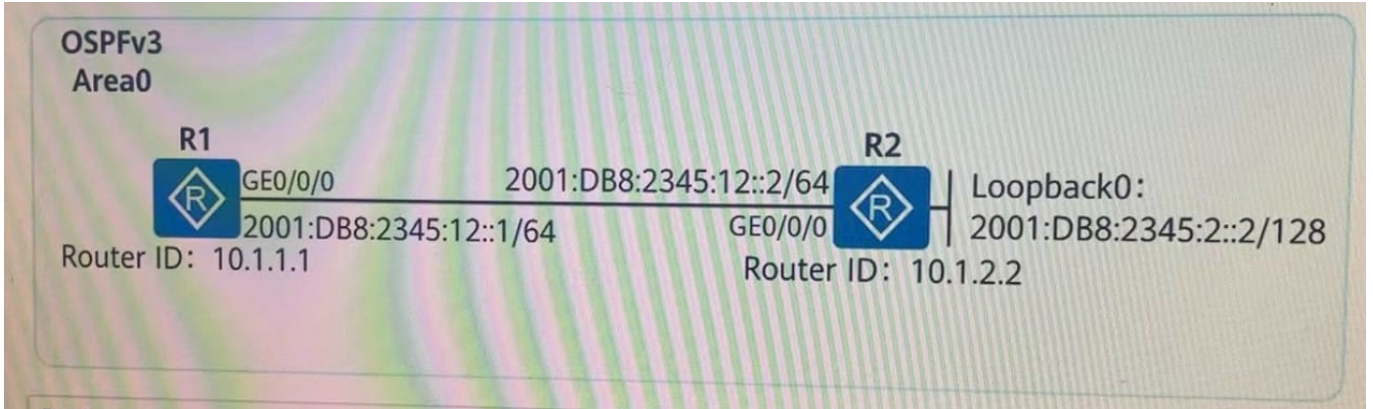

```
[R1]display ospfv3 routing
```

Codes : E2 - Type 2 External, E1 - Type 1 External, IA - Inter-Area, N - NSSA, U - Uninstalled

OSPFv3 Process (1)

Destination	Metric	Next-hop
2001:DB8:2345:12::/64	1	directly connected, GigabitEthernet0/0/1

- A. R2 advertises the loopback interface into different OSPFv3 processes
- B. R2 does not have OSPFv3 enabled on the loopback interface
- C. R2 does not use network to advertise loopback address in area 0
- D. R2 is not configured with the Router ID used in the OSPFv3 process

Correct Answer: B

### QUESTION 5

By executing \_\_\_\_\_ The command can completely isolate the second and third layer users of different ports on the same LAN and cannot communicate. (Please use English and lowercase letters to complete the command, and the command cannot be abbreviated)

- A. port-isolate enable

Correct Answer: A