HP2-T25 $^{Q\&As}$

Servicing HP Rack-Tower Server Solutions

Pass HP HP2-T25 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.lead4pass.com/HP2-T25.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

Instant Download After Purchase

100% Money Back Guarantee

365 Days Free Update

800,000+ Satisfied Customers

QUESTION 1

Which UEFI command is used to back up and store the NVRAM variables of a HP Integrity rx2800 i2?

A. nvrambkp -f

B. dmpstore -s

C. efi_backup -s fs0:

D. drvcfg -s

Correct Answer: B

dmpstore Displays, stores, and restores all UEFI NVRAM variables

QUESTION 2

When installing CPUs in ProLiant Gen8 servers, what is used to help an engineer ensure quick, precise, intelligent processor installation?

A. HP Intelligent Provisioning

B. HP Hot Plug CPU Sockets

C. HP CPU Slot Isolation

D. HP Smart Socket Guide

Correct Answer: D

The server include the following feature:

* HP Smart Socket Guide for quick, precise intelligent processor installation

QUESTION 3

Which RAID level is known as Advance Data Guarding (ADG)?

A. RAID 1

B. RAID 5

C. RAID 6

D. RAID 10

Correct Answer: C

RAID 6 with HPs patented Advanced Data Guarding (ADG) technology is a cost-effective solution for storing large volumes of enterprise data with fault tolerance. Its performance, like that of other RAID levels, depends on the nature of

the application. Organizations implementing a large drive array should consider RAID 6 because it can tolerate up to two simultaneous drive failures without downtime or data loss.

QUESTION 4

An engineer is replacing components in a ProLiant server. When should an ESD strap be used?

A. An ESD only needs to be used when working in moist environments.

B. An ESD strap needs to be used when working on uncarpeted floors.

C. An ESD strap is only needed when static electricity is felt.

D. An ESD strap is not needed since ESD protection is built into the components.

E. An ESD must always be used when replacing components.

Correct Answer: BE

An ESD strap is used to protect from static electricity.

QUESTION 5

How do you enter the RBSU on Post?

A. F8

B. F9

C. F11

D. F12

Correct Answer: B

Tuning procedures Tuning with the ROM-based Setup Utility To configure BIOS low-latency options using RBSU:

1.

 Boot the server.

2.

 When prompted during POST, press F9 to enter RBSU.

3.

 When the RBSU menu appears, press CTRL-A to display the option for the Service Options menu.

4.

 Browse through the menus to change the parameters.

HP2-T25 VCE Dumps   HP2-T25 Exam Questions   HP2-T25 Braindumps

To Read the Whole Q&As, please purchase the Complete Version from Our website.
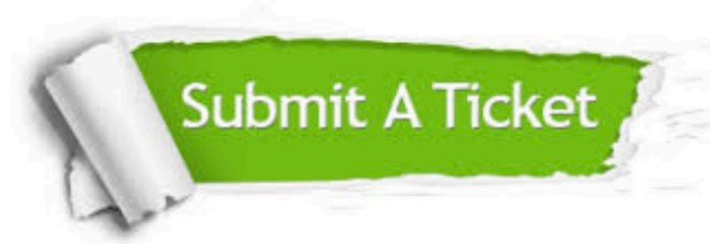
Try our product !

100% Guaranteed Success
100% Money Back Guarantee
365 Days Free Update
Instant Download After Purchase
24x7 Customer Support
Average 99.9% Success Rate
More than 800,000 Satisfied Customers Worldwide
Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications.
You can view Vendor list of All Certification Exams offered:

https://www.lead4pass.com/allproducts

Need Help

Please provide as much detail as possible so we can best assist you.
To update a previously submitted ticket: