

HP2-Z37^{Q&As}

Fast Track - Applying HP FlexNetwork Fundamentals

Pass HP HP2-Z37 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/hp2-z37.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1


A company wants to implement HP Intelligent Resilient Framework (IRF) at the access layer. Which switches could they use?

- A. two HP 5500 HI Series switches
- B. one HP 5412R zL2 Series switch and one HP 5800 Series switch
- C. one HP 5800 Series switch and one HP 5500 Series switch
- D. two HP 5406R zL2 Series switches

Correct Answer: A

QUESTION 2

Refer to the exhibit.

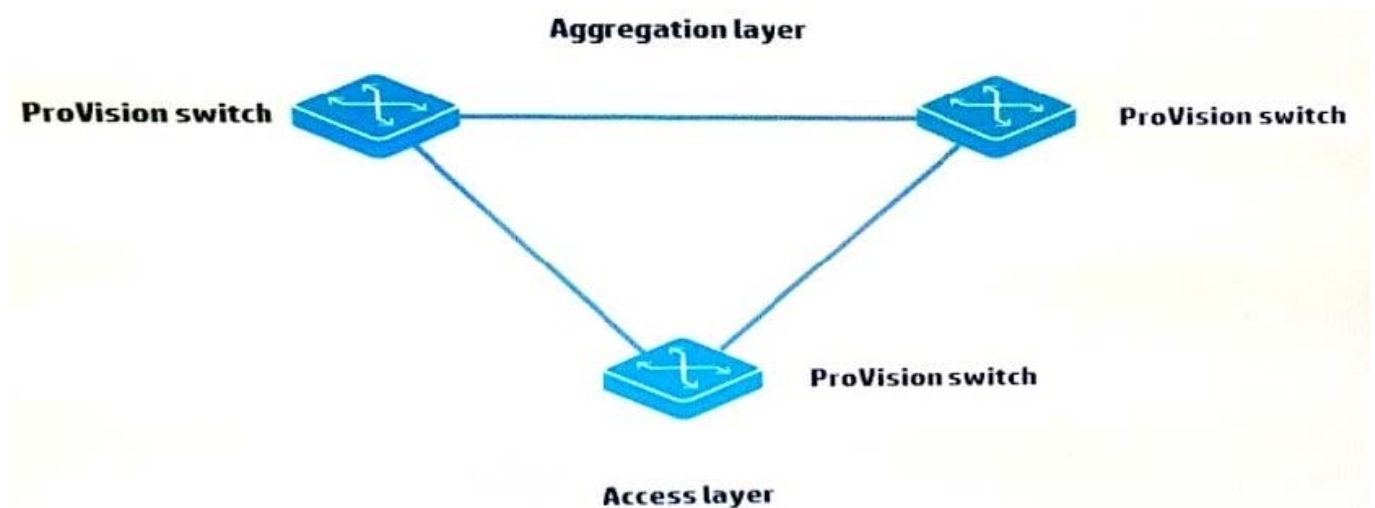

Based on the topology shown in the exhibit, which symptom does a network administrator see if the HP switches are in their factory default states?

- A. Mislearned MAC addresses
- B. Unicast storms
- C. Multiple ARP requests
- D. Layer 3 loop

Correct Answer: C

QUESTION 3

When configuring Multiple Spanning Tree Protocol (MSTP), how should VLANs be separated to perform load balancing?

- A. placed into separate instances
- B. configured with different priority values
- C. never configured with more than one VLAN per instance
- D. placed into separate regions

Correct Answer: A

QUESTION 4


A customer wants to implement multiple links between a server and a single HP Comware switch in order to increase the amount of bandwidth for more throughput. Which feature should the network administrator implement to accomplish this?

- A. MSTP
- B. IRF
- C. link aggregation
- D. MIMO

Correct Answer: B

QUESTION 5

Refer to the exhibit.

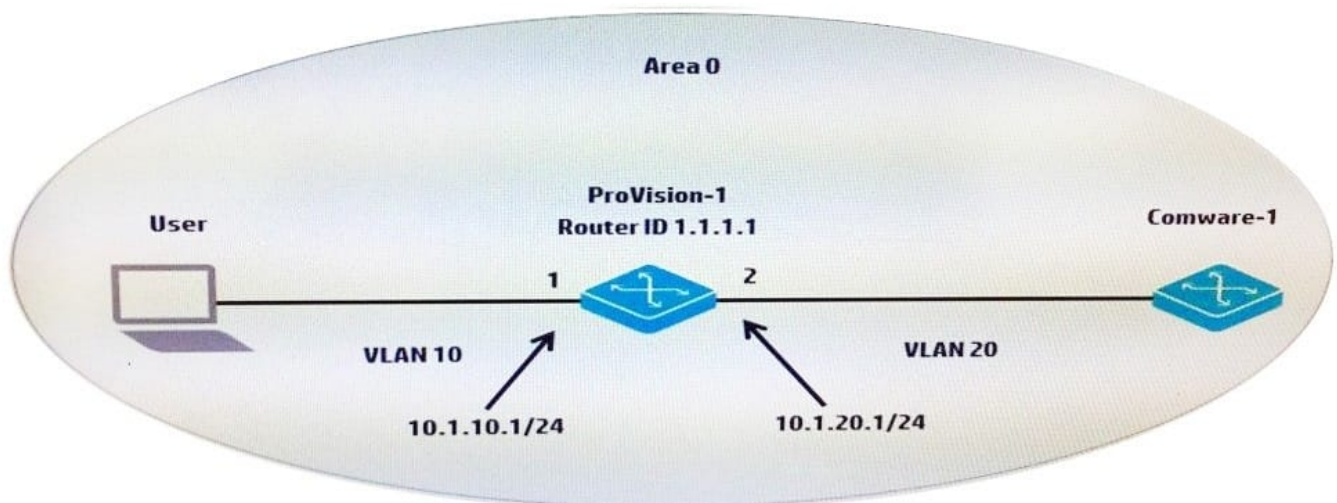

A network administrator sets up OSPF in part of the network topology shown in the exhibit. The Comware-1 switch is already configured. The administrator needs to configure ProVision-1 so that:

-OSPF includes VLANs 10 and 20 in the routing process.

-

The router ID of 1.1.1.1 is assigned to the switch.

-

The ProVision-1 switch can successfully build a neighbor adjacency with the Comware-1 switch. Which configuration should the administrator apply to the ProVision-1 switch to meet these requirements?

A.

```
router-id 1.1.1.1router ospf area 0vlan 10ip ospf area 0vlan 20ip ospf area 0
```

B.

```
router ospf router-id 1.1.1.1area 0 vlan 10area 0 vlan 20enable
```

C.

```
router ospfrouter-id 1.1.1.1area 0 vlan 10area 0 vlan 20
```

D.

```
ip router-id 1.1.1.1router ospfarea 0enablevlan 10 ip ospf area 0vlan 20 ip ospf area 0
```

Correct Answer: D

[HP2-Z37 VCE Dumps](#)

[HP2-Z37 Study Guide](#)

[HP2-Z37 Braindumps](#)