

HPE6-A42^{Q&As}

Implementing Aruba WLAN (IAW) 8

Pass HP HPE6-A42 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/hpe6-a42.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

Which Mobility Master (MM) dashboard should an administrator access to view a list of rogue and interfering APs?

- A. Potential issues
- B. Security
- C. Performance
- D. Network

Correct Answer: B

QUESTION 2

What is one difference between how a network administrator can monitor clients in the Mobility (MM) interface and in the AirWave Management Platform?

- A. AirWave shows trends for the past several minutes, while MM shows longer trends.
- B. AirWave combines information from more sources, such as RADIUS authenticating servers and APs.
- C. AirWave shows the current signal level for the client connection, while MM does not show RF statistics.
- D. MM shows user and role information associated with clients, while AirWave does not.

Correct Answer: B

QUESTION 3

What is one networking setting that a network administrator can configure for roles in an Aruba solution?

- A. DHCP pool
- B. ClientMatch rules
- C. source NAT
- D. bandwidth limit

Correct Answer: D

QUESTION 4

A network administrator adds several new APs to an Aruba solution that uses AirMatch. The administrator does not want to change the channel for the existing APs, but wants the new APs to receive a provisional plan for their channels and power.

What should the administrator do to meet this goal?

- A. Run an on-demand quick AirMatch optimization.
- B. Run an on-demand incremental AirMatch optimization.
- C. Temporarily enable ARM on the existing and new APs, while AirMatch scheduling remains enabled.
- D. Temporarily disable AirMatch scheduling, and then enable ARM on the existing and new APs.

Correct Answer: B

QUESTION 5

Refer to the exhibits. Exhibit 1

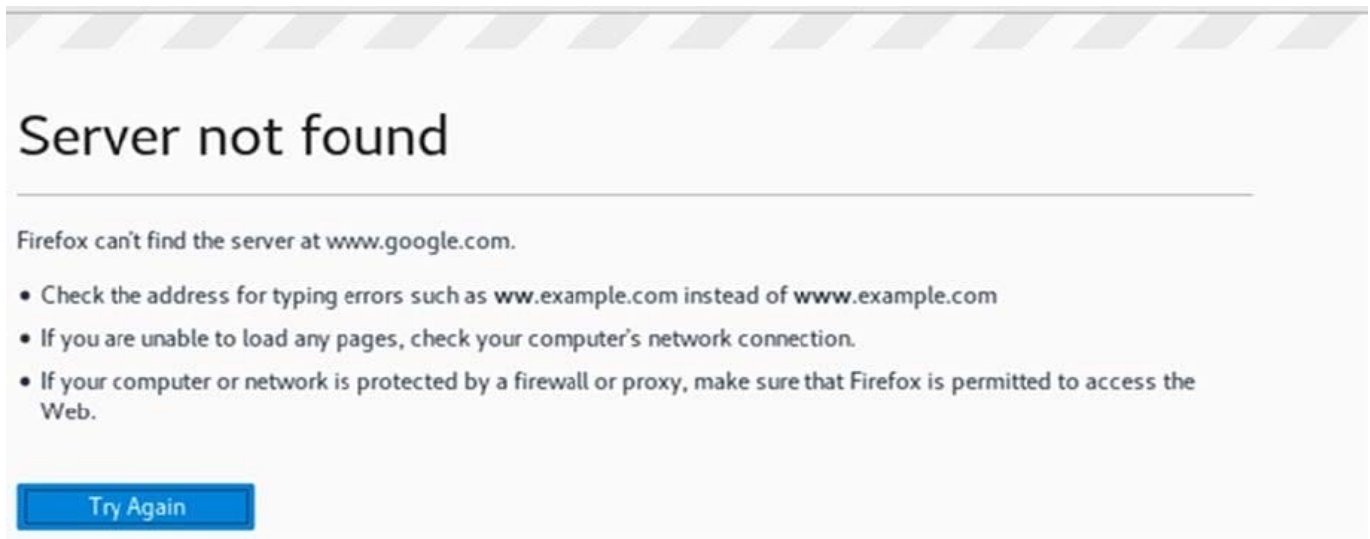


Exhibit 2

Client	Health(%)	IP Address	Band	Radio PHY	Client PHY	Device	Role	Forward Mode
d8:50:e60:f3:6e:bd	98	192.168.99.2	5GHz	VHT 80 MHz	VHT 80 MHz	Unknown	exam_g...t-logon	Tunnel

A company has a Mobility Master (MM)-based solution with a guest WLAN. Users can connect to the WLAN, but they receive the error shown browser rather than see login page. Exhibit 2 shows the status for one of the guest clients.

What is one issue that could cause the errors described?

- A. The firewall blocks DHCP traffic between the guest clients and the DHCP server.
- B. The DHCP pool for guests does not assign users a DNS server address.
- C. The MM and Mobility Controllers (MCs) have invalid certificates.

D. The Captive Portal is not enabled for the role to which these clients are assigned.

Correct Answer: B

[Latest HPE6-A42 Dumps](#)

[HPE6-A42 PDF Dumps](#)

[HPE6-A42 VCE Dumps](#)