JN0-103^{Q&As}

Junos - Associate (JNCIA-Junos)

Pass Juniper JN0-103 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.leads4pass.com/jn0-103.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

⚙ **Instant Download** After Purchase

⚙ **100% Money Back** Guarantee

⚙ **365 Days** Free Update

⚙ **800,000+** Satisfied Customers

QUESTION 1

Which command allows you to verify the syntax and consistency of your configuration without actually activating your configuration?

A. User Interfaces

B. commit verify

C. commit check

D. check commit

E. commit no-activate

Correct Answer: C

QUESTION 2

You issue the command telnet interface ge-1/1/0 10.10.10.1 source 192.168.100.1 bypass- routing.

Which statement is correct?

A. The bypass-routing parameter is ignored when using private IP addressing.

B. The telnet session will have the source IP address 10.10.10.1.

C. The telnet session will connect to the neighboring device\\'s interface ge-1/1/0.

D. Return traffic for the telnet session might not arrive at interface ge-1/1/0.

Correct Answer: D

QUESTION 3

Which layer in the OSI model is responsible for translating frames into bits?

A. Application Layer

B. Presentation Layer

C. Data Link Layer

D. Physical Layer

Correct Answer: C

QUESTION 4

```
user@router> show chassis routing-engine
Routing Engine status:
    Temperature                        0 degrees C / 32 degrees F
    CPU temperature                    0 degrees C / 32 degrees F
    Total memory                       931 MB Max 270 MB used ( 29 percent)
    Memory utilization                 28 percent
    5 sec CPU utilization:
      User                             1 percent
      Background                       0 percent
      Kernel                           1 percent
      Interrupt                        0 percent
      Idle                            98 percent
    1 min CPU utilization:
      User                             0 percent
      Background                       0 percent
      Kernel                           1 percent
      Interrupt                        0 percent
      Idle                            99 percent
    5 min CPU utilization:
      User                             0 percent
      Background                       0 percent
      Kernel                           1 percent
      Interrupt                        0 percent
      Idle                            99 percent
    15 min CPU utilization:
      User                             0 percent
      Background                       0 percent
      Kernel                           1 percent
      Interrupt                        0 percent
      Idle                            99 percent
    Model                              VSRX-S
    Serial ID                          BUILTIN
    Start time                         2020-01-16 15:21:32 UTC
    Uptime                             12 days, 4 hours, 33 minutes, 7 seconds
    Last reboot reason                 0x4000:VJUNOS reboot
```
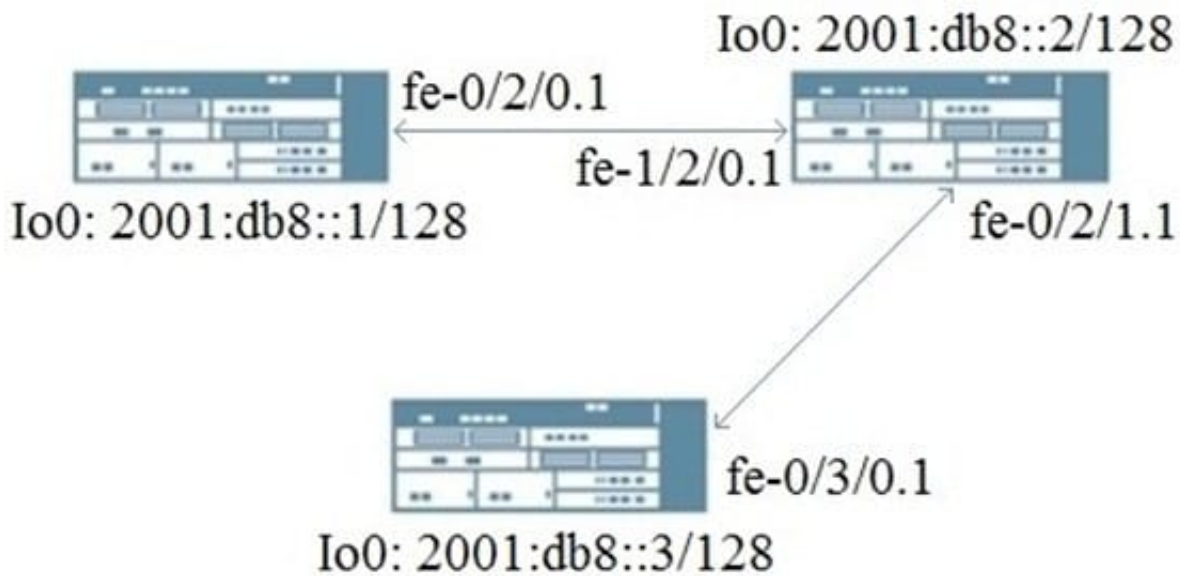
Referring to the exhibit, which two statements are correct? (Choose two.)

A. The memory utilization is 28%.

B. The memory utilization is 72%.

C. The 15 minute CPU load average is 99%.

D. The CPU kernel utilization is 1%.

Correct Answer: AD

QUESTION 5

Referring to the exhibit, which dynamic routing protocol would be used for this topology?

A. IGMPv3

B. RIPng

C. RIP

D. OSPFv2

Correct Answer: B