

JN0-450^{Q&As}

Mist AI Specialist (JNCIS-MistAI)

Pass Juniper JN0-450 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/jn0-450.html>

100% Passing Guarantee
100% Money Back Assurance


Following Questions and Answers are all new published by Juniper
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1

Referring to the exhibit, what does the security alert indicate?

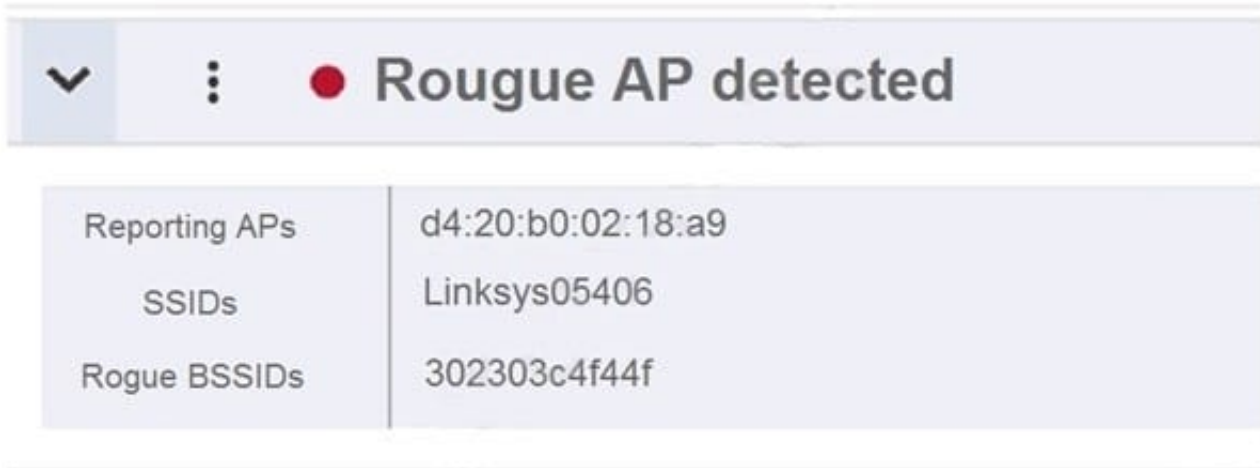

The image shows a security alert notification. At the top, there is a header bar with a downward arrow, a vertical ellipsis, a red dot, and the text "Rogue AP detected". Below this is a table with three rows of information:

Reporting APs	d4:20:b0:02:18:a9
SSIDs	Linksys05406
Rogue BSSIDs	302303c4f44f

- A. An AP that is not part of the Mist Org is connected to the same wired network as the Mist APs.
- B. An AP that is not part of the Mist Org is launching a DDoS attack on the Mist APs.
- C. An AP that is not part of the Mist Org is advertising the same SSIDs as the Mist APs.
- D. An AP that is not part of the Mist Org is operating in the same RF channel as the nearby Mist AP.

Correct Answer: A

Reference: <https://www.mist.com/documentation/rogue-neighbor-honeypot-aps/>

QUESTION 2


Which action would site-level network administrators be able to perform?

- A. create a config template
- B. modify an RF template
- C. reboot an access point
- D. assign access points to the site

Correct Answer: C

QUESTION 3

Referring to the exhibit, what are two reasons why a Mist AP would have multiple IP addresses? (Choose two.)

Status	
Status	 Connected
DHCP Server	10.10.10.1
IP Address (vlan1)	10.10.10.16/24,fe80:0:...
IP Address (vlan100)	10.10.100.22/24,fe80:...
Gateway	10.10.10.1
Primary DNS	8.8.8.8
Secondary DNS	
External IP Address	122.172.108.135
No. Clients	0
Uptime	3h
Last Seen	05:51:36 PM, Mar 27


- A. One IP address is used for control traffic and one address is used for management traffic.
- B. The Local Status Page is enabled in the site settings.
- C. One IP address is used for redundancy.
- D. A guest portal is configured on a tagged VLAN.

Correct Answer: BD

Reference: <https://www.mist.com/documentation/aps-use-ip-addresses/>

QUESTION 4

A network engineer is looking to provision a new WLAN through the REST API. Referring to the exhibit, which HTTP method should the request use to achieve this goal?

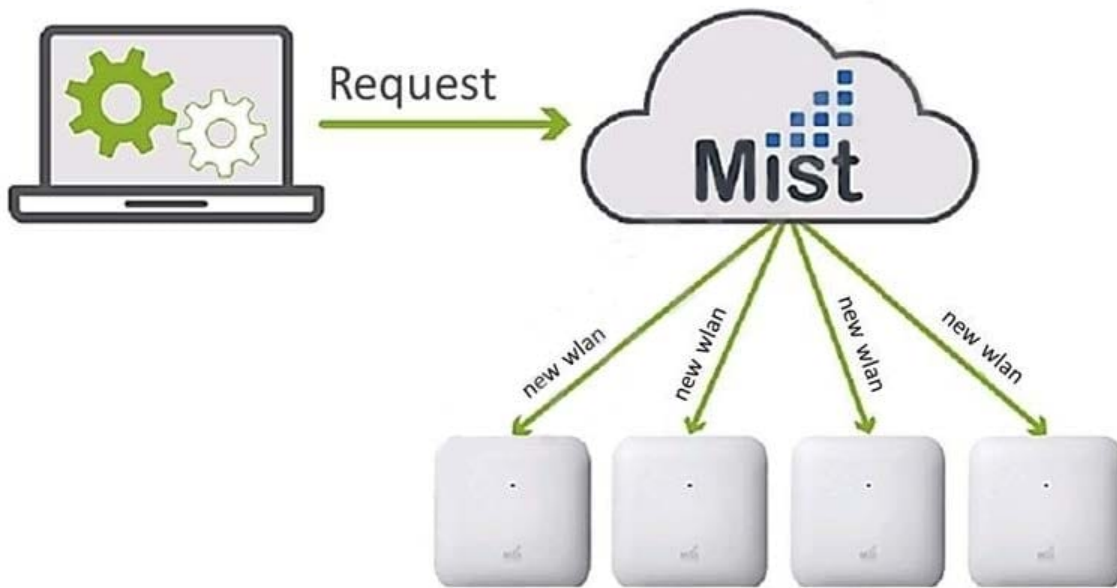

- A. POST
- B. DELETE
- C. GET
- D. PUT

Correct Answer: A

Reference: <https://www.mist.com/documentation/mist-api-introduction/>

QUESTION 5

What are two advantages of lower modulation methods? (Choose two.)

- A. Lower modulation provides higher total aggregate throughput.
- B. Lower modulation provides higher data rates.
- C. Lower modulation is more robust against signal corruption.
- D. Lower modulation can achieve greater range.

Correct Answer: CD

[JN0-450 PDF Dumps](#)

[JN0-450 VCE Dumps](#)

[JN0-450 Study Guide](#)