

JN0-647^{Q&As}

Enterprise Routing and Switching Exam

Pass Juniper JN0-647 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/jn0-647.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

You manage your company enterprises network using EX series switches. Your company wants to use Q in Q tunneling to connect remote customer sites together. Which statement is correct about the scenario?

- A. You must enable L2PT to tunnel layer 2 protocol traffic
- B. The outside layer 2 frame is popped by the penultimate switch
- C. Customer traffic is tunneled through the network using the C VLAN ID
- D. The default Ethernet value is 0x9100

Correct Answer: A

QUESTION 2

Which router ID is correct for OSFPv3?

- A. 0.0.0.0
- B. 2001:123:6::1
- C. ::172.16.1.1
- D. 172.16.1.1

Correct Answer: D

QUESTION 3

OSFP is stuck in the ExStart state.

What is a common cause of this problem?

- A. The DR priority is configured incorrectly.
- B. MTUs do not match.
- C. IP addresses are not configured correctly.
- D. Jumbo frames are not enabled.

Correct Answer: B

QUESTION 4


What allows non-Web enabled devices to access the network on a port configured for captive portal?

- A. A MAC address white list can be configured on the switch to allow specific MAC addresses to bypass the captive portal process.
- B. LLDP can be used to query the type of device that is attempting to access the network, and predefined device types can be allowed to bypass the captive portal process.
- C. Captive portal can be configured to only prompt for credentials when HTTP or HTTPS traffic is requested on a port to allow on-HTTP enabled devices access to the network.
- D. Authentication credentials for specific devices can be preconfigured on the switch for automatic authentication.

Correct Answer: A

QUESTION 5

Click the Exhibit button.

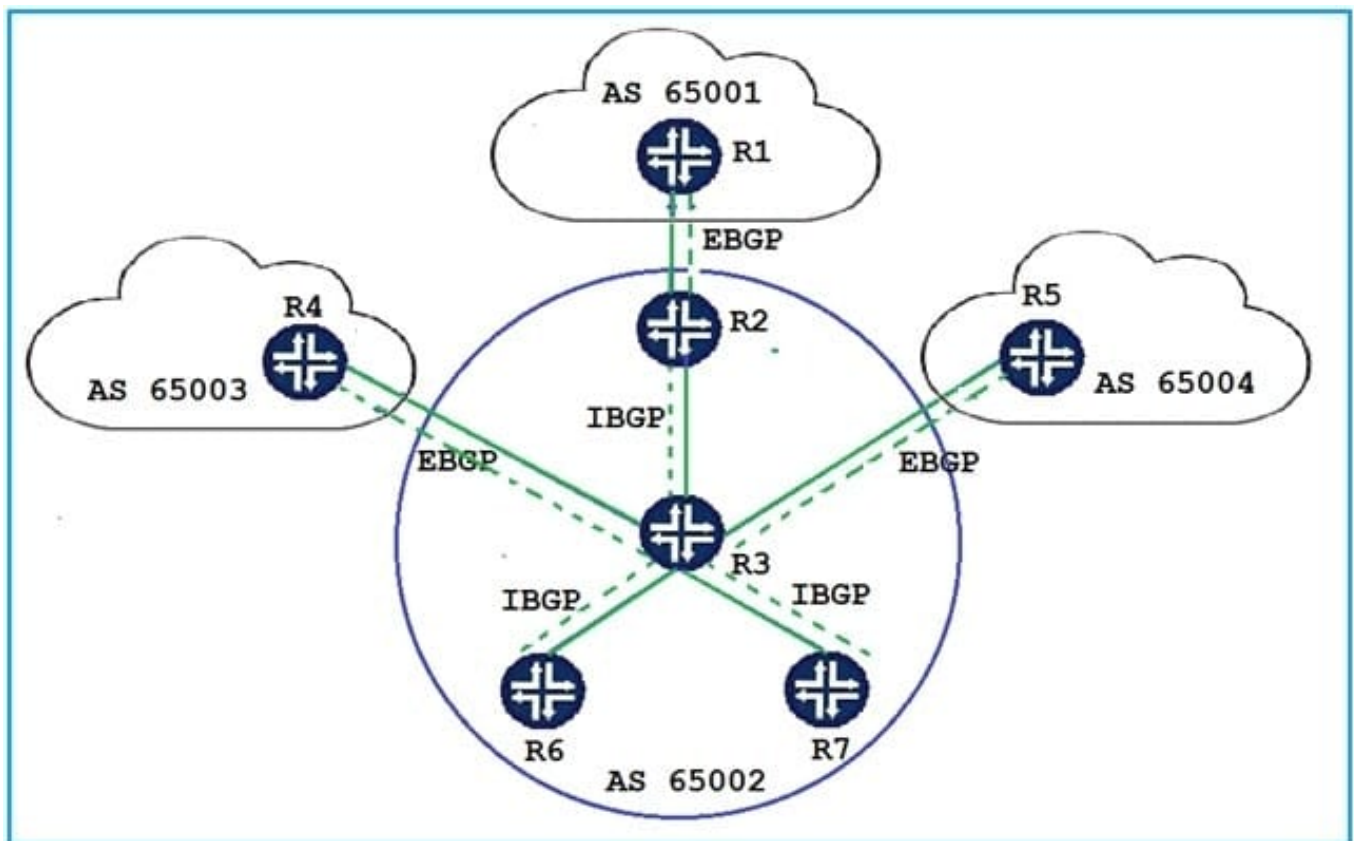

Router1, in peer AS 65001, advertises routes to R2 using EBGP. R2 advertises the routes learned from R1 to R3 using IBGP. R3 is configured as a route reflector with routers R6 and R7 as clients.

Referring to the exhibit, to which routers will R3 advertise the BGP routes received from R2?

- A. R6, R7
- B. R4, R5
- C. R2, R4, R5, R6, R7

D. R4, R5, R6, R7

Correct Answer: D

[Latest JN0-647 Dumps](#)

[JN0-647 PDF Dumps](#)

[JN0-647 Practice Test](#)