

JN0-692^{Q&As}

Service Provider Routing and Switching Support, Professional

Pass Juniper JN0-692 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/jn0-692.html>

100% Passing Guarantee
100% Money Back Assurance


Following Questions and Answers are all new published by Juniper
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

Click the Exhibit button.

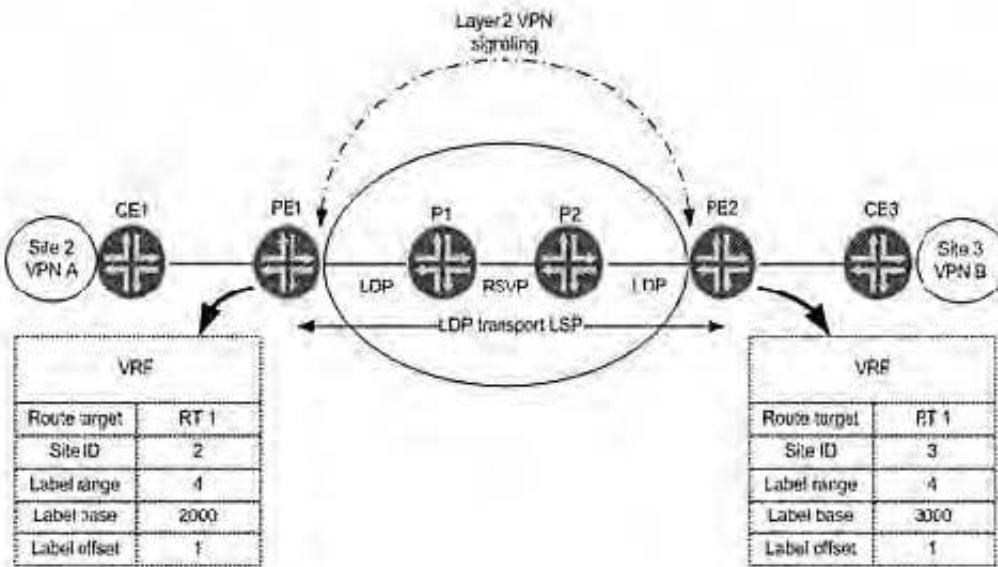

In the exhibit, on which label value does PE1 expect to receive traffic from CE3 for VPN A?

- A. 2002
- B. 3001
- C. 3002
- D. 2001

Correct Answer: A

QUESTION 2

Click the Exhibit button.

```
[edit protocols mpls]

user@Eoston# show

label-switched-path Boston-to-Seattle {
    to 192.168.10.100;
    bandwidth 6g;
    priority 5 4;
}

label-switched-path Boston-to-Denver {
    to 192.168.10.200;
    bandwidth 6g;
    priority 4 4;
}

...
```

A network administrator has configured the LSPs shown in the exhibit on the ingress router of a 10-Gigabit Ethernet network

Which statement is true?

- A. Both LSPs will establish and remain established.
- B. The Boston-to-Denver LSP will establish and remain established.
- C. The Boston-to-Seattle LSP will establish and remain established.
- D. Neither LSP will remain established.

Correct Answer: B

QUESTION 3

An LDP Layer 2 circuit is configured for VPN A and VPN B. Which three statements are true regarding LDP Layer 2 circuit signaling? (Choose three.)

- A. PE-P LDP sessions use Martini encapsulation.
- B. PE-PE LDP sessions can be extended or adjacent.

- C. VRF tables are needed on the PEs.
- D. TCC encapsulation is needed to interconnect different interface types.
- E. The VC type field in the LDP header specifies the encapsulation type.

Correct Answer: BDE

QUESTION 4

Click the Exhibit button.

```

user@router> show route table inet.0 protocol ospf
inet.0: 17 destinations, 17 routes (17 active, 0 holddown, 0 hidden)
+ = Active Route, - = Last Active, * = Both
224.0.0.5/32      * [OSPF/10] 1w2d 21:43:55, metric 1
                  MultiRecv

user@router> show ospf database
OSPF database, Area 0.0.0.0
Type            ID                Adv Rtr           Seq              Age  Opt  Cksum  Len
Router         67.176.255.1      67.176.255.1     0x80000176      1138 0x22 0x3f8e 48
Router         67.176.255.2      67.176.255.2     0x80000151      1131 0x22 0xa349 48
Router         *67.176.255.3     67.176.255.3     0x80000152      1137 0x22 0xa733 72
Router         67.176.255.4      67.176.255.4     0x80000167      1138 0x22 0x9937 48
Network       67.176.10.2       67.176.255.1     0x80000007      1138 0x22 0x7ae2 40
OSPF AS SCOPE link state database
Type            ID                Adv Rtr           Seq              Age  Opt  Cksum  Len
Extern         10.128.0.0        67.176.255.2     0x8000013a      2118 0x22 0xda22 36
Extern         10.128.55.32     67.176.255.2     0x8000013a      1624 0x22 0xe1f 36
Extern         10.128.128.0     67.176.255.2     0x8000013a      628 0x22 0xd5a6 36
Extern         10.128.128.32   67.176.255.2     0x8000013a      127 0x22 0xe7fb 36

user@router> show ospf neighbor
Address          Interface          State  ID                Pri  Dead
67.176.10.5     ge-0/0/8.0        Full   67.176.255.4     128  37
67.176.10.2     ge-0/0/8.0        Full   67.176.255.1     128  39
67.176.10.3     ge-0/0/8.0        ExStart 67.176.255.2     1    36

user@router> show ospf interface ge-0/0/8.0 extensive
Interface        State  Area  DR ID            BDR ID            Nbrs
ge-0/0/8.0      PtToPt 0.0.0.0  0.0.0.0         0.0.0.0           3
Type: P2MP, Address: 67.176.10.4, Mask: 255.255.255.0, MTU: 1500, Cost: 1
Adj count: 2
Hello: 10, Dead: 40, ReXmit: 5, Not Stub
Auth type: None
Protection type: None
Topology default (ID 0) -> Cost: 1

```

Based on the exhibit, why is the router not installing routes in the OSPF database into the routing table?

- A. The neighbor is stuck in the ExStart state
- B. The routes are going to a different table than inet.0

C. There is an interface type mismatch

D. There is an MTU mismatch

Correct Answer: C

QUESTION 5

Click the Exhibit button.

```
user@router# run show class-of-service rewrite-rule name traffic-class
Rewrite rule: traffic-class, Code point type: exp, Index: 58855
  Forwarding class      Loss priority  Code point
  best-effort           low           000
  best-effort           high          001
  expedited-forwarding low           111
  expedited-forwarding high          011
  assured-forwarding   low           100
  assured-forwarding   high          101
  network-control      low           110
  network-control      high          111
```

Your router should be configured with a rewrite rule which alters the default behavior of expedited-forwarding as shown in the exhibit. Which configuration is correct?

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: A

[Latest JN0-692 Dumps](#)

[JN0-692 Study Guide](#)

[JN0-692 Exam Questions](#)