

# NS0-161<sup>Q&As</sup>

NetApp Certified Data Administrator, ONTAP

## Pass NetApp NS0-161 Exam with 100% Guarantee

Free Download Real Questions & Answers PDF and VCE file from:

https://www.leads4pass.com/ns0-161.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by NetApp
Official Exam Center

- Instant Download After Purchase
- 100% Money Back Guarantee
- 365 Days Free Update
- 800,000+ Satisfied Customers





#### **QUESTION 1**

Click the Exhibit button.

| FC Ports          | v -a                    | 100                     |  |
|-------------------|-------------------------|-------------------------|--|
| Node              | 2a                      | 2b                      |  |
| ^ tme-a700-01     |                         |                         |  |
|                   | 32 Gb/s                 | 32 Gb/s                 |  |
| WWPN              | 50:0a:09:81:80:d2:c3:b8 | 50:0a:09:82:80:d2:c3:b8 |  |
| Network Interface | 1                       | 1                       |  |
| Data Link Rate    | 32 Gb/s                 | 16 Gb/s                 |  |
| Port Address      | b1200                   | a1200                   |  |
| Protocol          | FC,NVMe                 | FC,NVMe                 |  |
| ^ tme-a700-0      | 2                       |                         |  |
|                   | 32 Gb/s                 | 32 Gb/s                 |  |
| WWPN              | 50:0a:09:81:80:42:c2:b9 | 50:0a:09:82:80:42:c2:b9 |  |
| Network Interface | 1                       | 1                       |  |
| Data Link Rate    | 32 Gb/s                 | 16 Gb/s                 |  |
| Port Address      | b1100                   | a1100                   |  |

Referring to the exhibit, a customer is experiencing performance problems on an SVM supporting NVMe/ FC. You review the physical FC ports that are connected into the 32 Gbps switches for cluster tme-a700.

In this scenario, what is causing the performance problems? (Choose the best answer.)

- A. Port 2a needs more network interfaces added to the physical port.
- B. Port 2b has a 16 Gbps SFP+ installed.
- C. Port 2a needs a 16 Gbps SFP+ installed.
- D. Port 2b has two many LIFs running across the physical port.

Correct Answer: A

#### **QUESTION 2**

Click the Exhibit button.



clus01::> fcp interface show (vserver fcp interface show)

| svm01 fc | -       | WWPN          | Node       | Port        | Home   |
|----------|---------|---------------|------------|-------------|--------|
| SVMUI    | 1 up/up | 20:01:00:a0:9 | 8:87:b6:ce | clus01-01 0 | c true |
| svm01 fc | 2 up/up | 20:02:00:a0:9 | 8:87:b6:ce | clus01-02 0 | d true |

clus01::> fcp adapter show -fields fc-wwpn. node, fc-wwnn (network fcp adapter show)

| node      | adapter | fc-wwnn                 | fc-wwpn                 |
|-----------|---------|-------------------------|-------------------------|
|           |         |                         |                         |
| clus01-01 | 0c      | 50:0a:09:80:80:31:06:da | 50:0a:09:81:80:31:06:da |
| clus01-02 | 0d      | 50:0a:09:80:80:11:0d:bb | 50:0a:09:81:80:11:0d:bb |

2 entries were displayed.

clus01::>

You are planning to present storage to your servers from your AFF system using FC protocol. You have a pair of FC switches to ensure connectivity and you have decided to use WWPN zoning.

Referring to the exhibit, which two WWPNs do you use for your configuration? (Choose two.)

A. fc-2 WWPN

B. fc-1 WWPN

C. 0d WWPN


D. 0c WWPN

Correct Answer: AB

#### **QUESTION 3**

Click the Exhibit button.



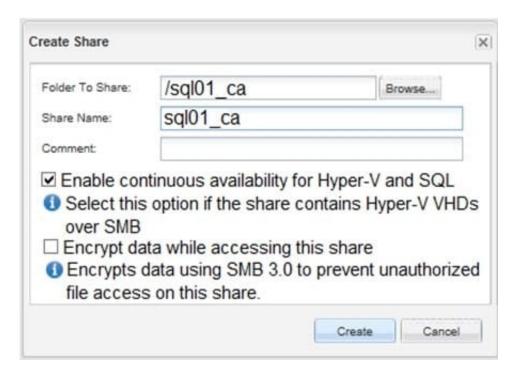

You have a mission-critical SQL application that uses a single SMB 3.1.1 share to host its database. The storage node that is hosting the SMB share sql01\_ca for the SQL database experiences a hardware failure and fails over to the surviving node.

Referring to the exhibit, what is the state of the SMB share for the SQL database during the failover? (Choose the best answer.)

- A. The SMB share will be available, but all data is corrupted.
- B. The SMB share will be unavailable until node failback.
- C. The SMB share will be available, and all data is accessible.
- D. The SMB share is unavailable due to its stateful nature.


Correct Answer: A

#### **QUESTION 4**

You are asked to separate replication and data traffic into their own individual VLANs. You created two new VLANs and need to create logical interfaces (LIFs).

In this scenario, what must you do before creating the LIFs? (Choose the best answer.)

- A. Create a firewall policy.
- B. Create an interface group.
- C. Create a network subnet.
- D. Create a broadcast domain.



Correct Answer: B

### **QUESTION 5**

What are three supported fabric-attached MetroCluster solutions? (Choose three.)

A. a four-node solution

B. a two-node solution

C. an eight-node solution

D. a two-node direct-attached solution

E. a two-node bridge-attached solution

Correct Answer: ABC

Reference: https://www.netapp.com/pdf.html?item=/media/13482-tr4375pdf.pdf

NS0-161 PDF Dumps

NS0-161 VCE Dumps

NS0-161 Exam Questions