

NS0-502^{Q&As}

NetApp Certified Implementation Engineer-SAN and Virtualization

Pass Network Appliance NS0-502 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/ns0-502.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Network Appliance Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

During an equipment move a Fibre Channel cable from a host to a switch is accidentally plugged into a different switch port on the FC switch. However, the host still sees the storage devices on all its paths.


What are two reasons why this is possible? (Choose two.)

- A. LUN masking uses switch port numbers and not WWPNs.
- B. The host HBA WWPN is a part of a WWPN zoning scheme.
- C. The Fibre Channel address for the HBA has not changed.
- D. The WWPN Alias was n changed on the NetApp Controllers.

Correct Answer: BD

QUESTION 2

Click the Exhibit button.

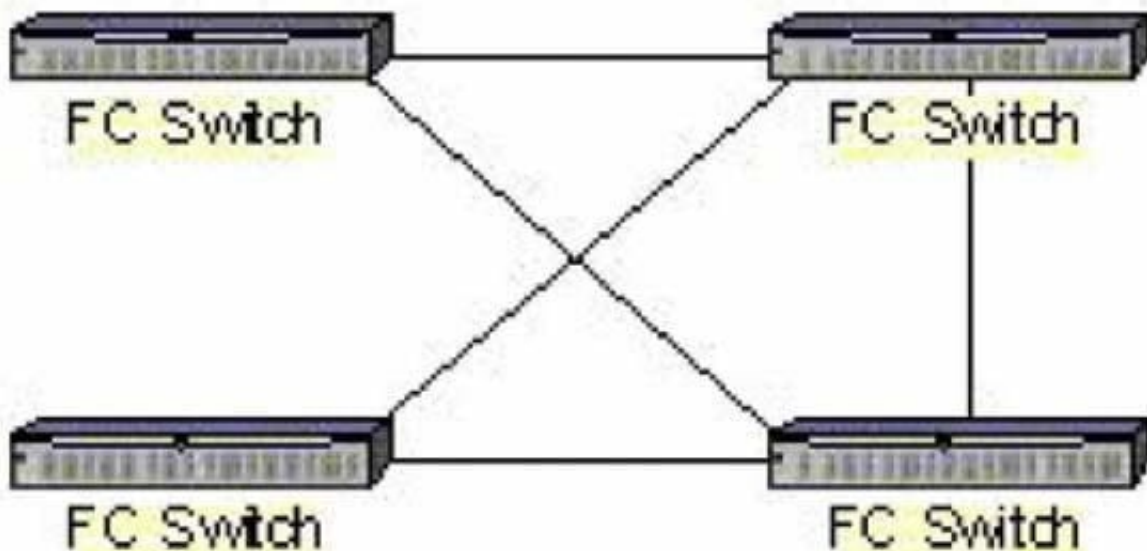

Based on the diagram shown, what is the appropriate FC switch topology?

- A. core-edge
- B. full mesh
- C. partial mesh

D. partial cascade

Correct Answer: C

QUESTION 3

A user wants to access a FCP VMFS datastore created on a NetApp LUN using a properly configured ESX 3.5 system with a new ESX 4.0 system. Without making changes to the LUN or igroup attributes, what setting should be used for the SATP (Storage Array Type Plugin)?

A. VM_SATP_ALUA

B. VMW_SATP_DEFAULT_AA

C. The LUN has to be changed to ALUA before accessing from ESX 4.0)

D. VM_SATP_DEFAULT

Correct Answer: B

QUESTION 4

Which three steps are required to make a LUN visible to a NPIV-supported VM? (Choose three.)

A. Map a LUN to the igroup containing the NPIV WWPNs.

B. Configure a matching NPIV port on the NetApp controller.

C. Set options.npiv.enable to TRUE on the NetApp controller.

D. Create a zone containing NetApp target ports and NPIV WWPNs.

E. Create an igroup on the NetApp controller containing the NPIV WWPNs.

Correct Answer: ADE

QUESTION 5

In a NetApp SAN solution, which value should you set for snap reserve for a volume holding LUNs?

A. 100%

B. 50%

C. 20%

D. 0%

Correct Answer: D

[Latest NS0-502 Dumps](#)

[NS0-502 PDF Dumps](#)

[NS0-502 VCE Dumps](#)