

PW0-105^{Q&As}

Certified Wireless Network Administrator (CWNA)

Pass EC-COUNCIL PW0-105 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/pw0-105.html>

100% Passing Guarantee
100% Money Back Assurance


Following Questions and Answers are all new published by EC-COUNCIL Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

Using the exhibit as a reference, what is the maximum number of spatial streams that could be used for a downlink HT-OFDM transmission from AP-1 to STA-3?

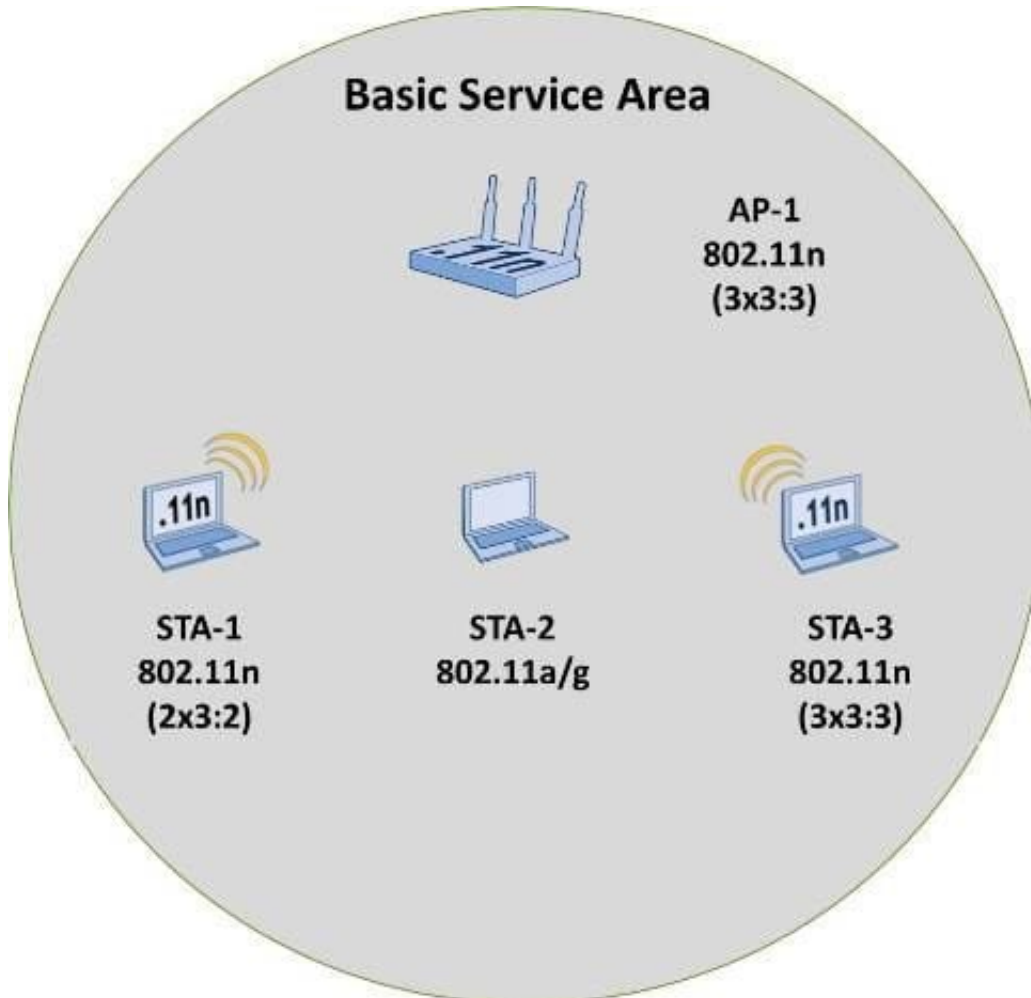

- A. One spatial stream, because the BSS must maintain backwards compatibility with STA-2, which supports only 802.11g (ERP) without MIMO or multiple spatial streams.
- B. Two spatial streams, because the number of spatial streams for an HT-OFDM transmission is limited to the capabilities of the least capable HT station in the BSS.
- C. Two spatial streams, because the third transmit chain in the HT AP must be used simultaneously for protection mechanisms with the 802.11g (ERP) station.
- D. Three spatial streams, because HT-OFDM transmissions will be preceded with protection mechanisms using a basic data rate for STA-2 and possibly STA-1.

Correct Answer: D

QUESTION 2

What statements describe industry practices for communication protocols between WLAN controllers and controller-based APs? (Choose two)

- A. All vendors use the same protocol so that APs will interoperate with WLAN controllers from other vendors.
- B. Some vendors use proprietary protocols, and some vendors use protocols based on public standards like RFCs.
- C. For most vendors, the controller-based APs maintain data and control tunnels with at least two controllers for immediate failover and redundancy.
- D. All vendors support at least one L2 or L3 broadcast protocol for controller discovery by controller-based APs.
- E. All vendors recommend using L2 (instead of L3) controller discovery and tunneling protocols in large enterprises.

Correct Answer: BD

QUESTION 3

What item is essential for performing a manual RF site survey for a warehouse facility?

- A. A facility map with an explanation of applications used in each area
- B. I-Beam mounting kits for hanging temporary access points
- C. High-gain omni antennas for APs mounted high on warehouse ceilings
- D. Predictive site survey software that supports directional antennas
- E. NEMA enclosures that protect APs used for the survey

Correct Answer: A

QUESTION 4

Which unit of measurement is a relative unit that is used to quantify power level changes?

- A. dBm
- B. dBW
- C. dB
- D. mW
- E. VSWR

Correct Answer: C

QUESTION 5

What feature(s) are most likely to be supported by 802.11 enterprise-class WLAN controllers? (Choose 4)

- A. Link aggregation / port trunking
- B. 802.1p and DSCP QoS
- C. BGP and Frame Relay
- D. Captive web portals
- E. IGMP snooping

Correct Answer: ABDE

[PW0-105 PDF Dumps](#)

[PW0-105 Practice Test](#)

[PW0-105 Braindumps](#)