

## DES-4122<sup>Q&As</sup>

Specialist - Implementation Engineer PowerEdge Version 2.0

**Pass EMC DES-4122 Exam with 100% Guarantee**

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/des-4122.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by EMC  
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

You must configure a BOSS card with 2 x 120GB drives for a Dell EMC PowerEdge server. What is the only supported mode?

- A. RAID 0
- B. RAID 5
- C. RAID 1
- D. Non-RAID Mirroring


Correct Answer: A

---

**QUESTION 2**

An engineer is checking a newly delivered Dell EMC PowerEdge R640 server that will be deployed for a new database environment

The inventory consists of:

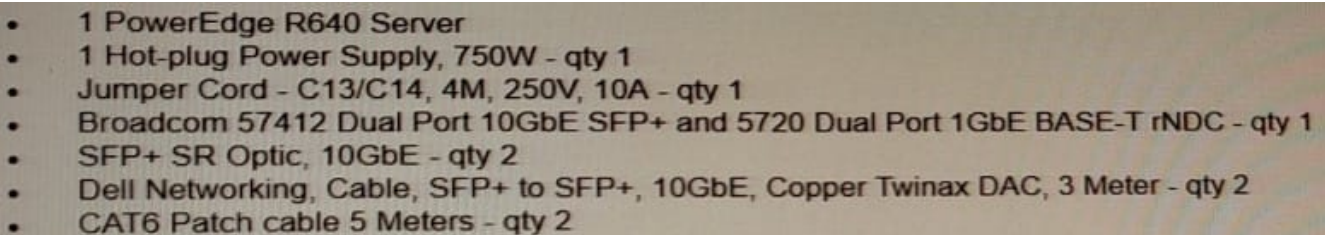- 
- 1 PowerEdge R640 Server
  - 1 Hot-plug Power Supply, 750W - qty 1
  - Jumper Cord - C13/C14, 4M, 250V, 10A - qty 1
  - Broadcom 57412 Dual Port 10GbE SFP+ and 5720 Dual Port 1GbE BASE-T rNDC - qty 1
  - SFP+ SR Optic, 10GbE - qty 2
  - Dell Networking, Cable, SFP+ to SFP+, 10GbE, Copper Twinax DAC, 3 Meter - qty 2
  - CAT6 Patch cable 5 Meters - qty 2

The server power configuration will be set for gnd redundancy The management switch is 1000 Base-T and the top of rack switches 10Gb

What additional component(s) is needed for this configuration?

- A. Hot-plug power supply, 750 W - qty 1
- B. Hot-plug power supply, 1100W - qty 1
- C. Dell Networking, cable, 40GbE (QSFP+) to 4 x 10GbE SFP+ passive copper breakout cable, 3 meters - qty 2
- D. C20 to C21, PDU style, 250 V, 16 Amp, 3 5 meters power cord - qty 2

Correct Answer: D

---

**QUESTION 3**

What is the purpose of the Silicon-Based Hardware Root of Trust feature in Dell EMC PowerEdge 14G servers?

- A. Ensures that the installed operating system is authentic

- B. Ensures that the server has a valid Service Tag number
- C. Ensures that no unauthorized BIOS or firmware codes are run
- D. Ensures that the server boots only when connected to a verified network

Correct Answer: C

---

**QUESTION 4**

A technician is creating a virtual disk in the iDRAC (2x 4 TB NL-SAS in RAID 1) to install Windows 2016 They manually boot to the OS installation media without using the Lifecycle Controller OS Deployment wizard Only the first 2048 GB on the virtual disk can be partitioned

How should the technician obtain access to the remaining 2 TB (approximately) of storage?

- A. Use the Lifecycle Controller OS Deployment Wizard to deploy the OS on this server
- B. Delete the 4 TB virtual disk and create a virtual (boot) disk no larger than 2048 GB
- C. Upgrade to a newer version of the operating system
- D. Use F2 to go into the BIOS, change the BIOS boot mode to UEFI, and try again

Correct Answer: C

---

**QUESTION 5**

After completing a disk rebuild operation, a technician needs to configure the system so that the rebuild process happens faster the expense of slowing users down.

Which setting should be changed?

- A. Rebuild Rate in the BIOS settings
- B. System Profile to Performance in the BIOS settings
- C. System Profile to Performance in the iDRAC GUI
- D. Rebuild Rate in the iDRAC GUI


Correct Answer: D

---

**QUESTION 6**

CORRECT TEXT

You are Investigating a disk error on a Dell EMC PowerEdge server and discover a Hot Spare has not been assigned to the Virtual Disk Group. Use the simulator to assign the Global Hot Spare. When you have finished using the simulator, dick Next.

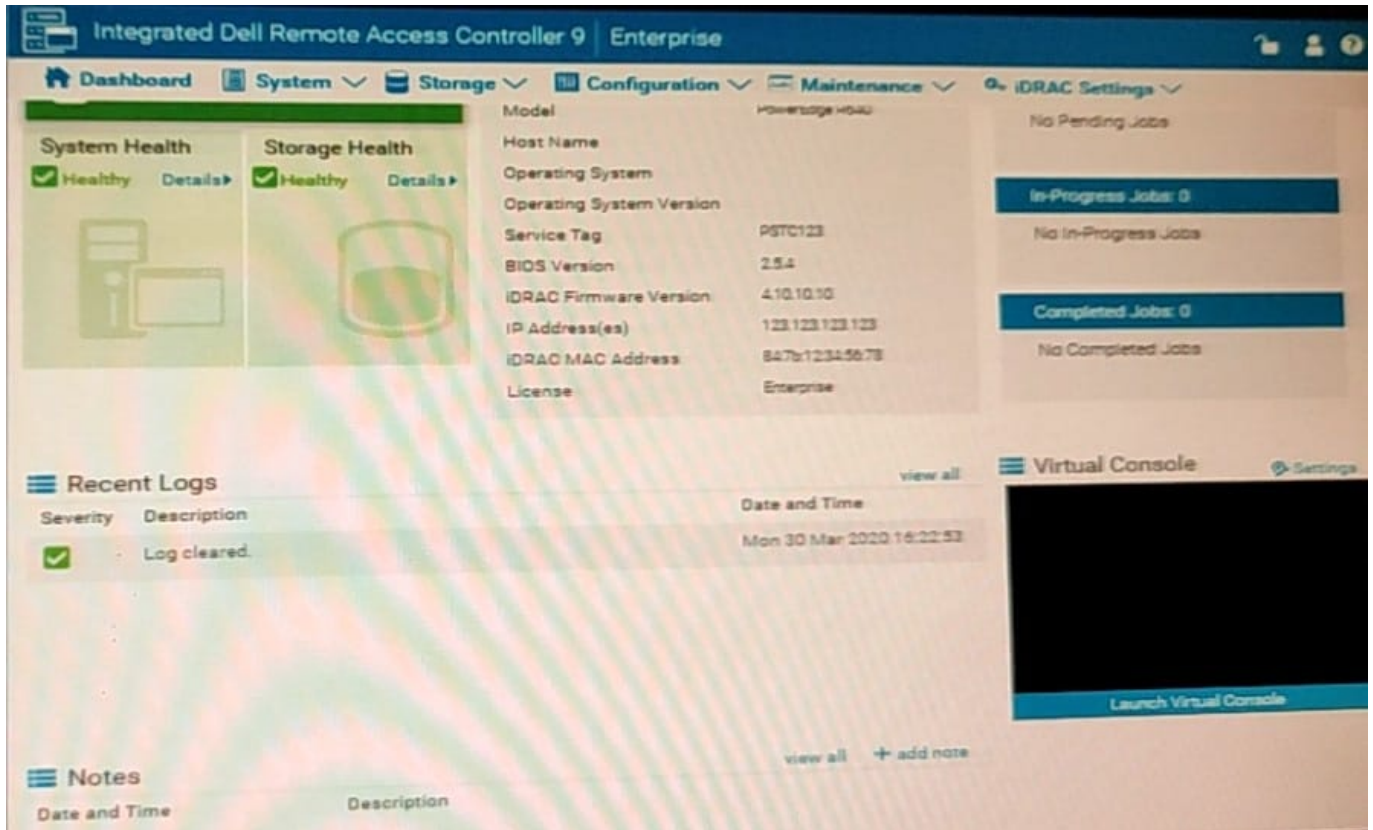

- A. No answer
- B. Place Holder
- C. Place Holder
- D. Place Holder

Correct Answer: A

## QUESTION 7

What is a characteristic of out-of-band management?

- A. Dedicated device
- B. Agent based
- C. Less secure
- D. Dependent upon OS

Correct Answer: A

## QUESTION 8

Where is the data stored to allow Easy Restore to successfully complete a system board replacement?

- A. NAND Flash module on the disk drive mid plane
- B. IDSDM SD card
- C. vFlash SD card
- D. Serial Flash storage in the server's front panel

Correct Answer: C

---

## QUESTION 9

What is a key feature introduced in OpenManage Mobile v2.0?

- A. Access servers remotely through OME
- B. Access SupportAssist reports
- C. Access a Virtual Console (VNC over SSH) securely
- D. Access iDRAC remotely

Correct Answer: B

---

## QUESTION 10

What can be done using in-band management?

- A. Agentless discovery
- B. Firmware and driver updates
- C. Network bandwidth optimization
- D. Remote access

Correct Answer: C

[Latest DES-4122 Dumps](#)

[DES-4122 Practice Test](#)

[DES-4122 Exam Questions](#)