

# E20-377<sup>Q&As</sup>

RecoverPoint/SE Specialist Exam for Implementation Engineers

## Pass EMC E20-377 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/e20-377.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by EMC  
Official Exam Center

- ⚙ **Instant Download** After Purchase
- ⚙ **100% Money Back** Guarantee
- ⚙ **365 Days** Free Update
- ⚙ **800,000+** Satisfied Customers



## QUESTION 1

When an unconfigured device has to be added to a V-Max, which locks are placed?

- A. Configuration and back-end
- B. Configuration and front-end device
- C. Director and back-end
- D. Front-end device and back-end device

Correct Answer: A

---

## QUESTION 2

- A. SRDF/A will drop
- B. Devices will go into Synchronous mode
- C. Cycle time will be elongated.
- D. Devices will go into Partitioned state.

Correct Answer: C

---

## QUESTION 3

What is required to ensure the integrity of data on the R2 volume during a SRDF fallback operation?

- A. Remove entries from the file system table
- B. Stop any applications that are accessing the R2 volume
- C. Disable journaling on the file system
- D. Suspend the RDF link

Correct Answer: B

---

## QUESTION 4

What is another possible scheme for RAID 6 for a Symmetric V-max besides 6+2?

- A. 7+2
- B. 14+2
- C. 3+2

D. 8+2

Correct Answer: B

---

## QUESTION 5

Which command is used to set or reset HBA port flags on Symmetric arrays running Enable 7.0 Enginuity 5874?

A. symcfg

B. symmask

C. symconfigure

D. symaccess

Correct Answer: D

---

## QUESTION 6

Which device types are used when using SMC to create devices for virtual Provisioning?

A. Thin and Save

B. Data and Save

C. Standard and thin

D. Thin and Data

Correct Answer: D

---

## QUESTION 7

Which replication product can be used to create point-in-Time copies of thin devices to other thin devices?

A. SRDF/DM

B. TimeFinder/Clone

C. SRDF/AR

D. TimeFinder/Mirror

Correct Answer: B

---

## QUESTION 8

A customer using Symmetrix Virtual Provisioning reports their thin pool has reached 50% utilization. At which utilization

level would you recommend adding more capacity to the thin pool?

- A. 80%
- B. 50%
- C. 70%
- D. 60%

Correct Answer: D

---

## QUESTION 9

With the DMX-3 and DMX4, where is the VCM database stored?

- A. Symmetrix Logical Volume
- B. Symmetrix File System
- C. Symmetrix Virtual Device
- D. Symmetrix VCM Device

Correct Answer: B

---

## QUESTION 10

What is the maximum number of HBAs that can access a Symmetrix V-Max array FA port concurrently?

- A. 256
- B. 512
- C. 128
- D. 1,024

Correct Answer: A

---

## QUESTION 11

What is the maximum number of TimeFinder/Snap sessions that can be created from a single source?

- A. 128
- B. 8
- C. 32
- D. 15

Correct Answer: A

---

## QUESTION 12

In symmetric V-max series array running Enginuity 5874, which device is used as a pass-through device for Auto provisioning?

- A. VDEV
- B. VCM
- C. ACLX
- D. SFS

Correct Answer: C

---

## QUESTION 13

What is the advisable met structure in a Virtual Provisioning environment?

- A. Concatenated
- B. Striped
- C. Serial
- D. None

Correct Answer: A

---

## QUESTION 14

How does TimeFinder emulation mode convert commands?

- A. Mirror commands are converted to Clone commands
- B. Snap commands are converted to Mirror commands
- C. Mirror commands are converted to Snap commands
- D. Clone commands are converted to Mirror commands


Correct Answer: B

---

## QUESTION 15

Refer to the exhibit

What is the correct state for the Standard and RI-BCV prior to issuing a symreplicate start command?

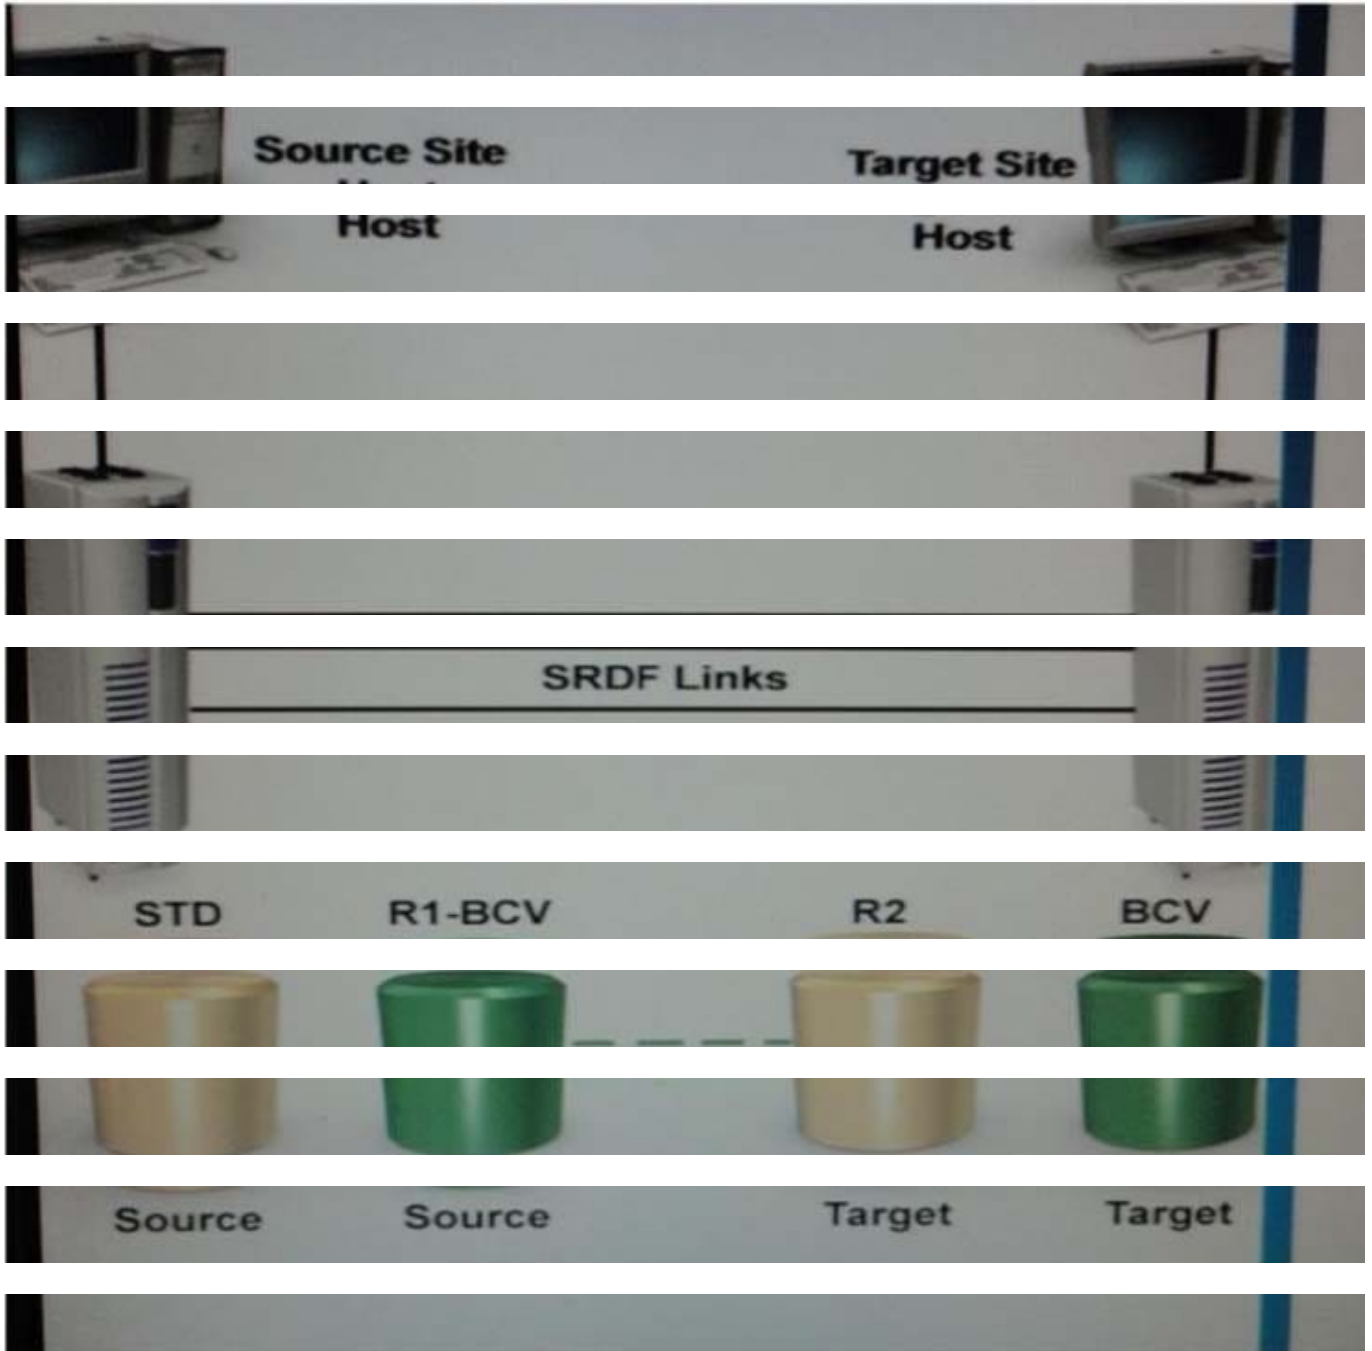

- A. Synchronized
- B. Suspended
- C. Split
- D. Write-Enable

Correct Answer: C

[Latest E20-377 Dumps](#)

[E20-377 Study Guide](#)

[E20-377 Braindumps](#)