

HPE6-A75^{Q&As}

Aruba Certified Edge Professional Exam

Pass HP HPE6-A75 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/hpe6-a75.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

What must an OSPF router do when it receives a link state update?

- A. It must participate in a new election for the Designated Router and Backup DR.
- B. It must initiate a graceful restart timer.
- C. It must re-establish adjacency with its Designated Router and Backup DR.
- D. It must run the shortest path first algorithm.

Correct Answer: D

QUESTION 2

An administrator deploys Aruba Mobility Controller 7005s to a company's branch offices. The administrator wants to disable the console port to prevent unauthorized access to the controllers.

Which controller command should the administrator use to implement this policy?

- A. no console enable
- B. no mgmt-user console
- C. mgmt-user console-block
- D. console disable

Correct Answer: C

QUESTION 3

When is it necessary to use an SNMP based Enforcement profile to send a VIAN?

- A. When we have to assign a vlan to a wired user on a third party wired switch that doesn't support RADIUS return attributes.
- B. When we have to assign a VLAN to a wired user on an Aruba Mobility Access Switch.
- C. When we have to assign a VIAN to a wired user on an Aruba Mobility Controller.
- D. When we have to assign a VLAN to a wired user on a third party wired switch that doesn't support RADIUS authentication.
- E. When we have to assign a VLAN to a wireless user on an Aruba Mobility Controller.

Correct Answer: B

QUESTION 4

Refer to the exhibit.

Exhibit 1

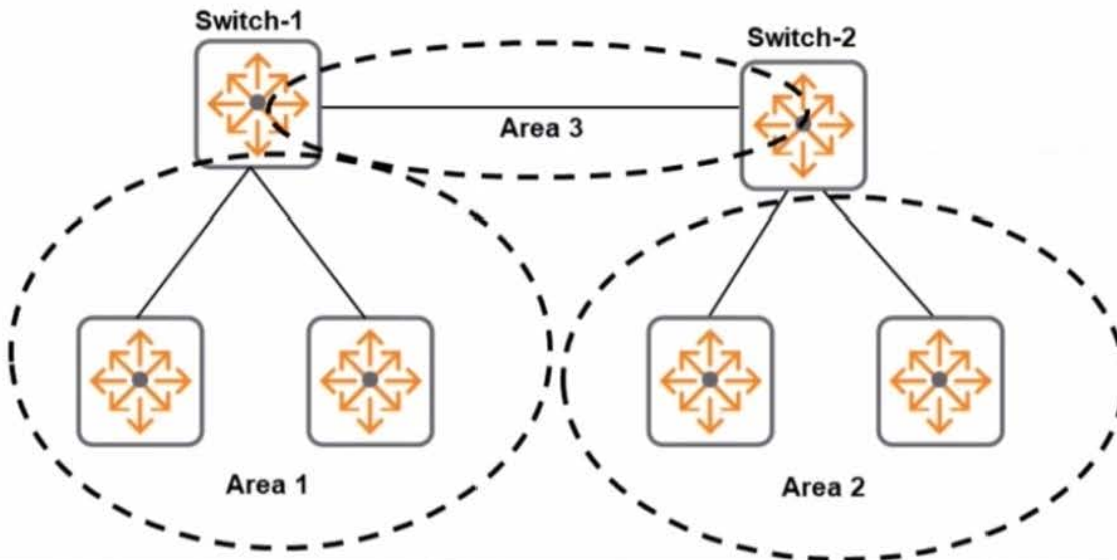


Exhibit 2

Switch-1 partial running config

```
vlan 100
 ip address 10.3.0.1 255.255.255.252
 ip ospf area 0.0.0.3
#
router ospf
 area 0.0.0.1
 area 0.0.0.2
 area 0.0.0.3
 area 0.0.0.1 range 10.1.0.0 255.255.0.0 type summary cost 1
```

Switch-2 router ospf config

```
vlan 100
 ip address 10.3.0.2 255.255.255.252
 ip ospf area 0.0.0.3
#
router ospf
 area 0.0.0.1
 area 0.0.0.2
 area 0.0.0.3
 area 0.0.0.2 range 10.2.0.0 255.255.0.0 type summary cost 1
```

A company has attempted to implement OSPF without success. The devices in Area 1 need to be able to reach Area 2. Routes should be aggregated for advertisement in other areas. What must be changed to meet these requirements?

- A. Change Area 3 to Area 0; remove Area 1 from Switch-2 and Area 2 from Switch-1.
- B. Add the 10.2.0.0/16 range on Swtch-1 and the 10.1.0.0/16 range on Switch-2.
- C. Add Area 1 and Area 2 on VIAN 100 on both Switch-1 and Switch-2. Remove Area 3.
- D. Move the 10.1.0.0/16 range to Area 2 on Switch-1 and the 10.2.0.0/16rangetoArea 1 onSwitch-2.

Correct Answer: A

QUESTION 5

Refer to the exhibit.

Configuration » Enforcement » Policies » Edit - Vlan enforcement

Enforcement Policies - Vlan enforcement

Summary	Enforcement	Rules
Enforcement:		
Name:	Vlan enforcement	
Description:		
Enforcement Type:	RADIUS	
Default Profile:	Internet VLAN	
Rules:		
Rules Evaluation Algorithm:	First applicable	
Conditions	Actions	
1. (Tips:Role EQUALS Engineer) AND (Date:Day-of-Week BELONGS_TO Monday, Tuesday, Wednesday, Thursday, Friday) AND (Connection:Protocol EQUALS RADIUS)	Full Access VLAN	
2. (Tips:Role EQUALS Manager) AND (Connection:Protocol BELONGS_TO RADIUS, TACACS, WEBAUTH, Application)	Full Access VLAN	
3. (Tips:Role EQUALS Engineer) AND (Connection:Protocol BELONGS_TO WEBAUTH)	Employee Vlan	

Based on the Policy configuration shown, which VLAN will be assigned when a user with ClearPass role Engineer authenticates to the network successfully on Saturday using connection protocol WEBAUTH?

- A. Deny Access
- B. Employee VLAN
- C. Internet VLAN
- D. Full Access VLAN

Correct Answer: B

QUESTION 6

An administrator configures an ArubaOS-Switch for per-user tunneled node. Which protocols does the switch use to establish and maintain a connection with the Aruba Mobility Controller (MO)? (Select two.)

- A. GRE
- B. SSL
- C. PAPI
- D. IPSec

Correct Answer: AC

QUESTION 7


A network administrator wants to use Aruba AirWave to audit an AOS-Switch configuration. What is one requirement?

- A. The switch defines the AirWave IP address in its zero touch provisioning (ZTP) profile.
- B. The switch specifies the AirWave IP address for the RADIUS server used for Telnet and SSH authentication.
- C. The switch is authorized in AirWave, which has the correct credentials to log in as a CLI manager.
- D. The switch is set to Manage Read-Write mode in AirWave but is not set to Monitor Only + Firmware Updates.

Correct Answer: B

QUESTION 8

Refer to the exhibit.

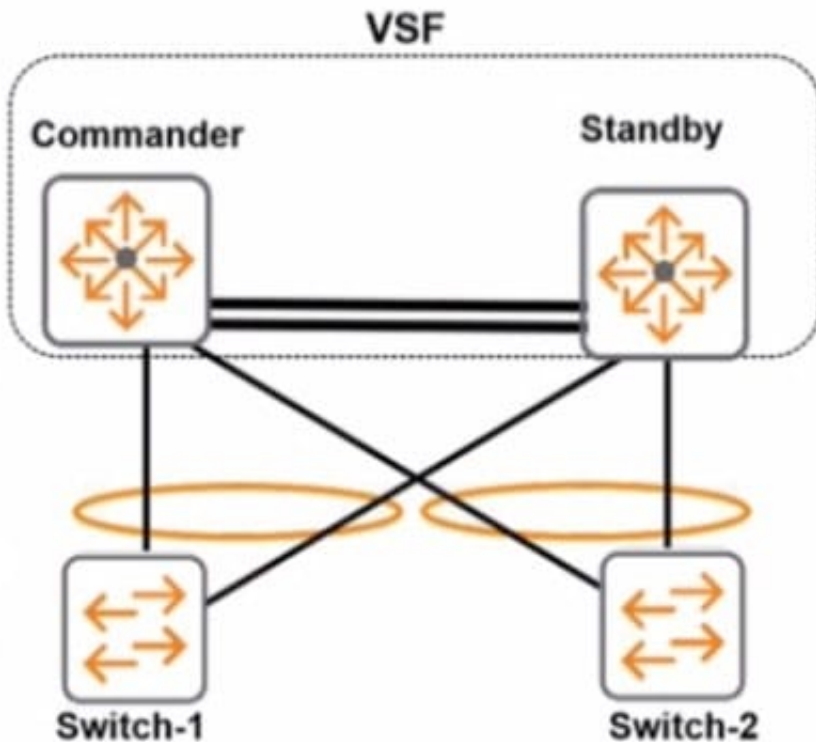

A known unicast packet is received from Switch-1 on the standby and must be forwarded to Switch-2. How does the VSF fabric decide which port in the aggregated link should forward the packet?

- A. The standby uses its own port in the link aggregation to forward the fabric.
- B. The standby sends the packet to the commander over a VSF link, and the commander decides the correct port.
- C. The standby uses the typical load sharing algorithm, and it might select either its port or the commander's port.
- D. The standby selects the port on the designated forwarder for the aggregation.

Correct Answer: A

QUESTION 9

A network administrator configures VSF settings on two Aruba 2930F switches. The switches form two separate VSF fabrics. What should the administrator check?

- A. that the domain ID matches on both switches
- B. that each switch is assigned a unique VSF priority
- C. that the switch with the lower priority has the lower member ID
- D. that LLDP MAD is configured on both members

Correct Answer: C

QUESTION 10

Refer to the exhibit.

Configuration » Authentication » Sources » Add - remotelab AD

Authentication Sources - remotelab AD

Summary	General	Primary	Attributes
Specify filter queries used to fetch authentication and authorization attributes			
Filter Name	Attribute Name	Alias Name	Enabled As
1. Authentication	dn	UserDN	-
	department	Department	Role, Attribute
	title	Title	Attribute
	company	company	-
	memberOf	memberOf	Role, Attribute
	telephoneNumber	Phone	Attribute
	mail	Email	Attribute

Exhibit: accp67-312

Based on the Attribute configuration shown, which statement accurately describes the status of attribute values?

- A. Only the attribute values of department and memberOf can be used in role mapping policies.
- B. The attribute values of department, title, memberOf, telephoneNumber, and mail are directly applied as ClearPass.
- C. Only the attribute value of company can be used in role mapping policies, not the other attributes.
- D. The attribute values of department and memberOf are directly applied as ClearPass roles.
- E. Only the attribute values of title, telephoneNumber, and mail can be used in role mapping policies.

Correct Answer: D