

JN0-250^{Q&As}

Mist AI, Associate (JNCIA-MistAI)

Pass Juniper JN0-250 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/jn0-250.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1

Which Mist subscription is required for location tracking of Bluetooth badges?

- A. Asset Visibility
- B. Wi-Fi Assurance
- C. Virtual Network Assistant
- D. User Engagement

Correct Answer: A

QUESTION 2

Which two 802.11 amendments operate within the 2.4 GHz band? (Choose two.)

- A. 802.11ax
- B. 802.11ac
- C. 802.11a
- D. 802.11b

Correct Answer: BD

QUESTION 3

Which statement is correct about 802.11 wireless network interfaces?

- A. Wireless NICs process all frames that are heard.
- B. Wireless NICs use Carrier Sense Multiple Access Collision Detection.
- C. Wireless NICs operate in full-duplex mode.
- D. A wireless NIC only receives frames destined for it.

Correct Answer: B

QUESTION 4

How should you design a WLAN to ensure optimal performance?

- A. Place one access point in every room and allow RRM to tune the power and channel settings.
- B. Use RF modelling software to design a WLAN to satisfy customer requirements.

C. Initially install 4-8 access points, then use the Mist capacity SLE to determine the remaining access point placements.

D. Place an access point every 8-15 meters in all areas requiring coverage.

Correct Answer: B

QUESTION 5

Which Mist feature provides an overview of the user experience?

A. Service Level Expectations

B. Policy

C. Location Services

D. Insights

Correct Answer: D

QUESTION 6

What would cause reduced Wi-Fi performance?

A. using 40 MHz channels on 5 GHz

B. using a PSK

C. using a single SSID

D. using too many SSIDs

Correct Answer: D

QUESTION 7

Which statement is correct about the Mist API?

A. Proprietary tools are required to use the Mist API.

B. The Mist API is part of the basic subscription.

C. You need one AP connected to use the Mist API.

D. The Mist API requires calling support for access.

Correct Answer: A

QUESTION 8

What is an 802.11 management frame transmitted by an AP?

- A. echo request
- B. ping
- C. keepalive
- D. beacon

Correct Answer: D

QUESTION 9

What happens if your Juniper Mist subscriptions expire?

- A. Devices are bricked.
- B. Access to the UI will be shut off.
- C. Devices remain operational but cannot make any further configuration changes.
- D. Devices will be randomly turned off and on.

Correct Answer: C

QUESTION 10

The DHCP server has run out of address leases on a site.

In this scenario, which SLE would be useful to what is happening?

- A. capacity
- B. throughput
- C. roaming
- D. successful connects

Correct Answer: D

QUESTION 11

What is the base subscription required to get started with a Mist access point?

- A. Wi-Fi Management and Assurance
- B. Virtual Network Assistant

C. Premium Analytics

D. Mist Edge

Correct Answer: A

QUESTION 12

What is the width for a 2.4 GHz OFDM channel?

A. 20 MHz

B. 30 MHz

C. 5 MHz

D. 10 MHz

Correct Answer: A

QUESTION 13

You are designing a wireless network that requires smooth roaming performance and redundant coverage from at least two access points at every location.

What ensures that both of these functional requirements are satisfied?

A. co-channel interference


B. secondary coverage

C. primary coverage

D. data rate

Correct Answer: D

QUESTION 14

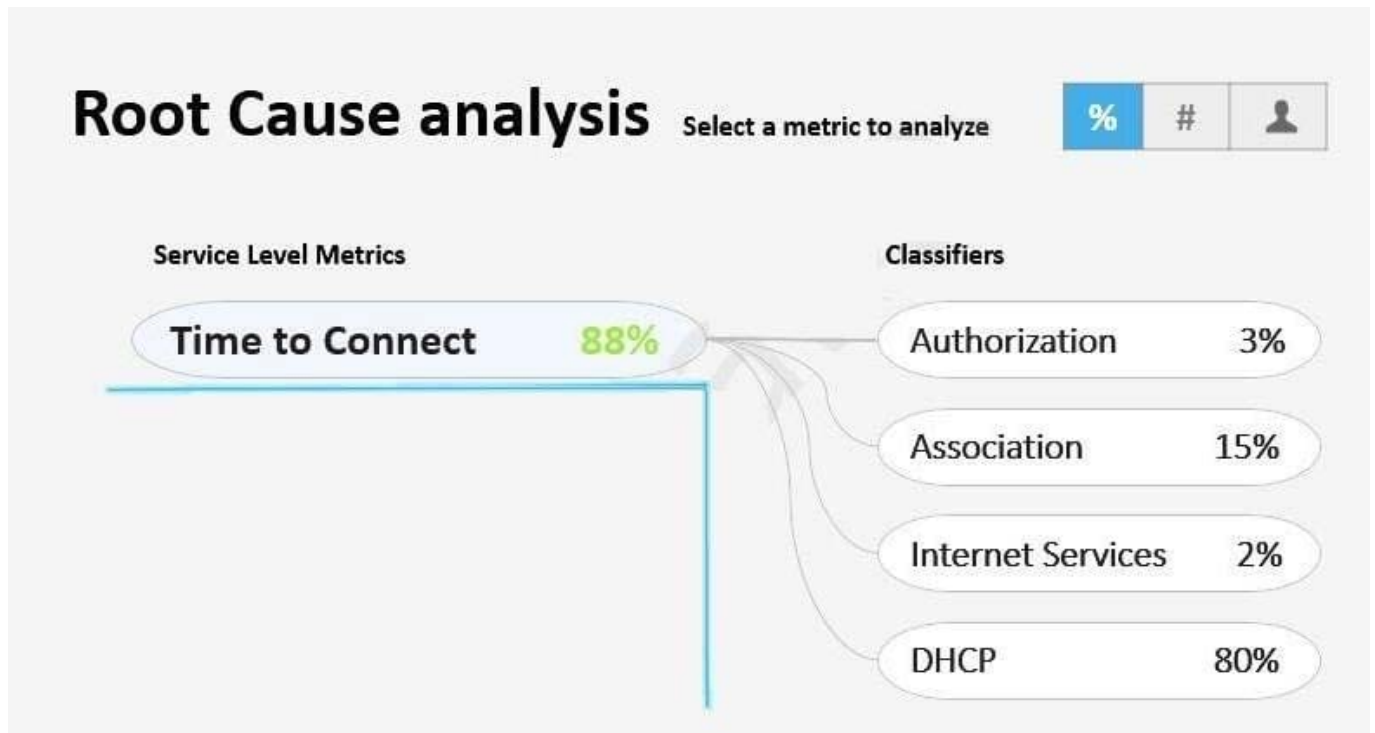

Referring to the exhibit, what do you determine about the site's Time to Connect SLE metric?

- A. Successful connect averaged 1.6 seconds.
- B. Eighty percent of the Time to Connect failures are related to DHCP failures.
- C. All clients cannot connect to the Internet.
- D. Time to Connect Association DHCP failures impacted 80% of users.

Correct Answer: A

QUESTION 15

By default, which statement is correct regarding the upstream interfaces configuration on a Mixtape?

- A. The Interface is configured to send untagged traffic.
- B. The interface is configured as a trunk port and accepts only tagged traffic.
- C. The interface is configured to use VLAN 10.
- D. The Interface is configured to use VLAN 11.

Correct Answer: B