

JN0-334^{Q&As}

Security-Specialist (JNCIS-SEC)

Pass Juniper JN0-334 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/jn0-334.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

You want to collect events and flows from third-party vendors. Which solution should you deploy to accomplish this task?

- A. Log Director
- B. JSA
- C. Policy Enforcer
- D. Contrail

Correct Answer: B

QUESTION 2

What is the default session timeout value for ICMP and UDP traffic?

- A. 30 seconds
- B. 30 minutes
- C. 60 seconds
- D. 5 minutes

Correct Answer: C

QUESTION 3

Which two statements describe how rules are used with Juniper Secure Analytics? (Choose two.)

- A. When a rule is triggered, JSA can respond by sending an e-mail to JSA administrators.
- B. Rules are defined on Junos Space Security Director, and then pushed to JSA log collectors.
- C. A rule defines matching criteria and actions that should be taken when an events matches the rule.
- D. When a rule is triggered, JSA can respond by blocking all traffic from a specific source address.

Correct Answer: AC

QUESTION 4

You are deploying a vSRX into a vSphere environment which applies the configuration from a bootable ISO file containing the juniper.conf file. After the vSRX boots and has the configuration applied, you make additional device specific configuration changes, commit, and reboot the device. Once the device finishes rebooting, you notice the specific changes you made are missing but the original configuration is applied.

In this scenario, what is the problem?

- A. Configuration changes do not persist after reboots on vSRX.
- B. The juniper.conf file was not applied to the vSRX.
- C. The configuration file is corrupt.
- D. The ISO file is still mounted on the vSRX.

Correct Answer: D

Reference: <https://www.juniper.net/documentation/us/en/software/vsrx/vsrx-kvm/topics/task/security-vsrxkvm-bootstrap-config.html>

QUESTION 5

You are asked to improve resiliency for individual redundancy groups in an SRX4600 chassis cluster. Which two features would accomplish this task? (Choose two.)

- A. IP address monitoring
- B. control link recovery
- C. interface monitoring
- D. dual fabric links

Correct Answer: BD

QUESTION 6

Which two functions are performed by Juniper Identity Management Service (JIMS)? (Choose two.)

- A. JIMS synchronizes Active Directory authentication information between a primary and secondary JIMS server.
- B. JIMS forwards Active Directory authentication information to SRX Series client devices.
- C. JIMS collects and maintains a database of authentication information from Active Directory domains.
- D. JIMS replicates Active Directory authentication information to non-trusted Active Directory domain controllers.

Correct Answer: AC

QUESTION 7

What information does JIMS collect from domain event log sources? (Choose two.)

- A. For user login events, JIMS collects the username and group membership information.
- B. For device login events, JIMS collects the device IP address and operating system version.
- C. For device login events, JIMS collects the device IP address and machine name information.
- D. For user login events, JIMS collects the login source IP address and username information.

Correct Answer: CD

QUESTION 8

Click the Exhibit button.

Add SRX Client Configuration

Template: *****

SRX IP Address: 172.25.11.1

Description: vsrx1

WebAPI Configuration: WebAPI (Legacy)

IPv6 Reporting: Enable

SRX Client to JIMS

Client ID: vsrx1

Client Secret: *****

Token Lifetime: 1200 (60 - 36000 sec(s))

OK Cancel

Referring to the exhibit, which two values in the JIMS SRX client configuration must match the values configured on the SRX client? (Choose two.)

- A. IPv6 Reporting

- B. Client ID
- C. Client Secret
- D. Token Lifetime

Correct Answer: BC

Reference: https://www.juniper.net/documentation/en_US/jims/topics/task/configuration/jims-srxconfiguring.html

QUESTION 9


When referencing a SSL proxy profile in a security policy, which two statements are correct? (Choose two.)

- A. A security policy can reference both a client-protection SSL proxy profile and a server-protection proxy profile.
- B. If you apply an SSL proxy profile to a security policy and forget to apply any Layer7 services to the security policy, any encrypted traffic that matches the security policy is not decrypted.
- C. A security policy can only reference a client-protection SSL proxy profile or a server-protection SSL proxy profile.
- D. If you apply an SSL proxy profile to a security policy and forget to apply any Layer7 services to the security policy, any encrypted traffic that matches the security policy is decrypted.

Correct Answer: AD

QUESTION 10

Click the Exhibit button.

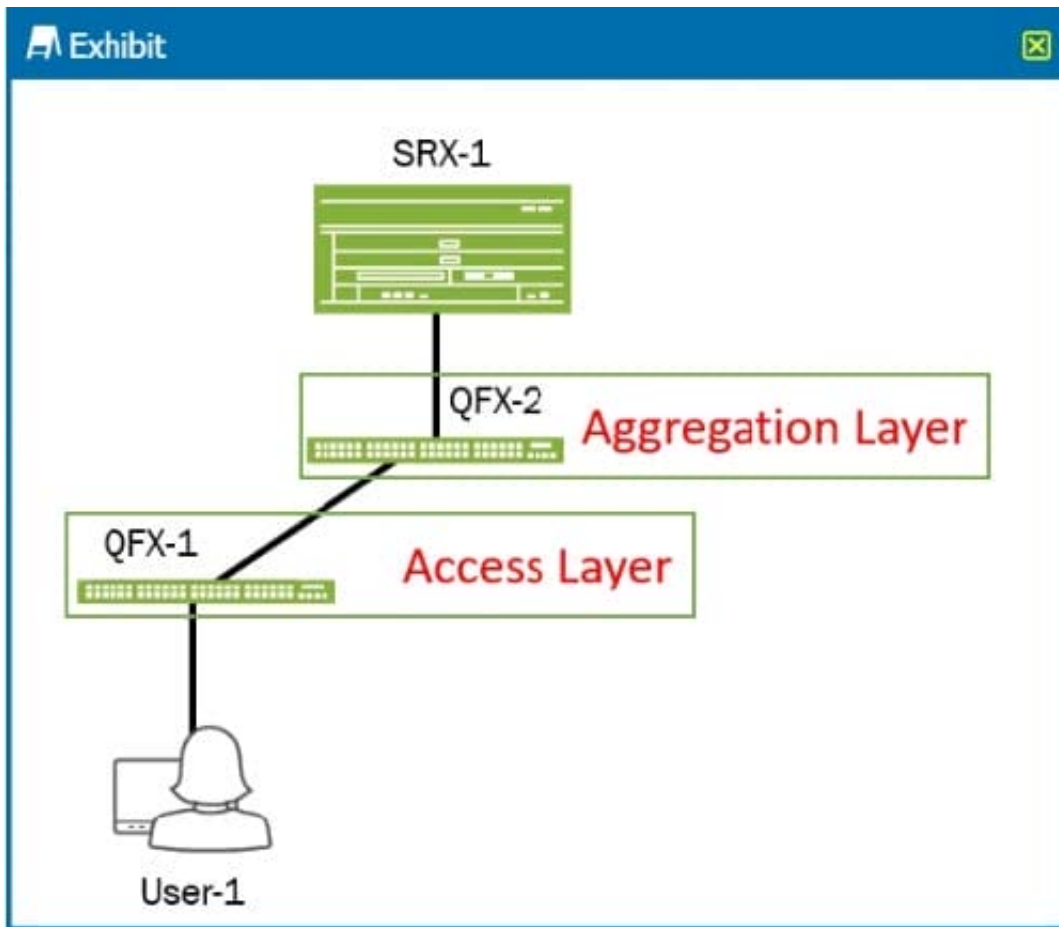

Referring to the exhibit, you want to deploy Sky ATP with Policy Enforcer to block infected hosts at the access layer.

To complete this task, where should you configure the default gateway for the User-1 device?

- A. the irb interface on QFX-2
- B. the irb interface on QFX-1
- C. the interface of QFX-1 that connects to User-1
- D. the interface on SRX-1 that connects to QFX-2

Correct Answer: B

QUESTION 11

Which three features are parts of Juniper Networks' AppSecure suite? (Choose three.)

- A. AppQoE
- B. APBR
- C. Secure Application Manager

D. AppQoS

E. AppFormix

Correct Answer: ABD

Reference:

https://www.juniper.net/documentation/en_US/junos/information-products/pathway-pages/security/securityapplication-identification.pdf

QUESTION 12

You want to support reth LAG interfaces on a chassis cluster.

What must be enabled on the interconnecting switch to accomplish this task?

A. RSTP

B. 802.3ad

C. LLDP

D. swfab

Correct Answer: B

Reference: https://www.juniper.net/documentation/en_US/junos/topics/topic-map/security-chassis-clusterredundant-ethernet-lag-interfaces.html

QUESTION 13

Click the Exhibit button.

```
Exhibit

set groups node0 system host-name SRX-1
set groups node0 interfaces fsp0 unit 0 family inet address 10.200.0.1/24
set groups node1 system host-name SRX-2
set groups node1 interfaces fsp0 unit 0 family inet address 10.200.0.2/24
```

You are configuring an SRX chassis cluster with the node-specific hostname and management address. Referring to the exhibit, which configuration completes this requirement?

- A. `set groups node$ interfaces fxp0 unit 0 family inet address 10.200.0.254/24 ;`
- B. `set apply-groups node0`
`set apply-groups node1`
- C. `set apply-groups ${node}`
- D. `set groups node0 interfaces fxp0 unit 0 family inet address 10.200.0.254/2`
`set groups node1 interfaces fxp0 unit 0 family inet address 10.200.0.254/2`

A. B. C. D.

Correct Answer: C

QUESTION 14

What are two management methods for cSRX? (Choose two.)

- A. Network Director
- B. J-Web
- C. CLI
- D. Contrail

Correct Answer: BC

QUESTION 15

Which three statements are true about the difference between cSRX-based virtual security deployments and vSRX-based virtual security deployments? (Choose three.)

- A. vSRX provides Layer 2 to Layer 7 secure services and cSRX provides Layer 4 to Layer 7 secure services.
- B. cSRX requires less storage and memory space for a given deployment than vSRX-based solutions.
- C. cSRX-based solutions are more scalable than vSRX-based solutions.
- D. vSRX and cSRX both provide Layer 2 to Layer 7 secure services.
- E. vSRX provides faster deployment time and faster reboots compared to cSRX.

Correct Answer: ABC

Reference: https://www.juniper.net/documentation/en_US/day-one-books/topics/concept/juniper-vsrxversus-csrx.html

[JN0-334 PDF Dumps](#)

[JN0-334 Exam Questions](#)

[JN0-334 Braindumps](#)