

4A0-107^{Q&As}

Alcatel-Lucent Quality of Service

Pass Alcatel-Lucent 4A0-107 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.lead4pass.com/4a0-107.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Alcatel-Lucent Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1


In a Nokia 7750 SR, which of the following QoS policies CANNOT include packet classification criteria?

- A. SAP-ingress
- B. SAP-egress
- C. Network-queue
- D. Network

Correct Answer: B

QUESTION 2

Click the exhibit button below.

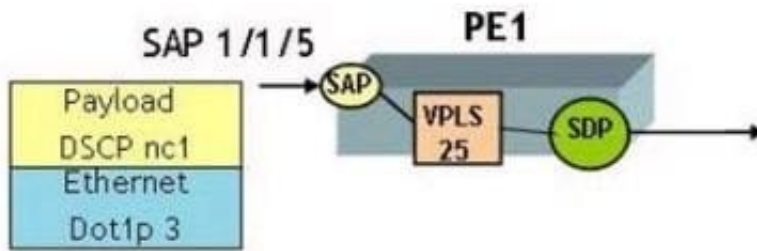

```

qos sap-ingress 5 create
    dot1p 3 fc "ef"
    dscp nc1 fc "nc"
ip-criteria
entry 10 create
    match protocol tcp
                        dst-port gt 20
    exit
    action fc "l2"
exit
entry 20 create
    match protocol tcp
        dst-ip
            120.110.1.1/32
        dst-port eq 23
    exit
    action fc "h1"
exit
exit
default-fc "h2"
    
```

```

vpls 25 customer 1 create
    stp
        shutdown
    exit
    sap 1/1/5 create
        ingress
            qos 5
        exit
    exit
    no shutdown
exit
    
```

Based on the configuration shown below, name the forwarding class to be associated with a TCP packet encapsulated inside an Ethernet frame that arrives on SAP 1/1/5 with the following characteristics: Destination IP address = 120.110.1.1 TCP port number = 23 DSCP value = nc1 Dot1pvalue = 3

- A. H2
- B. NC
- C. L2
- D. EF
- E. H1
- F. BE

Correct Answer: C

QUESTION 3

Which of the following parameters are used in a hierarchical scheduler-policy to specify the priority of the child scheduler/queue for allocating bandwidth beyond its committed rate? (Choose two)

- A. CIR
- B. CIR level
- C. CIR weight
- D. Rate
- E. Level
- F. Weight

Correct Answer: EF

QUESTION 4


A queue-group template can contain both queues and policers when applied under which conditions?

- A. When applied at the port level for access ingress.
- B. When applied at the FP (Forwarding Pass) level for access ingress.
- C. When applied at the FP (Forwarding Pass) level for network ingress.
- D. When applied at the port level for network egress.

Correct Answer: D

QUESTION 5

Click the exhibit button below. Each router is interconnected by a single GigE link, as shown in the diagram below.

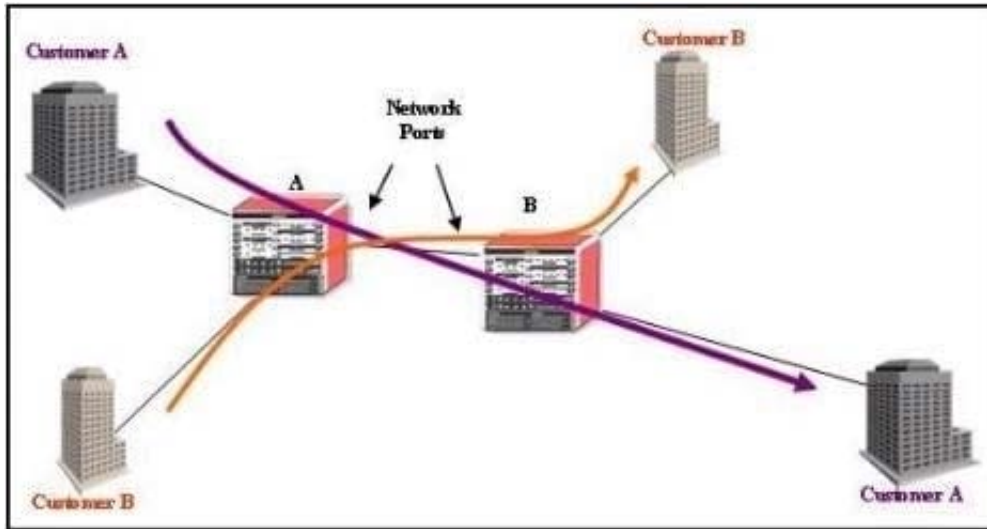

Note: The arrows show the direction of traffic flow.

Traffic from Customer A and Customer B that is classified to the same forwarding class is queued together at the ingress of Router B.

- A. True
- B. False

Correct Answer: A

[4A0-107 PDF Dumps](#)

[4A0-107 Study Guide](#)

[4A0-107 Exam Questions](#)