

A2090-303^{Q&As}

Assessment: IBM InfoSphere DataStage v9.1 Assessment

Pass IBM A2090-303 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/a2090-303.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by IBM Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



QUESTION 1

When you run a parallel job, any error messages and warnings are written to the job log and can be viewed from the Director client. What message handler level is available?

- A. stage level
- B. record level
- C. project level
- D. parameter level

Correct Answer: C

QUESTION 2

Which statement is true about creating DataStage projects?

- A. DataStage projects cannot be created during DataStage installation.
- B. After installation only DataStage developers can create DataStage projects.
- C. After installation DataStage projects can be created in DataStage Administrator.
- D. After installation DataStage projects can be created in the Information Server Web Console.

Correct Answer: C

QUESTION 3

Which statement describes a SCD Type One update in the Slowly Changing Dimension stage?

- A. Adds a new row to the fact table.
- B. Adds a new row to a dimension table.
- C. Overwrites an attribute in the fact table.
- D. Overwrites an attribute in a dimension table.

Correct Answer: D

QUESTION 4


Which statement is true about Information Server logging?

- A. Multiple configurations can be active at the same time.
- B. Severity levels specify the threshold for saving events in the metadata repository.
- C. You can activate or de-activate the logging configuration in DataStage Administrator.
- D. You must log into the Information Server Web Console as a DataStage administrator in order to configure logging.

Correct Answer: B

QUESTION 5

In the exhibit, a Funnel stage has two input links. Input 1 (Seq_File) comes from a Sequential File stage with "Readers per Node" set to "2". Input 2 (DataSet) comes from a dataset created with 3 partitions. In the Funnel stage, the funnel type is set to "Sequence".

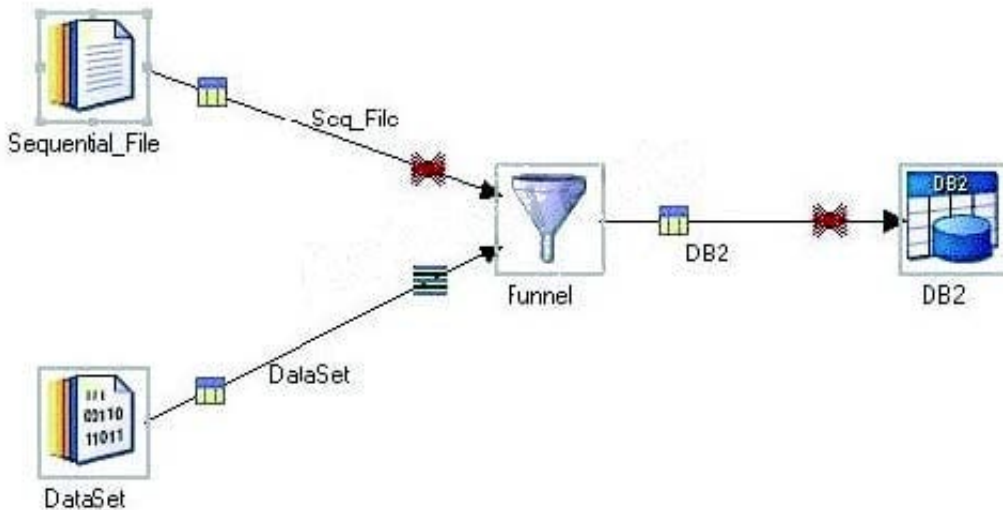

The parallel configuration file contains 4 nodes. How many instances of the Funnel stage run in parallel?

- A. 1
- B. 2
- C. 4
- D. 6

Correct Answer: C