



C2140-842^{Q&As}

Rational Functional Tester for Java

Pass IBM C2140-842 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.lead4pass.com/C2140-842.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by IBM Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

Which three actions are possible with RFT? (Choose three.)

- A. use a wizard to substitute literals with datapool variables
- B. substitute literals in verification points with datapool variables
- C. create a datapool while recording a data-driven script
- D. create scripts in c#

Correct Answer: ABC

QUESTION 2

Which three methods write to the RFT log? (Choose three.)

- A. logError()
- B. logDefect()
- C. logInfo()
- D. logWarning()
- E. logSuccess()

Correct Answer: ACD

QUESTION 3

What is an appropriate use of the command Test Object > Highlight when working with verification points?

- A. It is used to highlight the test object at playback (to identify what is being tested).
- B. It is used to create a new verification point in the current script
- C. It is used to highlight the test object (to verify it is found in the application)
- D. It is used to identify all objects in an application which can be tested

Correct Answer: C

QUESTION 4

When you set break points, why does the script not stop at the break points and switch over to the debug perspective?

- A. This is a known eclipse bug in version 6.1 and has been corrected in the latest release or last interim fix



- B. The break point has already been recognized by the JVM and the break point needs to be toggled
- C. Either the icon or debug functional tester script was not invoked or the shift + F11 menu option was not invoked
- D. The debug perspective is not listed as an available perspective when trying to debug a script

Correct Answer: C

QUESTION 5

How many default Java environments can you have within one configuration of Rational Functional Tester?

- A. one for each instance of the application under test
- B. as many default Java environments as are needed to do testing
- C. You can change the java environments dynamically when testing different applications.
- D. only one

Correct Answer: D

[C2140-842 PDF Dumps](#)

[C2140-842 Practice Test](#)

[C2140-842 Braindumps](#)



To Read the [Whole Q&As](#), please purchase the [Complete Version](#) from [Our website](#).

Try our product !

100% Guaranteed Success

100% Money Back Guarantee

365 Days Free Update

Instant Download After Purchase

24x7 Customer Support

Average 99.9% Success Rate

More than 800,000 Satisfied Customers Worldwide

Multi-Platform capabilities - [Windows](#), [Mac](#), [Android](#), [iPhone](#), [iPod](#), [iPad](#), [Kindle](#)


We provide exam PDF and VCE of Cisco, Microsoft, IBM, CompTIA, Oracle and other IT Certifications. You can view Vendor list of All Certification Exams offered:

<https://www.lead4pass.com/allproducts>

Need Help

Please provide as much detail as possible so we can best assist you.

To update a previously submitted ticket:

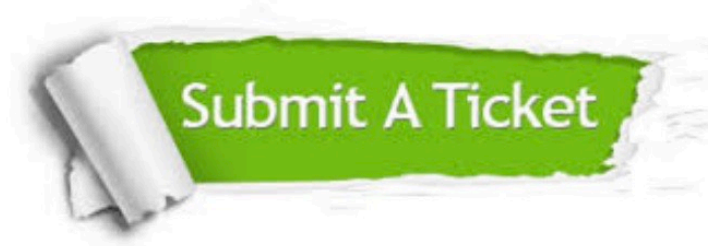

 <p>One Year Free Update Free update is available within One Year after your purchase. After One Year, you will get 50% discounts for updating. And we are proud to boast a 24/7 efficient Customer Support system via Email.</p>	 <p>Money Back Guarantee To ensure that you are spending on quality products, we provide 100% money back guarantee for 30 days from the date of purchase.</p>	 <p>Security & Privacy We respect customer privacy. We use McAfee's security service to provide you with utmost security for your personal information & peace of mind.</p>
---	---	--

Any charges made through this site will appear as Global Simulators Limited.

All trademarks are the property of their respective owners.

Copyright © lead4pass, All Rights Reserved.