

## CKAD<sup>Q&As</sup>

Certified Kubernetes Application Developer (CKAD) Program

### Pass Linux Foundation CKAD Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/ckad.html>

100% Passing Guarantee  
100% Money Back Assurance


Following Questions and Answers are all new published by Linux Foundation Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

## CORRECT TEXT

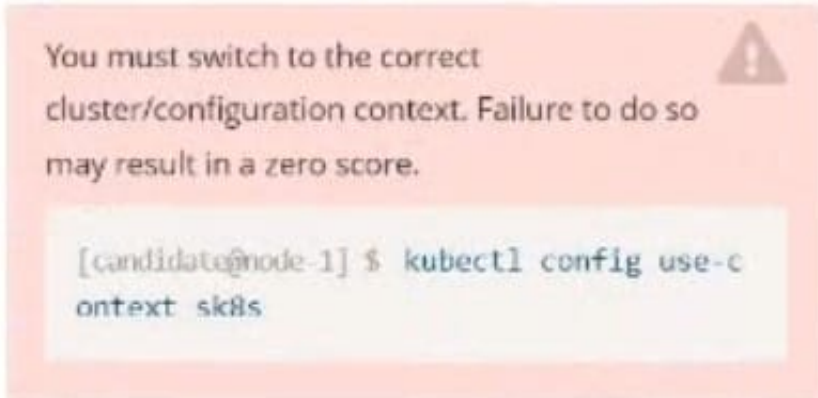

## Task

A Deployment named backend-deployment in namespace staging runs a web application on port 8081.

*The Deployment's manifest files can be found at ~/spicy-pikachu/backend-deployment.yaml.*

Modify the Deployment specifying a readiness probe using path /healthz.

Set initialDelaySeconds to 8 and periodSeconds to 5.

A. Please check explanations

B. Place Holder

Correct Answer: A

```
File Edit View Terminal Tabs Help
Warning: Permanently added '172.31.17.21' (ECDSA) to the list of known hosts.

The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.

candidate@node-1:~$ vi ~/spicy-pikachu/backend-deployment.yaml
candidate@node-1:~$ kubectl config use-context sk8s
Switched to context "sk8s".
candidate@node-1:~$ vim .vimrc
candidate@node-1:~$ vim ~/spicy-pikachu/backend-deployment.yaml
```

```
File Edit View Terminal Tabs Help
apiVersion: apps/v1
kind: Deployment
metadata:
  name: backend-deployment
  namespace: staging
spec:
  selector:
    matchLabels:
      app: nginx
  replicas: 3
  template:
    metadata:
      labels:
        app: nginx
    spec:
      containers:
        - name: nginx
          image: nginx:1.14.2
          ports:
            - containerPort: 8081
          readinessProbe:
            initialDelaySeconds: 8
            periodSeconds: 5
            httpGet:
              path: /healthz
              port: 8081
          volumeMounts:
            - mountPath: /etc/nginx/conf.d/
              name: config
            - mountPath: /usr/share/nginx/html/
              name: www
-- INSERT --
```

```
File Edit View Terminal Tabs Help
Warning: Permanently added '172.31.17.21' (ECDSA) to the list of known hosts.


The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.

candidate@node-1:~$ vi ~/spicy-pikachu/backend-deployment.yaml
candidate@node-1:~$ kubectl config use-context sk8s
Switched to context "sk8s".
candidate@node-1:~$ vim .vimrc
candidate@node-1:~$ vim ~/spicy-pikachu/backend-deployment.yaml
candidate@node-1:~$ kubectl apply -f ~/spicy-pikachu/backend-deployment.yaml
deployment.apps/backend-deployment configured
candidate@node-1:~$ kubectl get pods -n staging
NAME                                READY   STATUS    RESTARTS   AGE
backend-deployment-59d449b99d-cxct6 1/1     Running   0           20s
backend-deployment-59d449b99d-h2zjq 0/1     Running   0           9s
backend-deployment-78976f74f5-b8c85 1/1     Running   0           6h40m
backend-deployment-78976f74f5-flfsj 1/1     Running   0           6h40m
candidate@node-1:~$ kubectl get deploy -n staging
NAME                READY   UP-TO-DATE   AVAILABLE   AGE
backend-deployment 3/3     3             3           6h40m
candidate@node-1:~$ kubectl get deploy -n staging
NAME                READY   UP-TO-DATE   AVAILABLE   AGE
backend-deployment 3/3     3             3           6h41m
candidate@node-1:~$ vim ~/spicy-pikachu/backend-deployment.yaml
```

## QUESTION 2

CORRECT TEXT

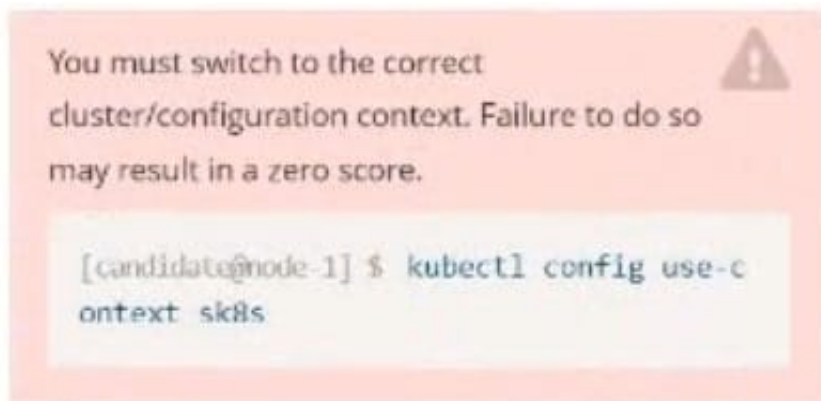

Task: Create a Deployment named expose in the existing ckad00014 namespace running 6 replicas of a Pod. Specify a single container using the ifccnfc/nginx: 1.13.7 image Add an environment variable named NGINX\_PORT with the value 8001 to the container then expose port 8001

- A. Please check explanations
- B. Place Holder

Correct Answer: A

```
candidate@node-1:~$ kubectl config use-context k8s
Switched to context "k8s".
candidate@node-1:~$ kubectl create deploy expose -n ckad00014 --image lfccnct/nginx:1.13.7 --dry-run=client -o yaml > d
ep.yaml
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
```

```
File Edit View Terminal Tabs Help
apiVersion: apps/v1
kind: Deployment
metadata:
  creationTimestamp: null
  labels:
    app: expose
  name: expose
  namespace: ckad00014
spec:
  replicas: 6
  selector:
    matchLabels:
      app: expose
  strategy: {}
  template:
    metadata:
      creationTimestamp: null
      labels:
        app: expose
    spec:
      containers:
      - image: lfccncf/nginx:1.13.7
        name: nginx
        ports:
        - containerPort: 8001
        env:
        - name: NGINX_PORT
          value: "8001"
: wq
```

```
File Edit View Terminal Tabs Help
candidate@node-1:~$ kubectl config use-context k8s
Switched to context "k8s".
candidate@node-1:~$ kubectl create deploy expose -n ckad00014 --image lfccncf/nginx:1.13.7 --dry-run=client -o yaml > dep.yaml
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$
candidate@node-1:~$ vim dep.yaml
candidate@node-1:~$ kubectl create -f dep.yaml
deployment.apps/expose created
candidate@node-1:~$ kubectl get pods -n ckad00014
NAME                                READY   STATUS              RESTARTS   AGE
expose-85dd99d4d9-25675             0/1     ContainerCreating   0           6s
expose-85dd99d4d9-4fhcc             0/1     ContainerCreating   0           6s
expose-85dd99d4d9-fl7j             0/1     ContainerCreating   0           6s
expose-85dd99d4d9-tt6rm            0/1     ContainerCreating   0           6s
expose-85dd99d4d9-vjd8b            0/1     ContainerCreating   0           6s
expose-85dd99d4d9-vtzpq            0/1     ContainerCreating   0           6s
candidate@node-1:~$ kubectl get deploy -n ckad00014
NAME    READY   UP-TO-DATE   AVAILABLE   AGE
expose  6/6     6             6           15s
candidate@node-1:~$
```

### QUESTION 3

CORRECT TEXT



### Task

Create a new deployment for running nginx with the following parameters:

1.  
Run the deployment in the kdpd00201 namespace. The namespace has already been created
  2.  
Name the deployment frontend and configure with 4 replicas
  3.  
Configure the pod with a container image of lfcncf/nginx:1.13.7
  4.  
Set an environment variable of NGINX\_\_PORT=8080 and also expose that port for the container above
- A. Please check explanations  
B. Place Holder
- Correct Answer: A



```

student@node-1:~$ kubectl create deployment api --image=lfcncf/nginx:1.13.7-alpine --replicas=4
-n kdpd00201 --dry-run=client -o yaml > nginx_deployment.yml
student@node-1:~$ vim nginx_deployment.yml
    
```

```

apiVersion: apps/v1
kind: Deployment
metadata:
  creationTimestamp: null
  labels:
    app: api
  name: api
  namespace: kdpd00201
spec:
  replicas: 4
  selector:
    matchLabels:
      app: api
  strategy: {}
  template:
    metadata:
      creationTimestamp: null
      labels:
        app: api
    spec:
      containers:
      - image: lfcncf/nginx:1.13.7-alpine
        name: nginx
        resources: {}
status: {}
~
"nginx_deployment.yml" 25L, 421C
4,1 All
    
```

```

apiVersion: apps/v1
kind: Deployment
metadata:
  labels:
    app: api
  name: api
  namespace: kdpd00201
spec:
  replicas: 4
  selector:
    matchLabels:
      app: api
  template:
    metadata:
      labels:
        app: api
    spec:
      containers:
      - image: lfcncf/nginx:1.13.7-alpine
        name: nginx
        ports:
        - containerPort: 8080
      env:
      - name: NGINX_PORT
        value: "8080"
~
23,8 All
    
```

```


student@node-1:~$ kubectl create deployment api --image=lfcncf/nginx:1.13.7-alpine --replicas=4
-n kdpd00201 --dry-run=client -o yaml > nginx_deployment.yml
student@node-1:~$ vim nginx_deployment.yml
student@node-1:~$ kubectl create nginx_deployment.yml
Error: must specify one of -f and -k

error: unknown command "nginx_deployment.yml"
See 'kubectl create -h' for help and examples
student@node-1:~$ kubectl create -f nginx_deployment.yml
error: error validating "nginx_deployment.yml": error validating data: ValidationError(Deployment.spec.template.spec): unknown field "env" in io.k8s.api.core.v1.PodSpec; if you choose to ignore these errors, turn validation off with --validate=false
student@node-1:~$ vim nginx_deployment.yml
student@node-1:~$ kubectl create -f nginx_deployment.yml
deployment.apps/api created
student@node-1:~$ kubectl get pods -n kdpd00201
NAME                                READY   STATUS    RESTARTS   AGE
api-745677f7dc-7hnmv                1/1     Running   0           13s
api-745677f7dc-9q5vp                1/1     Running   0           13s
api-745677f7dc-fd4gk                1/1     Running   0           13s
api-745677f7dc-mbnpk                1/1     Running   0           13s
student@node-1:~$
    
```



**QUESTION 4**

## CORRECT TEXT

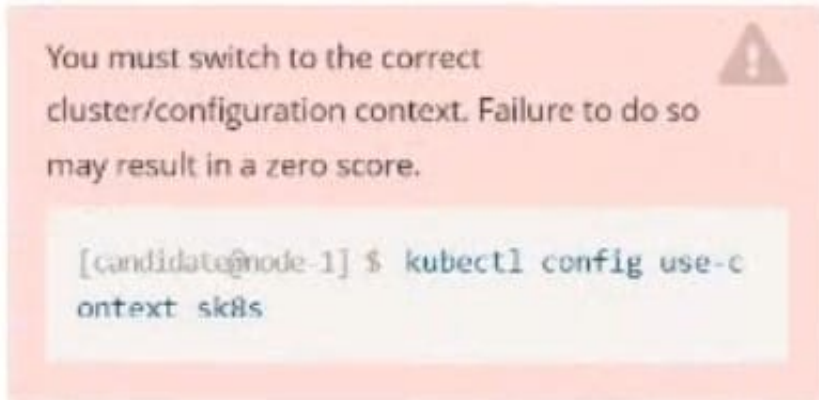

Task:

A pod within the Deployment named buffalo-deployment and in namespace gorilla is logging errors.

Look at the logs identify errors messages.

Find errors, including User "system:serviceaccount:gorilla:default" cannot list resource "deployment" [...] in the namespace "gorilla"

The buffalo-deployment `S manifest can be found at -/prompt/escargot/buffalo- deployment.yaml

A. Please check explanations

B. Place Holder

Correct Answer: A

```
File Edit View Terminal Tabs Help
deployment.apps/backend-deployment configured
candidate@node-1:~$ kubectl get pods -n staging
NAME                                READY   STATUS    RESTARTS   AGE
backend-deployment-59d449b99d-cxct6 1/1     Running   0           20s
backend-deployment-59d449b99d-h2zjq 0/1     Running   0           9s
backend-deployment-78976f74f5-b8c85 1/1     Running   0           6h40m
backend-deployment-78976f74f5-flfsj 1/1     Running   0           6h40m
candidate@node-1:~$ kubectl get deploy -n staging
NAME                                READY   UP-TO-DATE   AVAILABLE   AGE
backend-deployment                  3/3     3             3           6h40m
candidate@node-1:~$ kubectl get deploy -n staging
NAME                                READY   UP-TO-DATE   AVAILABLE   AGE
backend-deployment                  3/3     3             3           6h41m
candidate@node-1:~$ vim ~/spicy-pikachu/backend-deployment.yaml
candidate@node-1:~$ kubectl config use-context k8s
Switched to context "k8s".
candidate@node-1:~$ kubectl set serviceaccount deploy app-1 app -n frontend
deployment.apps/app-1 serviceaccount updated
candidate@node-1:~$ kubectl config use-context k8s
Switched to context "k8s".
candidate@node-1:~$ vim ~/prompt-escargot/buffalo-deployment.yaml
candidate@node-1:~$ vim ~/prompt-escargot/buffalo-deployment.yaml
candidate@node-1:~$ kubectl apply -f ~/prompt-escargot/buffalo-deployment.yaml
deployment.apps/buffalo-deployment configured
candidate@node-1:~$ kubectl get pods -n gorilla
NAME                                READY   STATUS              RESTARTS   AGE
buffalo-deployment-776844df7f-r5fsb 1/1     Running             0           5h38m
buffalo-deployment-859898c6f5-zx5gj 0/1     ContainerCreating  0           8s
candidate@node-1:~$ kubectl get deploy -n gorilla
NAME                                READY   UP-TO-DATE   AVAILABLE   AGE
buffalo-deployment                  1/1     1             1           6h38m
candidate@node-1:~$
```

## QUESTION 5

CORRECT TEXT

```
Readme  Web Terminal THE LINUX FOUNDATION
student@node-1:~$ kubectl top pods -n cpu-stress
NAME                CPU(cores)   MEMORY(bytes)
max-load-98b99e     68m          6Mi
max-load-ab2d3a     21m          6Mi
max-load-kipb9a     45m          6Mi
student@node-1:~$ echo "max-load-98b99e" > /opt/ks0B00301/pod.txt
```



Task:

Update the Deployment app-1 in the frontend namespace to use the existing ServiceAccount app.

A. Please check explanations

B. Place Holder

Correct Answer: A

```

File Edit View Terminal Tabs Help
The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.

candidate@node-1:~$ vi ~/spicy-pikachu/backend-deployment.yaml
candidate@node-1:~$ kubectl config use-context sk8s
Switched to context "sk8s".
candidate@node-1:~$ vim .vimrc
candidate@node-1:~$ vim ~/spicy-pikachu/backend-deployment.yaml
candidate@node-1:~$ kubectl apply -f ~/spicy-pikachu/backend-deployment.yaml
deployment.apps/backend-deployment configured
candidate@node-1:~$ kubectl get pods -n staging
NAME                                READY   STATUS    RESTARTS   AGE
backend-deployment-59d449b99d-cxct6 1/1     Running   0           20s
backend-deployment-59d449b99d-h2zjq 0/1     Running   0           9s
backend-deployment-78976f74f5-b8c85 1/1     Running   0           6h40m
backend-deployment-78976f74f5-flfsj 1/1     Running   0           6h40m
candidate@node-1:~$ kubectl get deploy -n staging
NAME                READY   UP-TO-DATE   AVAILABLE   AGE
backend-deployment 3/3     3             3           6h40m
candidate@node-1:~$ kubectl get deploy -n staging
NAME                READY   UP-TO-DATE   AVAILABLE   AGE
backend-deployment 3/3     3             3           6h41m
candidate@node-1:~$ vim ~/spicy-pikachu/backend-deployment.yaml
candidate@node-1:~$ kubectl config use-context k8s
Switched to context "k8s".
candidate@node-1:~$ kubectl set serviceaccount deploy app-1 app -n frontend
deployment.apps/app-1 serviceaccount updated
candidate@node-1:~$

```

[CKAD PDF Dumps](#)

[CKAD VCE Dumps](#)

[CKAD Braindumps](#)