Leads4Pass

PCAP^{Q&As}

PCAP^Q&As

Certified Associate in Python Programming

Pass Python Institute PCAP Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.leads4pass.com/pcap-31-02.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Python Institute Official Exam Center

⚙ **Instant Download** After Purchase

⚙ **100% Money Back** Guarantee

⚙ **365 Days** Free Update

⚙ **800,000+** Satisfied Customers

QUESTION 1

Which of the following statements are true? (Choose two.)

A. an escape sequence can be recognized by the / sign put in front of it

B. II in ASCII stands for Internal Information

C. ASCII is a subset of UNICODE

D. a code point is a number assigned to a given character

Correct Answer: CD

QUESTION 2

Which of the following expressions evaluate to True? (Choose two.)

A. ord("Z") - ord("z") == ord("0")

B. chr(ord('A') +1) == 'B'

C. len('\'') == 1

D. len(""" """) == 0

Correct Answer: AC

QUESTION 3

What is the expected behavior of the following snippet?

```
def a (l, I) :
    return l [I]

print (a (0, [1]) )
```
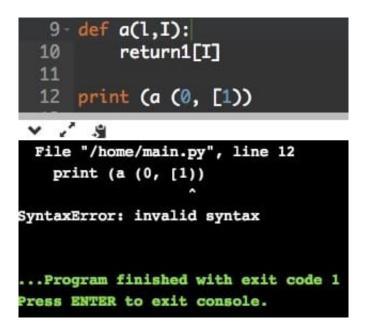
It will:

A. cause a runtime exception

B. print 1

C. print 0, [1]

D. print [1]

Correct Answer: A

```
 9 - def a(l,I):
10       return1[I]
11
12  print (a (0, [1))
```

```
File "/home/main.py", line 12
    print (a (0, [1))
                    ^
SyntaxError: invalid syntax


...Program finished with exit code 1
Press ENTER to exit console.
```

QUESTION 4

A class constructor (Select two answers)

A. can return a value

B. cannot be invoked directly from inside the class

C. can be invoked directly from any of the subclasses

D. can be invoked directly from any of the superclasses

Correct Answer: AD

QUESTION 5

Assuming that the code below has been placed inside a file named code.py and executed successfully, which of the following expressions evaluate to True? (Choose two.)

```
class ClassA:
    var = 1
    def __init__(self, prop):
        prop1 = prop2 = prop
    def __str__(self):
        return

class ClassB(ClassA):
    def __init__(self, prop):
        prop3 = prop ** 2
        super().__init__(prop)

Object = ClassB(2)
```

A. len(ClassB.__bases__) ==2

B. ClassA.__module__ == '__main__'

C. __name__ == 'code.py'

D. str(Object) == 'Object'

Correct Answer: BD