

MCD-LEVEL1-DELTA^{Q&As}

MuleSoft Certified Developer - Level 1 (Mule 4) DELTA

Pass Mulesoft MCD-LEVEL1-DELTA Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/mcd-level1-delta.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Mulesoft
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



QUESTION 1

Refer to the exhibits. A company has defined this Book data type and Book example to be used in APIs. What is valid RAML for an API that uses this Book data type and Book example?

```
##RAML 1.0 DataType
# bookDataType.raml
```

```
type: object
properties:
  ID?: integer
  title: string
  author: string
  publisher?: string
  year: integer
  ISBN:
    type: string
    required: true
```

```
##RAML 1.0 NamedExample
# bookExample.raml
```

```
bookExample:
  ID: 101
  title: Shakespeare
  author: Encyclopaedia Britannica
  publisher: John Wiley & Sons
  year: 2007
  ISBN: "0471767840"
```

A.

```
#%RAML 1.0
title: Books

Book: BookDataType.raml

/books:
  post:
    body:
      application/json:
        type: Book
        examples:
          input: BookExample.raml
    responses:
      201:
        body:
          application/json:
            example:
              message: Book added
```

B.

```
#%RAML 1.0
title: Books

Book: !include BookDataType.raml

/books:
  post:
    body:
      application/json:
        type: Book
        examples:
          input: !include BookExample.raml
    responses:
      201:
        body:
          application/json:
            example:
              message: Book added
```

C.

```

#%RAML 1.0
title: Books

types:
  Book: ABC/DataTypes/BookDataType.raml

/books:
  post:
    body:
      application/json:
        type: Book
        examples:
          input: ABC/Examples/BookExample.raml
    responses:
      201:
        body:
          application/json:
            example:
              message: Book added

```

D.

```

#%RAML 1.0
title: Books

types:
  Book: !include BookDataType.raml

/books:
  post:
    body:
      application/json:
        type: Book
        examples:
          input: !include BookExample.raml
    responses:
      201:
        body:
          application/json:
            example:
              message: Book added

```

A. Option A

B. Option B


C. Option C

D. Option D

Correct Answer: D

QUESTION 2

Refer to the exhibits.

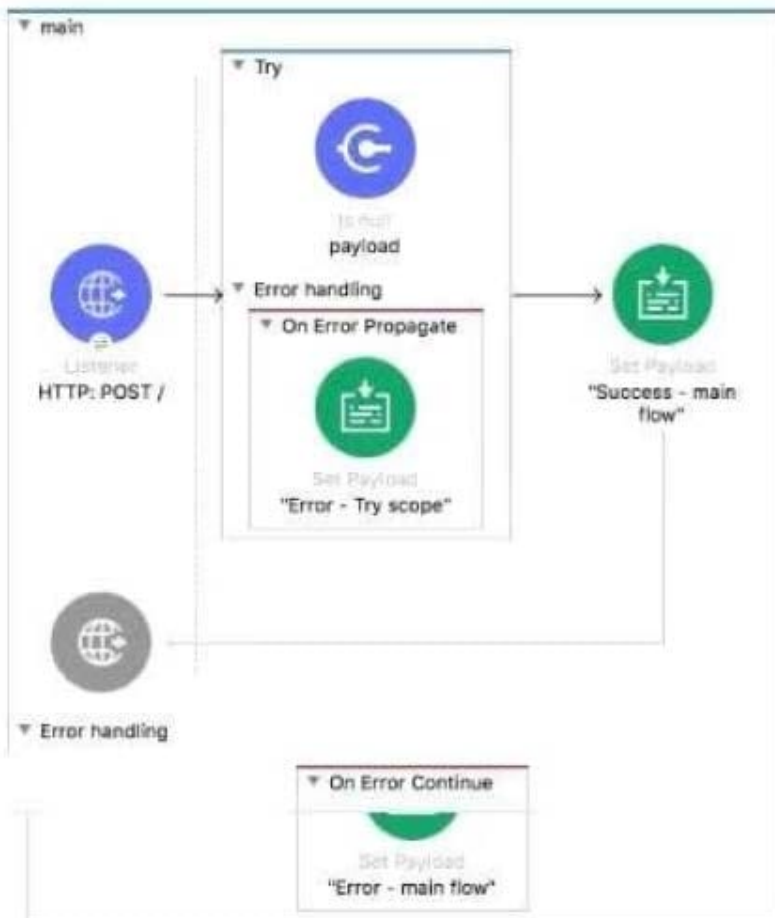

```

<flow name="main">
  <http:listener doc:name="HTTP: POST /" config-ref="HTTP Listener config" path="/" />
  <try doc:name="Try">
    <validation:is-null doc:name="payload" value="#[payload]" message="Validation Error"/>
    <error-handler>
      <on-error-propagate enableNotifications="true" logException="true" doc:name="On Error Propagate">
        <set-payload value="Error - Try scope" doc:name="Error - Try scope"/>
      </on-error-propagate>
    </error-handler>
  </try>
  <set-payload value="Success - main flow" doc:name="Success - main flow" />
  <error-handler>
    <on-error-continue enableNotifications="true" logException="true" doc:name="On Error Continue">
      <set-payload value="Error - main flow" doc:name="Error - main flow" />
    </on-error-continue>
  </error-handler>
</flow>

```

The Validation component in the Try scope throws an error. What response message is returned to a client request to the main flow's HTTP Listener? The Validation component in the Try scope throws an error. What response message is returned to a client request to the main flow's HTTP Listener?

- A. Success - main flow
- B. Error - main flow
- C. Error - Try scope

D. Validation Error

Correct Answer: B

QUESTION 3

A web client submits a request to `http://localhost:8081/books/0471767840`. The value "0471767840" is captured by a Set Variable transformer to a variable named `bookISBN`. What is the DataWeave expression to access `bookISBN` later in the flow?

- A. `bookISBN`
- B. `attributes.bookISBN`
- C. `flowVars.bookISBN`
- D. `vars. bookISBN`

Correct Answer: D

QUESTION 4

A Mule application contains a global error handler configured to catch any errors. Where must the global error handler be specified so that the global error handler catches all errors from flows without their own error handlers?

- A. A configuration properties file
- B. Nowhere, the global error handler is automatically used
- C. A global element
- D. The `pom.xml` file

Correct Answer: C

QUESTION 5

What is the output type of the DataWeave map operator?


- A. String
- B. Array
- C. Map
- D. Object

Correct Answer: B

QUESTION 6

Refer to the exhibits.

A web client sends a GET request to the HTTP Listener. What response message is returned to the web client?

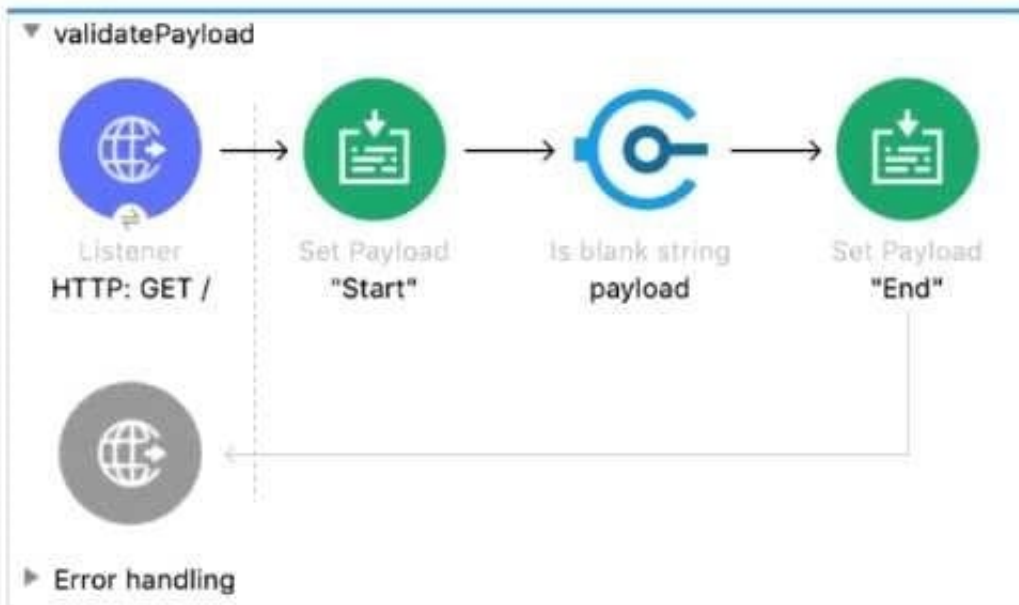

- A. ""
- B. "End"
- C. "Start"
- D. "String is not blank"

Correct Answer: D

QUESTION 7

What are the features of CloudHub Fabric?

- A. Non-persistent queue
- B. Horizontal Scaling

C. VPN Mock Services


D. None of these

Correct Answer: B

QUESTION 8

Refer to the exhibits. A web client sends a POST request to the HTTP Listener and the Validation component in the Try scope throws an error.

What response message is returned to the web client?

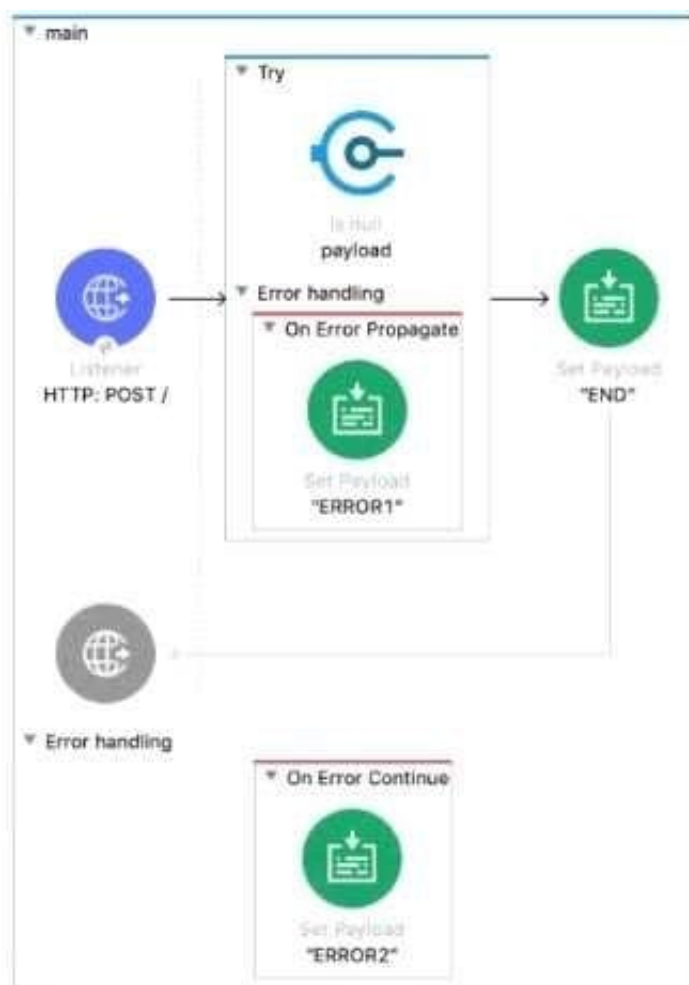


```
<flow name="main">
  <http:listener doc:name="HTTP: POST /" config-ref="HTTP_Listener_config" path="/" >
  </http:listener>
  <try doc:name="Try" >
    <validation:is-null doc:name="payload" value="#[payload]" message="Validation Error"/>
    <error-handler >
      <on-error-propagate enableNotifications="true" logException="true"
        doc:name="On Error Propagate">
        <set-payload value="'ERROR1'" doc:name="'ERROR1'" />
      </on-error-propagate>
    </error-handler>
  </try>
  <set-payload value="'END'" doc:name="'END'" />
  <error-handler >
    <on-error-continue enableNotifications="true" logException="true"
      doc:name="On Error Continue" >
      <set-payload value="'ERROR2'" doc:name="'ERROR2'" />
    </on-error-continue>
  </error-handler>
</flow>
```

- A. Validation Error
- B. "END"
- C. "ERROR1"
- D. "\\ERROR2"

Correct Answer: D

QUESTION 9

Where would you create SLA Tiers for an API?


- A. Exchange
- B. API Manager
- C. Anypoint MQ
- D. Within the API

Correct Answer: B

QUESTION 10

Refer to the exhibit.

In the execution of the Scatter-Gather, the "steep 1 sec" Flow Reference takes about 1 second to complete, and the "sleep 5 sees" Row Reference takes about 5 seconds to complete. About how many seconds does it take from the time the Scatter-Gather is called until the Set Payload transformer is called?

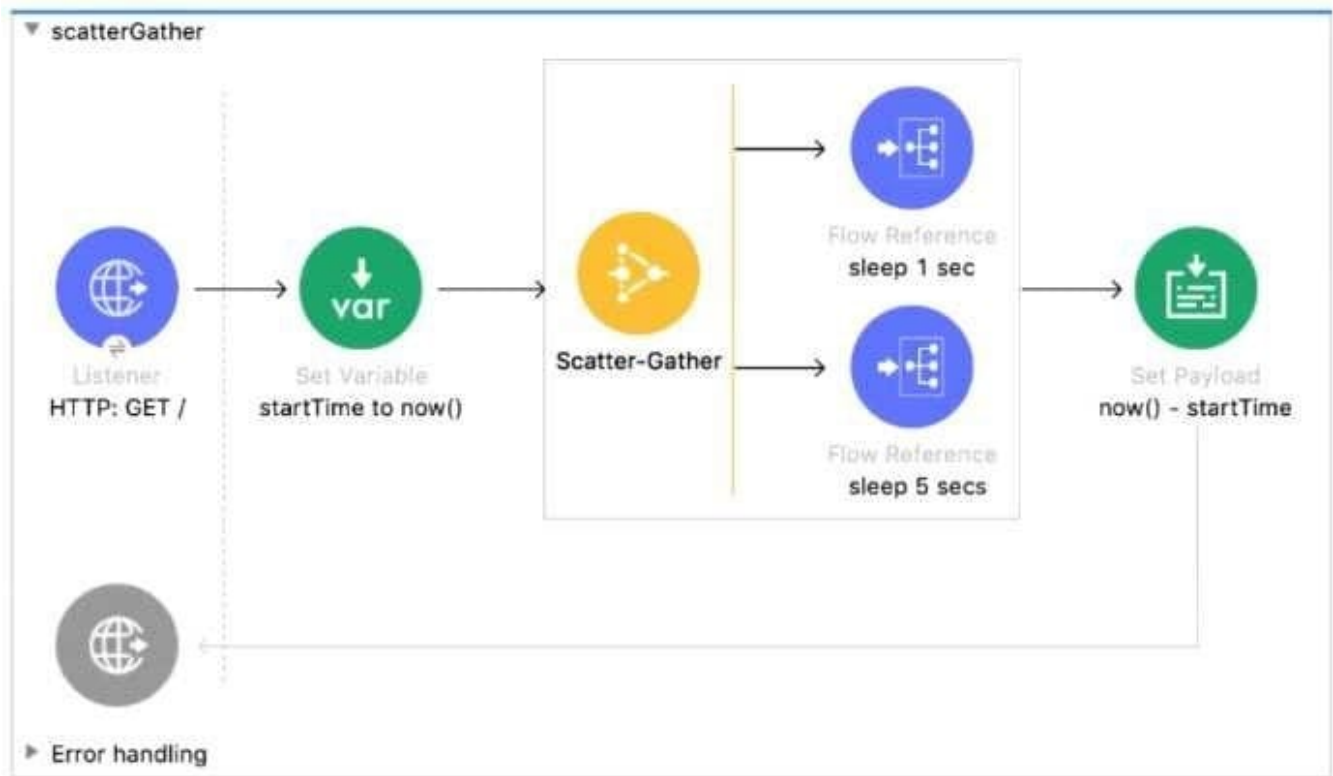

A. 0

B. 1

C. 5

D. 6

Correct Answer: C

QUESTION 11

A web client sends a request to `http://localhost:8081?dept=sales`. What is the correct DataWeave expression to access the value of `dept`?

A. `attributes.queryParams.dept`

B. `attributes.dept`

C. `message.queryParams.dept`

D. `vars.dept`

Correct Answer: A

QUESTION 12

According to Mulesoft, how are Modern APIs treated as?

- A. products
- B. code
- C. soap services
- D. organizations

Correct Answer: A

QUESTION 13

Refer to the exhibits.



```

<flow name="logPayload" >
  <scheduler doc:name="Scheduler" >
    <scheduling-strategy >
      <fixed-frequency />
    </scheduling-strategy>
  </scheduler>
  <set-payload value="#[{'year': '2020'}]" doc:name="{ 'year': '2020' }" />
  <logger level="INFO" doc:name="Logger" message="???" />
</flow>
  
```

The Set Payload transformer's value is set to `{'year': '2020'}`. What message value should be added to the Logger component to output the message `The year is 2020`, without hardcoding 2020?

- A. `#[The year is $(pay load .year)]*`
- B. `The year is #[payload.year]`
- C. `#[The year is " + payload.year]`
- D. `#[The year is "++ payload.year]`

Correct Answer: D

QUESTION 14

According to MuleSoft, what is the first step to create a Modern API?

- A. Gather a list of requirements to secure the API
- B. Create an API specification and get feedback from stakeholders
- C. Performance tune and optimize the backend systems and network
- D. Create a prototype of the API implementation

Correct Answer: B

QUESTION 15

What is the DataWeave expression to log the Content-Type header using a Logger component?

- A. #["Content-Type: " ++ attributes.headers.\\'content-type\\']
- B. #["Content-Type: " ++ headers.\\'content-type\\']
- C. #["Content-Type: " + headers.\\'content-type\\']
- D. #["Content-Type: " + attributes.headers.\\'content-type\\']

Correct Answer: A

[MCD-LEVEL1-DELTA
Practice Test](#)

[MCD-LEVEL1-DELTA Exam
Questions](#)

[MCD-LEVEL1-DELTA
Braindumps](#)