

# UIPATH-RPAV1<sup>Q&As</sup>

UIPATH-RPAV1 : UiPath RPA Associate v1.0 Exam (UiRPA)

## Pass UiPath UIPATH-RPAV1 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/uiopath-rpav1.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by UiPath  
Official Exam Center

- ⚙ **Instant Download** After Purchase
- ⚙ **100% Money Back** Guarantee
- ⚙ **365 Days** Free Update
- ⚙ **800,000+** Satisfied Customers



## QUESTION 1

Based on best practices, how can the integer value, MyInteger, be displayed inside a Write Line activity?

- A. "The value is \$MyInteger"
- B. "The value is " + MyInteger
- C. "The value is " = MyInteger
- D. "The value is " + MyInteger.ToString

Correct Answer: D

---

## QUESTION 2

When is the Anchor Base activity used to automate interaction with an application?

- A. When all the element selectors in the application are reliable
- B. When the element selector is reliable but the element's position on the screen changes
- C. When no element selectors are available in the automated application
- D. When the element selector is not reliable and the element's position on the screen changes

Correct Answer: D

---

## QUESTION 3

A developer wants to create a process using a Flow Switch activity. What is a feature of this activity?

- A. Default case is executed before the expression is evaluated
- B. Default case is executed if no cases match the expression
- C. Two Default cases can be defined
- D. Supports up to three expressions by default

Correct Answer: B

---

## QUESTION 4

A developer created a datatable, dt\_Users, as shown in the following exhibit:

The 'Build Data Table' dialog box shows a table with two columns. The first column is labeled 'User ID (String)' and the second column is labeled 'UserName (String)'. Both columns have a plus sign (+) in the top-left corner and a minus sign (-) in the top-right corner. There are also edit icons (pencil) next to each column header. The dialog has 'OK' and 'Cancel' buttons at the bottom right.

User ID (String)	UserName (String)

After populating the datatable variable, the developer wants to assign each row in dt\_Users to a Dictionary variable, DictUsers. In addition, the developer wants to assign the user IDs to the keys and the usernames to the values inside a For Each Row activity.

The 'For Each Row in Data Table' activity configuration shows 'CurrentRow' as the loop variable and 'dt\_Users' as the data source. The body contains an 'Assign' activity. The 'Assign' activity has a 'To' field and an 'Enter VB expression' field. The 'To' field is currently empty, and the 'Enter VB expression' field is also empty.

How should the Assign activity be configured?

- A. `CurrentRow(1).ToString = DictUsers(CurrentRow(0))`
- B. `DictUsers(CurrentRow(0)) = CurrentRow(1).ToString`
- C. `DictUsers(CurrentRow(0)) = DictUsers(CurrentRow(1))`
- D. `DictUsers(CurrentRow(1)) = DictUsers(CurrentRow(0))`

Correct Answer: B

---

## QUESTION 5

When a work ow is started in Run mode, what happens when there is a breakpoint on an activity?

- A. Work ow executes without pausing at the activity
- B. Workflow pauses at the activity until the Continue button is clicked
- C. Work ow throws an error when it reaches the activity
- D. Work ow pauses for 5 seconds when it reaches the activity

Correct Answer: A

---

## QUESTION 6

What should you use to make sure that the workflow continues no matter what activity fails?

- A. TimeoutMS property
- B. ContinueOnError property
- C. Try catch activity

Correct Answer: BC

---

## QUESTION 7

A developer is designing a work ow that performs the following activities:

1.

Gets text from a web page

2.

Stores the text in a String variable

3.

Performs validations on the string format

4.

Saves the final result in a text file

As the developer is building the workflow, from which panel can a variable be created?

A. Activities Panel

B. Properties Panel

C. Project Panel

D. Locals Panel

Correct Answer: B

---

## QUESTION 8

A developer has created a string array variable as shown below:

```
UsersArray = {"Jane", "Jill", "John"}
```

Which expression should the developer use in a Log Message activity to print the elements of the array separated by the symbol "," as a string?

A. String.Concat(UsersArray, ",")

B. String.Join(UsersArray, ",")

C. String.Concat(",", UsersArray)

D. String.Join(",", UsersArray)

Correct Answer: D

---

## QUESTION 9

What happens if you use the write range activity with the range property set to write a database to excel that already contains data?

A. It will throw an error

---

- B. It will overwrite the existing data
- C. It will append the new data to the existing data

Correct Answer: B

---

## QUESTION 10

What is Orchestrator used for?

- A. Remotely controlling any number of robots and performing workflow management
- B. Designing workflows to be run by robots in a supervised mode
- C. Running Windows processes on the local machine
- D. Designing workflows to be run by robots in an unsupervised mode

Correct Answer: A

---

## QUESTION 11

What describes a full selector?




- A. Recommended when performing multiple actions in the same window
- B. Contains all elements needed to identify a UI element excluding the top-level window
- C. Generated by the Desktop Recorder
- D. Contains all elements needed to identify a UI element including the top-level window D


Correct Answer: D

---

## QUESTION 12

What represents a sequence that contains an activity with a partial selector?

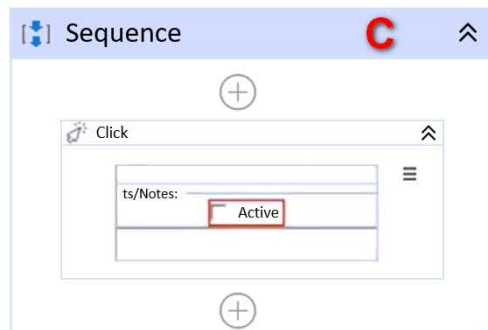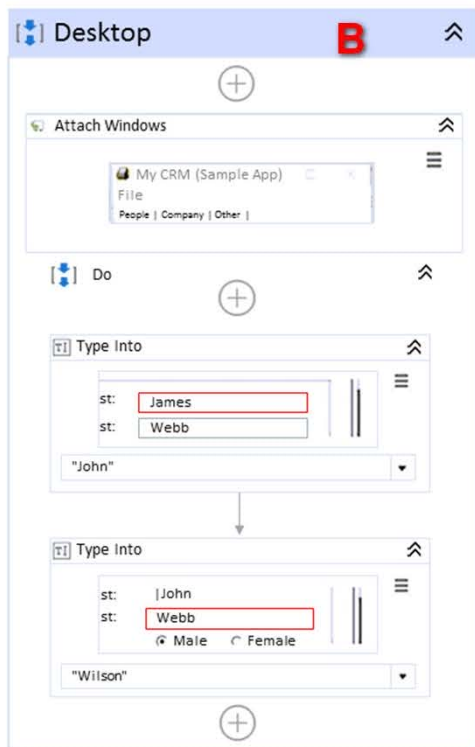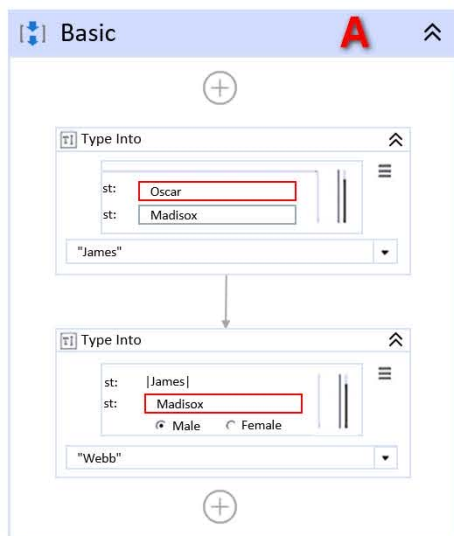

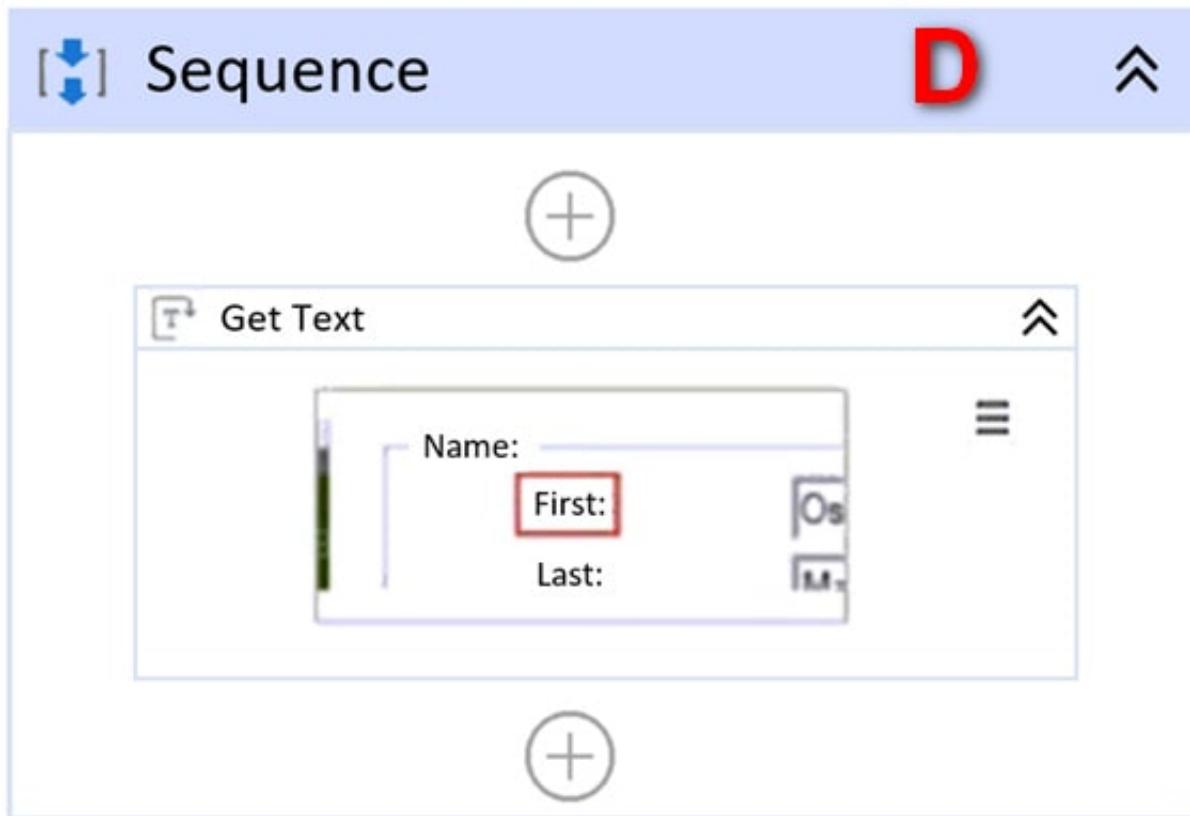

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: B

### QUESTION 13

If an argument is renamed from the Arguments panel, what happens?

A. Argument name must be manually updated only in UI Automation activities that use that argument

B. Argument direction will be updated to "In/Out" when renamed

C. Argument name must be manually updated in all activities that use that argument

D. Argument name is automatically updated in all activities that use that argument


Correct Answer: D



## QUESTION 14

### DRAG DROP

A developer wants to use the same Click activity to click on all items on the Menu Bar of the Notepad application.

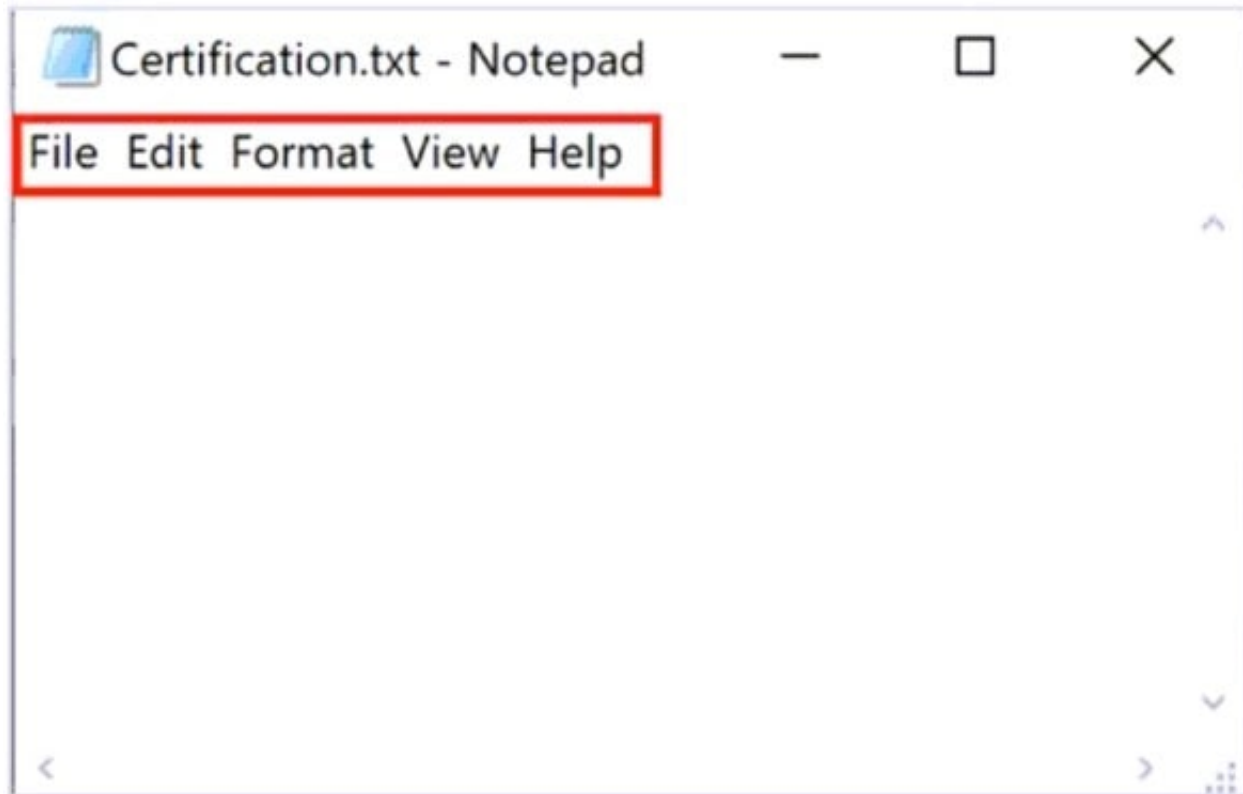

Based on the exhibit, what is the correct sequence of steps that should be performed to update the dynamic variable?

Instructions: Drag the Description found on the left and drop on the correct Step found on the right.

Select and Place:

## Description

## Step Sequence

Replace the word "File" in the name attribute with the variable MenuBarItem with a default value of File

**Step 1**

Indicate the element "File" from the Menu Bar in Notepad

**Step 2**

Validate the changes and click OK in the Selector Editor window

**Step 3**

Create a variable named "MenuBarItem" and Open the Selector Editor window

**Step 4**

Correct Answer:

## Description

## Step Sequence

Indicate the element "File" from the Menu Bar in Notepad

**Step 1**

Validate the changes and click OK in the Selector Editor window

**Step 2**

Replace the word "File" in the name attribute with the variable MenuBarItem with a default value of File

**Step 3**

Create a variable named "MenuBarItem" and Open the Selector Editor window

**Step 4**

## QUESTION 15

The best way of managing variable values within a workflow, so that they can be shared on different robots and environments is:

- A. Using excel config files
- B. Using assets defined in Orchestrator
- C. Using Json config files

Correct Answer: B

[Latest UIPATH-RPAV1  
Dumps](#)

[UIPATH-RPAV1 PDF  
Dumps](#)

[UIPATH-RPAV1 Practice  
Test](#)