

## DES-5221<sup>Q&As</sup>

Specialist Implementation Engineer Data Center Networking Exam

**Pass EMC DES-5221 Exam with 100% Guarantee**

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.leads4pass.com/des-5221.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by EMC  
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



## QUESTION 1

The network administrator wants to configure RADIUS authentication for VTY access, and for console access to use the local configuration. Which two commands should be used to achieve this goal?

- A. aaa authentication login vty group radius aaa authentication login console local
- B. aaa authentication login default group radius aaa authentication login console local
- C. aaa authentication login vty radius aaa authentication login console group local
- D. aaa authentication login default group radius aaa authentication login console group local

Correct Answer: B

---

## QUESTION 2

What is the function of the authentication service?

- A. Validates the user identity
- B. Determines switch management commands
- C. Validates switch order
- D. Determines which services the user is enabled to access

Correct Answer: A

---

## QUESTION 3

What is a valid OS10 iBGP configuration?


- A. S2(config)# router bgp 64507 S2(config-router-bgp-64507)# peer-as 64507 S2(config-router-bgp-64507)# neighbor 192.168.32.1 S2(config-router-neighbor)# update-source loopback 0 S2(config-router-neighbor)# no shutdown
- B. S2(config)# router bgp 64507 S2(config-router-bgp-64507)# neighbor 192.168.32.1 S2(config-router-bgp-64507)# remote-as 64507 S2(config-router-bgp-64507)# update-source loopback 0 S2(config-router-bgp-64507)# no shutdown
- C. S2(config)# router bgp 64507 S2(config-router-bgp-64507)# neighbor 192.168.32.1 S2(config-router-neighbor)# remote-as 64507 S2(config-router-neighbor)# update-source loopback 0 S2(config-router-neighbor)# no shutdown
- D. S2(config)# router bgp 64507 S2(config-router-bgp-64507)# remote-as 64507 S2(config-router-bgp-64507)# neighbor 192.168.32.1 S2(config-router-neighbor)# update-source loopback 0 S2(config-router-neighbor)# no shutdown

Correct Answer: C

Reference: [https://www.dell.com/support/manuals/us/en/04/networking-z9100/os10-enterprise-user-guide-10\\_4\\_1-pub/enable-bgp?guid=guid-5c64be15-4ebd-4372-a442-67f47b0f14e5&lang=en-us](https://www.dell.com/support/manuals/us/en/04/networking-z9100/os10-enterprise-user-guide-10_4_1-pub/enable-bgp?guid=guid-5c64be15-4ebd-4372-a442-67f47b0f14e5&lang=en-us)

---

## QUESTION 4

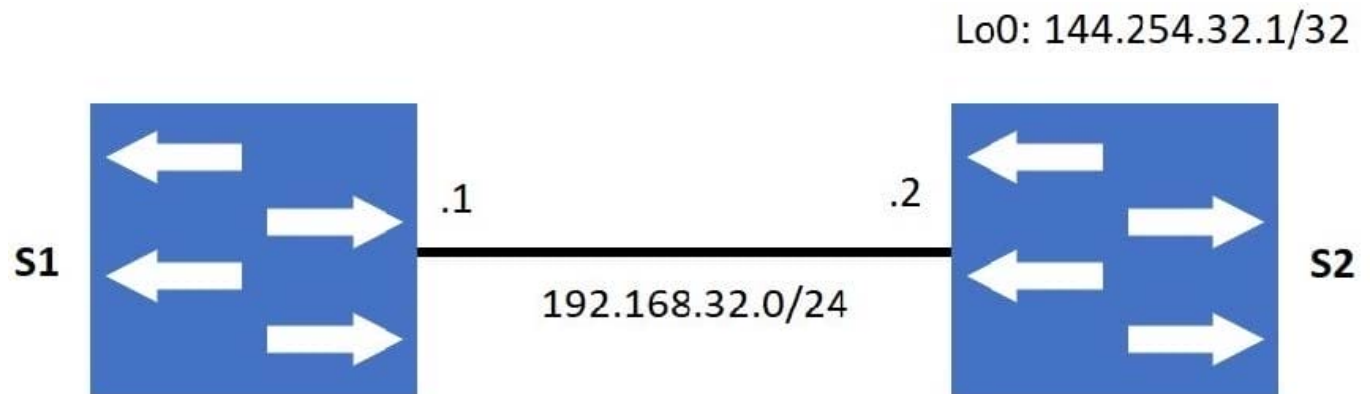

Refer to the exhibit.

Which configuration will allow S1 to ping S2's Lo0 address?

- A. S1(config-router)# ip route 144.254.32.1 192.168.32.2/32
- B. S1(config-router)# ip route 192.168.32.2 144.254.32.1/32
- C. S1(config)# ip route 144.254.32.1/32 192.168.32.2
- D. S1(config)# ip route 192.168.32.2 144.254.32.1/32

Correct Answer: C

## QUESTION 5

What is a feature of virtual routing and forwarding (VRF)?

- A. Provides trunks that can be grouped to provide optimum speed.
- B. Allows multiple user groups to co-exist within the same router at the same time.
- C. Allows different physical switches to operate as one.
- D. Allows multiple instances of routing tables to co-exist within the same router at the same time.

Correct Answer: D

[Latest DES-5221 Dumps](#)

[DES-5221 PDF Dumps](#)

[DES-5221 Braindumps](#)